


Special variants on request









(Figure similar)

Figure	Circuit board dimensions ⁽¹⁾	Inputs digital	Outputs digital	Inputs analog	Connection ⁽²⁾	Coated ⁽³⁾	LED status display ⁽⁴⁾	Input voltage (sensor supply) ⁽⁵⁾	Output voltage (actuator supply) ⁽⁶⁾	ASi address ⁽⁷⁾	Art.no.
	29,7mm x 36,5mm	1	1 x	—	wiring pins, straight	no	no	out of ASi	out of ASi	1 AB address	BWR1566
	29,7mm x 36,5mm	2	2 x electronic	—	solder lugs	no	no	out of ASi	out of ASi	1 AB address	BWR1421
	29,7mm x 36,5mm	2	2 x electronic	—	wiring pins, straight	no	no	out of ASi	out of ASi	1 AB address	BWR3189
	29,7mm x 36,5mm	2	2 x electronic	—	solder lugs, screw terminals only to ASi pins	no	no	out of ASi	out of ASi	1 AB address	BWR1957
	29,7mm x 36,5mm	2	2 x electronic	—	screw terminals	no	no	out of ASi	out of ASi	1 AB address Profile: S-7.A.7.E	BWR2782
	29,7mm x 36,5mm	2	2 x electronic	—	screw terminals	no	no	out of ASi	out of ASi	1 AB address	BWR1443
	29,7mm x 36,5mm	2 (input mirrored)	2 x electronic	—	screw terminals	yes	no	out of ASi	out of ASi	1 AB address	BWR2393
	73mm x 37,5mm	4	3 x electronic	—	solder lugs	no	no	out of ASi	out of ASi	1 AB address	BWR1408
	73mm x 37,5mm	4	3 x electronic	—	solder lugs	no	yes	out of ASi	out of AUX	1 AB address	BWR1682
	73mm x 37,5mm	4	3 x electronic	—	plug-in spring-type terminals	no	no	out of ASi	out of ASi	1 AB address	BWR2229
	73mm x 37,5mm	4	3 x electronic	—	screw terminals	no	no	out of ASi	out of ASi	1 AB address	BWR1387
	73mm x 37,5mm	4	3 x electronic	—	wiring pins, angled	no	no	out of ASi	out of ASi	1 AB address	BWR1386
	73mm x 37,5mm	4	4 x electronic	—	solder lugs	no	no	out of ASi	out of ASi	1 single address	BWR2052
	73mm x 37,5mm	4	4 x electronic	—	solder lugs	no	yes	out of ASi	out of ASi	1 single address	BWR1468
	73mm x 37,5mm	4	4 x electronic	—	solder lugs	no	yes	out of ASi	out of AUX	1 AB address	BWR2442
	73mm x 37,5mm	4	4 x electronic	—	socket board	no	no	out of ASi	out of ASi	1 AB address	BWR3116
	73mm x 37,5mm	4	4 x electronic	—	connecting wires, 200 mm	yes, thick coated	yes	out of ASi	out of ASi	1 single address	BWR2597
	73mm x 37,5mm	4	4 x electronic	—	connecting wires, 200 mm	yes, thick coated	yes	out of ASi	out of ASi	1 AB address	BWR2571
	73mm x 37,5mm	4	4 x electronic	—	wiring pins, angled	no	no	out of ASi	out of ASi	1 single address	BWR1218
	73mm x 37,5mm	4	4 x electronic	—	wiring pins, angled	no	yes	out of ASi	out of AUX	1 single address	BWR2591
	73mm x 37,5mm	4	4 x electronic	—	wiring pins, angled	yes	yes	out of AUX	out of AUX	1 AB address	BWR3215
	73mm x 37,5mm	4	4 x electronic	—	wiring pins, straight	yes	yes	out of AUX	out of AUX	1 AB address	BWR3214
	73mm x 37,5mm	4	4 x electronic	—	wiring pins, straight	yes, thick coated	yes	out of AUX	out of AUX	1 AB address	BWR3213
	73mm x 37,5mm	4	4 x electronic	—	plug-in spring-type terminals	no	no	out of ASi	out of ASi	1 AB address	BWR1889

Figure	Circuit board dimensions ⁽¹⁾	Inputs digital	Outputs digital	Inputs analog	Connection ⁽²⁾	Coated ⁽³⁾	LED status display ⁽⁴⁾	Input voltage (sensor supply) ⁽⁵⁾	Output voltage (actuator supply) ⁽⁶⁾	ASi address ⁽⁷⁾	Art.no.
	73mm x 37,5mm	4	4 x electronic	—	screw terminals	no	no	out of ASi	out of ASi	1 single address	BWR1219
	73mm x 37,5mm	4	4 x electronic	—	screw terminals	no	no	out of AUX	out of AUX	1 single address	BWR1389
	73mm x 37,5mm	4	4 x electronic	—	screw terminals	no	yes	out of ASi	out of ASi	1 single address	BWR1470
	73mm x 37,5mm	4	4 x electronic	—	screw terminals	no	yes	out of ASi	out of AUX	1 single address	BWR1628
	73mm x 37,5mm	4	4 x electronic	—	screw terminals	yes	yes	out of ASi	out of ASi	1 AB address	BWR3190
	73mm x 37,5mm	4	4 x electronic	—	screw terminals	yes	yes	out of ASi	out of ASi	1 single address	BWR1789
	73mm x 37,5mm	4	4 x electronic	—	screw terminals	yes, thick coated	yes	out of AUX	out of AUX	1 AB address	BWR2803
	73mm x 37,5mm	4	—	—	connecting wires, 200 mm	yes, thick coated	yes	out of ASi	—	1 AB address	BWR2842
	73mm x 37,5mm	8	—	—	connecting wires, 200 mm	yes, thick coated	no	out of ASi	—	2 AB addresses	BWR2774
	73mm x 37,5mm	8	—	—	wiring pins, angled	no	no	out of ASi	—	2 AB addresses	BWR1351
	73mm x 37,5mm	8	—	—	screw terminals	no	no	out of ASi	—	2 AB addresses	BWR1352
	73mm x 37,5mm	—	6 x electronic	—	screw terminals	no	no	—	out of ASi	2 AB addresses	BWR1627

(1) **Circuit board dimensions:** 2 holes for assembly angles.

(2) **Connection:** further connection options are available on request.

screw terminals nominal cross section 0,5 mm ²	wiring pins, angled contact spacing 2,54 mm	wiring pins, straight contact spacing 2,54 mm	solder lugs contact spacing 2,54mm	socket board nominal cross section 0,65 mm ²	plug-in spring type terminals nominal cross section 0,5 mm ²	connecting wires nominal cross section 0,34 mm Length 100 / 200 mm (other lengths available on request)
						

(3) **Coating:** coating protects components and circuit boards when touched.

coated	thick coated
	

(4) **LED status display:** status of in- and outputs is indicated by LEDs. In addition to that, both ASi LEDs (PWR green and FAULT red) show - as usual regarding the ASi nodes - the status of the ASi nodes. Uaux is indicated by a green LED.

(5) **Input voltage (sensor supply):** inputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, inputs shall not be connected to earth or to external potential.

(6) **Output voltage (actuator supply):** outputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, outputs shall not be connected to earth or to external potential.

(7) **ASi address:** AB address (max. 62 AB addresses/ASi network), 2 AB addresses (max. 31 modules with 2 AB addresses), single addresses (max. 31 single addresses/ASi network), mixed use allowed. For modules with two ASi nodes the second ASi node is turned off as long as the first ASi node is addressed to address "0". Upon request, ASi nodes are available with specific ASi address profiles.

For technical data on further devices, see the next pages!

Article no.	BWR1566	BWR3189	BWR2782	BWR1443	BWR2393	BWR1957	BWR1421
Connection							
ASi / peripheral connection	wiring pins, straight		screw terminals			solder lugs, screw terminals only to ASi pins	solder lugs
Length of connector cable	I/O: max. 1,5 m ⁽¹⁾						
ASi							
Profile	S-B.A.E, ID1=F (default)	S-B.A.E, ID1=7 (default)	S-7.A.7, ID1=E (default)	S-B.A.E, ID1=7 (default)		S-B.A.E, ID1=F (default)	S-B.A.E, ID1=7 (default)
Address	1 AB address						
Required Master profile	≥M3						
Since ASi specification	2.1						
Operating voltage	30 V (18 ... 31,6 V)						
Max. current consumption	120 mA	130 mA					
AUX							
Operating voltage	-						
Max. current consumption	-						
Inputs digital							
Number	1	2					
Power supply	out of ASi						
Power supply of attached sensors	max. 80 mA, $\sum (In/Out) \leq 80 \text{ mA}$						
Input level	$U_{in} < 2 \text{ V low}$, $U_{in} > 10 \text{ V high}$						
Outputs digital							
Number	1	2					
Power supply	out of ASi						
Max. current consumption	80 mA per output, $\sum (In/Out) \leq 80 \text{ mA}$						
Display							
LED indicators	no						
UL Recognized Component							
In general	RU mark does not provide UL certification for any functional safety rating or aspects of the above devices						
External protection	The input to the devices need to be provided with a fuse rated 4 A max or else the devices need to be powered from a class 2 or a SELV limited power source.						
Environment							
Applied standards	EN 61 000-6-2 EN 61 000-6-3 EN 60529						
Operating altitude	max. 2000 m						
Ambient temperature	-25 °C ... +70 °C						
Storage temperature	-25 °C ... +85 °C						
Protection class	IP00						
Tolerable loading referring to humidity	according to EN 61131-2						
Coating	no				yes	no	
Allowed shock and vibration stress	$\leq 15g$, $T \leq 11 \text{ ms}$, 10 ... 55 Hz, 0,5 mm amplitude						
Weight	15 g						
Dimensions (W / H / D in mm)	29,7 / 36,5 / 10						

⁽¹⁾ loop resistance: ≤150 Ω

Article no.	BWR2229	BWR1387	BWR1386	BWR1408	BWR1682
Connection					
ASi / AUX / peripheral connection	plug-in spring-type terminals	screw terminals	wiring pins, angled	solder lugs	
Length of connector cable	I/O: max. 1,5 m ⁽¹⁾				
ASi					
Profile	S-7.A.E, ID1=7 (default)			S-7.A.E, ID1=F (default)	
Address	1 AB address				
Required Master profile	≥M3				
Since ASi specification	2.1				
Operating voltage	30 V (18 ... 31,6 V)				
Max. current consumption	220 mA				230 mA
AUX					
Voltage	–				24 V (18 ... 30 V)
Max. current consumption	–				500 mA
Inputs digital					
Number	4				
Power supply	out of ASi				
Power supply of attached sensors	max. 180 mA, Σ (In/Out) ≤180 mA				max. 180 mA
Input level	U _{in} <2 V low, U _{in} >10 V high				
Outputs digital					
Number	3				
Power supply	out of ASi				out of AUX
Max. current consumption	100 mA per output, Σ (In/Out) ≤180mA				250 mA per output, Σ ≤500 mA
Display					
LED indicators	no				yes
UL Recognized Component					
In general	UL mark does not provide UL certification for any functional safety rating or aspects of the above devices				
External protection	The input to the devices need to be provided with a fuse rated 4 A max or else the devices need to be powered from a class 2 or a SELV limited power source.				
Environment					
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 60529				
Operating altitude	max. 2000 m				
Ambient temperature	-25 °C ... +70 °C				-25 °C ... +60 °C
Storage temperature	-25 °C ... +85 °C				
Protection class	IP00				
Tolerable loading referring to humidity	according to EN 61131-2				
Coating	no				
Allowed shock and vibration stress	≤15g, T≤11 ms, 10 ... 55 Hz, 0,5 mm amplitude				
Weight	27 g				
Dimensions (W / H / D in mm)	73 / 37,5 / 12	73 / 37,5 / 7	73 / 37,5 / 10	73 / 37,5 / 7	73 / 37,5 / 10


⁽¹⁾ loop resistance: ≤150 Ω

Article no.		BWR3116	BWR3190	BWR2571	BWR2597	BWR1468	BWR2052	BWR2442
Connection								
ASi / AUX / peripheral connection		socket board	screw terminals	connecting wires, 200 mm			solder lugs	
Length of connector cable		I/O: max. 1,5 m ⁽¹⁾						
ASi								
Profile		S -7.A.7, ID1=7 (fixed)			S -7.0.E, ID1=F (de- fault)	S -7.0.F, ID1=F (default)		S -7.A.7, ID1=7 (fixed)
Address		1 AB address			1 single address			1 AB address
Required Master profile		≥M4			≥M0			≥M4
Since ASi specification		3			2			3
Operating voltage		18 ... 31,6 V						
Max. current consumption		230 mA			310 mA		300 mA	230 mA
AUX								
Voltage		–						24 V (18 ... 30 V)
Max. current consumption		–						500 mA
Inputs digital								
Number		4						
Power supply		out of ASi						
Power supply of attached sensors	up to 50 °C	max. 180 mA, Σ (In/Out) ≤180 mA			max. 260 mA, Σ (In/Out) ≤260 mA ⁽²⁾		max. 180 mA	
	at 55 °C				max. 240 mA, Σ (In/Out) ≤240 mA ⁽²⁾			
	at 70 °C				max. 180 mA, Σ (In/Out) ≤180 mA ⁽²⁾			
Input level		U _{in} <2 V low, U _{in} >10 V high						
Outputs digital								
Number		4						
Power supply		out of ASi						out of AUX
Max. current consumption	up to 50 °C	100 mA per output, Σ (In/Out) ≤180 mA			100 mA per output, Σ (In/Out) ≤260 mA ⁽²⁾		250 mA per output Σ ≤500 mA	
	at 55 °C				100 mA per output, Σ (In/Out) ≤240 mA ⁽²⁾			
	at 70 °C				100 mA per output, Σ (In/Out) ≤180 mA ⁽²⁾			
Display								
LED indicators		no	yes				no	yes
UL Recognized Component								
In general		UL mark does not provide UL certification for any functional safety rating or aspects of the above devices						
External protection		The input to the devices need to be provided with a fuse rated 4 A max or else the devices need to be powered from a class 2 or a SELV limited power source.						
Environment								
Applied standards		EN 61000-6-2 EN 61000-6-3 EN 60529						
Operating altitude		max. 2000 m						
Ambient temperature		-25 °C ... +70 °C						-25 °C ... +60 °C
Storage temperature		-25 °C ... +85 °C						
Protection class		IP00		IP54		IP00		
Tolerable loading referring to humidity		according to EN 61131-2						
Coating		no	yes	yes, thick coated			no	
Allowed shock and vibration stress		≤15g, T≤11 ms, 10 ... 55 Hz, 0,5 mm amplitude						
Weight		27 g						
Dimensions (W / H / D in mm)		73 / 37,5 / 7		73 / 37,5 / 13				73 / 37,5 / 10

(1) loop resistance: $\leq 150 \Omega$

(2)

BWR1468, BWR2052, BWR2597 Derating total current of inputs/outputs

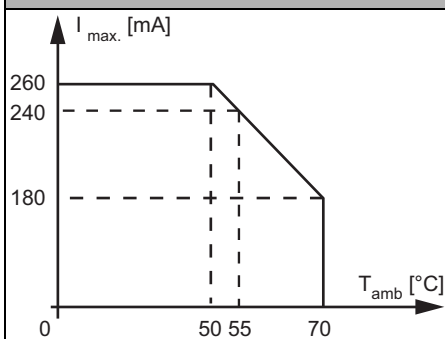


Article no.		BWR3213	BWR3214	BWR3215	BWR2591	BWR1218	BWR1889
Connection							
ASi / AUX / peripheral connection		wiring pins, straight		wiring pins, angled			plug-in spring-type terminals
Length of connector cable		I/O: max. 1,5 m ⁽¹⁾					
ASi							
Profile		S -7.A.7, ID1=7 (fixed)		S-7.0.E, ID1=F (default)	S-7.0.F, ID1=F (default)	S -7.A.7, ID1=7 (fixed)	
Address		1 AB address		1 single address			1 AB address
Required Master profile		≥M4		≥M0			≥M4
Since ASi specification		3		2			3
Operating voltage		30 V (18 ... 31,6 V)					
Max. current consumption		60 mA			310 mA	300 mA	230 mA
AUX							
Voltage		24 V (18 ... 30 V)				–	
Max. current consumption		2,1 A			500 mA	–	
Inputs digital							
Number		4					
Power supply		out of AUX			out of ASi		
Power supply of attached sensors	up to 50 °C	directly out of AUX			max. 260 mA	max. 260 mA, $\sum (In/Out) \leq 260 \text{ mA}^{(2)}$	max. 180 mA, $\sum (In/Out) \leq 180 \text{ mA}$
	at 55 °C					max. 240 mA, $\sum (In/Out) \leq 240 \text{ mA}^{(2)}$	
	at 70 °C					max. 240 mA, $\sum (In/Out) \leq 180 \text{ mA}^{(2)}$	
Input level		U _{in} < 2 V low, U _{in} >10 V high					

Article no.		BWR3213	BWR3214	BWR3215	BWR2591	BWR1218	BWR1889
Outputs digital							
Number		4					
Power supply		out of AUX				out of ASi	
Max. current consumption	up to 50 °C	250 mA per output, Σ ≤500 mA				100 mA per output Σ (In/Out) ≤260 mA ⁽²⁾	100 mA per output, Σ (In/Out) ≤180mA
	at 55 °C					100 mA per output, Σ (In/Out) ≤240 mA ⁽²⁾	
	at 70 °C					100 mA per output, Σ (In/Out) ≤180 mA ⁽²⁾	
Display							
LED indicators		yes				no	
UL Recognized Component							
In general		UL mark does not provide UL certification for any functional safety rating or aspects of the above devices					
External protection		The input to the devices need to be provided with a fuse rated 4 A max or else the devices need to be powered from a class 2 or a SELV limited power source.					
Environment							
Applied standards		EN 61000-6-2 EN 61000-6-3 EN 60529					
Operating altitude		max. 2000 m					
Ambient temperature		-25 °C ... +70 °C			-25 °C ... +60 °C	-25 °C ... +70 °C	
Storage temperature		-25 °C ... +85 °C					
Protection class		IP00					
Tolerable loading referring to humidity		according to EN 61131-2					
Coating		yes, thick coated	yes			no	
Allowed shock and vibration stress		≤15g, T≤11 ms, 10 ... 55 Hz, 0,5 mm amplitude					
Weight		27 g					
Dimensions (W / H / D in mm)		73 / 37,5 / 10				73 / 37,5 / 7	73 / 37,5 / 12

(1) loop resistance: $\leq 150 \Omega$

(2)

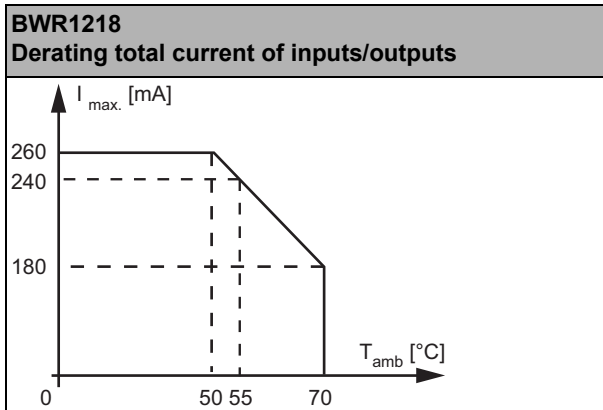


Article no.		BWR1389	BWR1219	BWR1470	BWR1789	BWR1628	BWR2803
Connection							
ASi / AUX / peripheral connection		screw terminals					
Length of connector cable		I/O: max. 1,5 m ⁽¹⁾					
ASi							
Profile		S-7.0.F, ID1=F (default)			S-7.0.E, ID1=F (default)	S-7.A.7, ID1=7 (fixed)	
Address		1 single address					1 AB address
Required Master profile		≥M0					≥M4
Since ASi specification		2					3
Operating voltage		30 V (18 ... 31,6 V)					
Max. current consumption		40 mA	300 mA	310 mA		60 mA	
AUX							
Voltage		24 V (18 ... 30 V)	–			24 V (18 ... 30 V)	
Max. current consumption		200 mA	–			500 mA	2,1 A
Inputs digital							
Number		4					
Power supply		out of AUX	out of ASi				out of AUX
Power supply of attached sensors	up to 50 °C	max. 180 mA, Σ (In/Out) ≤180 mA	max. 260 mA, Σ (In/Out) ≤260 mA ⁽²⁾			no power supply	directly out of AUX
	at 55 °C		max. 240 mA, Σ (In/Out) ≤240 mA ⁽²⁾				
	at 70 °C		max. 180 mA, Σ (In/Out) ≤180 mA ⁽²⁾				
Input level		U _{in} < 2 V low, U _{in} >10 V high					
Outputs digital							
Number		4					
Power supply		out of AUX	out of ASi			out of AUX	
Max. current consumption	up to 50 °C	100 mA per output, Σ (In/Out) ≤180 mA	100 mA per output, Σ (In/Out) ≤260 mA ⁽²⁾			250 mA per output, Σ ≤500 mA	
	at 55 °C		100 mA per output, Σ (In/Out) ≤240 mA ⁽²⁾				
	at 70 °C		100 mA per output, Σ (In/Out) ≤180 mA ⁽²⁾				
Display							
LED indicators		no			yes		
UL Recognized Component							
In general		RU mark does not provide UL certification for any functional safety rating or aspects of the above devices					
External protection		The input to the devices need to be provided with a fuse rated 4 A max or else the devices need to be powered from a class 2 or a SELV limited power source.					

Article no.	BWR1389	BWR1219	BWR1470	BWR1789	BWR1628	BWR2803
Environment						
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 60529					
Operating altitude	max. 2000 m					
Ambient temperature	-25 °C ...+60 ° C	-25 °C ... +70 °C			-25 °C ... +60 °C	
Storage temperature	-25 °C ... +85 °C					
Protection class	IP00					
Tolerable loading referring to humidity	according to EN 61131-2					
Coating	no			yes	no	yes, thick coat- ed
Allowed shock and vibration stress	≤15g, T≤11 ms, 10 ... 55 Hz, 0,5 mm amplitude					
Weight	27 g					
Dimensions (W / H / D in mm)	73 / 37.5 / 10		73 / 37.5 / 13		73 / 37.5 / 10	

(1) loop resistance: ≤150 Ω

(2) **BWR1219, BWR1470, BWR1789**
Derating total current of inputs/outputs

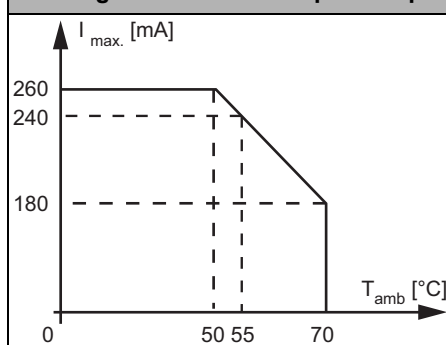

Article no.	BWR2842	BWR2774	BWR1352	BWR1351	BWR1627
Connection					
ASi / AUX / peripheral connection	connecting wires, 200 mm		screw terminals	wiring pins, angled	screw terminals
Length of connector cable	I/O: max. 1,5 m ⁽¹⁾				
ASi					
Profile	S -7.A.7, ID1=7 (fixed)	2 x S-0.A.2, ID1=7 (default)			2 x S-8.A.0, D1=7 (default)
Address	1 AB address	2 AB addresses			
Required Master profile	≥M4	≥M3			
Since ASi specification	3	2.1			
Operating voltage	30 V (18 ... 31,6 V)				
Max. current consumption	230 mA				
AUX					
Voltage	—				
Max. current consumption	—				

Article no.	BWR2842	BWR2774	BWR1352	BWR1351	BWR1627
Inputs digital					
Number	4	8			–
Power supply	out of ASi				–
Power supply of attached sensors	max. 180 mA				–
Input level	U _{in} < 2 V low, U _{in} >10 V high				
Outputs digital					
Number	–				6
Power supply	–				out of ASi
Max. current consumption	–				100 mA per output, Σ ≤180 mA
Display					
LED indicators	yes	no			
UL Recognized Component					
In general	UL mark does not provide UL certification for any functional safety rating or aspects of the above devices				
External protection	The input to the devices need to be provided with a fuse rated 4 A max or else the devices need to be powered from a class 2 or a SELV limited power source.				
Environment					
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 60529				
Operating altitude	max. 2000 m				
Ambient temperature	-25 °C ... +70 °C				-25 °C ... +60 °C
Storage temperature	-25 °C ... +85 °C				
Protection class	IP54		IP00		
Tolerable loading referring to humidity	according to EN 61131-2				
Coating	yes, thick coated		no		
Allowed shock and vibration stress	≤15g, T≤11 ms, 10 ... 55 Hz, 0,5 mm amplitude				
Weight	27 g				
Dimensions (W / H / D in mm)	73 / 37,5 / 13	73 / 37,5 / 10		73 / 37,5 / 7	73 / 37,5 / 10

(1) loop resistance: ≤ 150 Ω

Programming	Bit Setting Digital IO							
	ASi node 1				ASi node 2			
	D0	D1	D2	D3	D0	D1	D2	D3
	input							
BWR1566	—		I1	—	—			
BWR1421, BWR1443, BWR1957, BWR2782, BWR3189	—		I1	I2	—			
BWR1218, BWR1219, BWR1387, BWR1386, BWR1389, BWR1408, BWR1468, BWR1470, BWR1628, BWR1682, BWR1789, BWR1889, BWR2052, BWR2229, BWR2442, BWR2571, BWR2591, BWR2597, BWR2803, BWR2842, BWR3116, BWR3190, BWR3213, BWR3214, BWR3215	I1	I2	I3	I4	—			
BWR1351, BWR1352, BWR2774	I1	I2	I3	I4	I5	I6	I7	I8
BWR1627	—							
BWR2393	I1	I2	I1	I2	—			
	output							
BWR1566	O1	—			—			

Programming	Bit Setting Digital IO							
	ASi node 1				ASi node 2			
BWR1421, BWR1443, BWR1957, BWR2782, BWR3189	O1	O2	—		—			
BWR1386, BWR1387, BWR1408, BWR1682, BWR2229	O1	O2	O3	—	—			
BWR1218, BWR1219, BWR1389, BWR1468, BWR1470, BWR1628, BWR1789, BWR1889, BWR2052, BWR2442, BWR2571, BWR2591, BWR2597, BWR2803, BWR3116, BWR3190, BWR3213, BWR3214, BWR3215	O1	O2	O3	O4	—			
BWR1351, BWR1352, BWR2774	—							
BWR1627	O1	O2	O3	—	O4	O5	O6	—
BWR2393	O1	O2	—		—			

Programming	Parameter bit			
	P0	P1	P2	P3
BWR1421, BWR1443, BWR1566, BWR1957, BWR2393, BWR3189	not used			
BWR1218, BWR1219, BWR1386, BWR1387, BWR1389, BWR1408, BWR1468, BWR1470, BWR1628, BWR1682, BWR1789, BWR2052, BWR2229, BWR2442, BWR2591, BWR2803, BWR3190, BWR3213, BWR3214, BWR3215	not used			
BWR1351, BWR1352, BWR2774	not used			
BWR1627	not used			
BWR2782	0=off / 1=on (Watchdog)	0=on / 1=off (data input filter)	not used	not used
BWR1889, BWR2571, BWR2597, BWR2842, BWR3116			0=on / 1=off (synchronous I/O mode)	

Programming	
BWR1218, BWR1219, BWR1386, BWR1387, BWR1389, BWR1408, BWR1421, BWR1443, BWR1470, BWR1566, BWR1628, BWR1682, BWR1789, BWR1889, BWR1957, BWR2229, BWR2393, BWR2571, BWR2597, BWR2782, BWR2803, BWR2842, BWR3116, BWR3189, BWR3190, BWR3213, BWR3214, BWR3215	Address preset 0 changeable via bus master or programming devices
BWR1351, BWR1352, BWR2774	Address preset 0 + 0, changeable only via ASi Master in configuration mode.
BWR1627	Address preset 0 + 1, changeable only via ASi Master in configuration mode.
Position of DIP switch	
BWR1351, BWR1352, BWR1627, BWR2774	1  ON 1: 2. ASi node is activated ON: 2. ASi node is deactivated

Connections:	
ASi +, ASi -	Connection to the ASi bus
Ix	Input x
Ox	Output x
0 V	Reference potential for outputs
+ or +24V	Output for 24 V power supply for the inputs
+24 V_in	Input for 24 V power supply
+24 V_12, +24_34	Output for 24 V power supply for inputs 1+2 and/or 3+4
Sig1+, Sig2+	Positive terminal of analog inputs 1+2
Sig1-, Sig2-	Negative terminal of analog inputs 1+2
n.c.	not connected

Dimensional drawings	
BWR1421, BWR1443, BWR1566, BWR1957, BWR2393, BWR2782, BWR3189	BWR1218, BWR1219, BWR1351, BWR1386, BWR1389, BWR1408, BWR1468, BWR1470, BWR1627, BWR1628, BWR1682, BWR1789, BWR1889, BWR2052, BWR2229, BWR2442, BWR2571, BWR2591, BWR2597, BWR2774, BWR2803, BWR2842, BWR3116, BWR3190, BWR3213, BWR3214, BWR3215
	BWR1352, BWR1387

LED assignment	
BWR1468, BWR1470, BWR1789, BWR2571, BWR2597, BWR3190	BWR1628, BWR2442, BWR2591, BWR2803, BWR3213, BWR3214, BWR3215

LED assignment

BWR2842

FAULT



AS-i



I4



I3



I2



I1



BWR1682

FAULT



ASi



O3



O2



O1



U_{AUX}



I4



I3



I2




I1



Connection assignment

BWR1421, BWR1443, BWR1566, BWR1957, BW2392, BWR2782, BWR3189



BWR1218, BWR1219, BWR1351, BWR1352, BWR1386, BWR1387, BWR1389, BWR1408, BWR1468, BWR1470, BWR1627, BWR1628, BWR1682, BWR1789, BWR1889, BWR2052, BWR2229, BWR2442, BWR2571, BWR2591, BWR2597, BWR2774, BWR2803, BWR2842, BWR3116, BWR3190, BWR3213, BWR3214, BWR3215




Notice


You shall not connect wiring with connections marked **n.c.** (**not connected**).

Terminal diagram


BWR1421, BWR1443, BWR1957, BWR2782, BWR3189

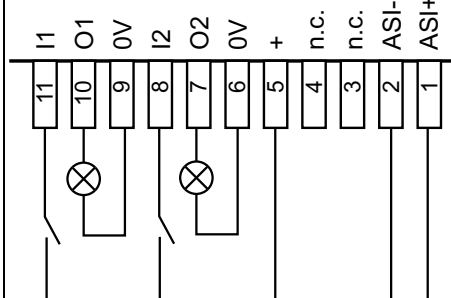


BWR1218, BWR1219, BWR1468, BWR1470, BWR1789, BWR1889, BWR2052, BWR2597, BWR3116, BWR3190

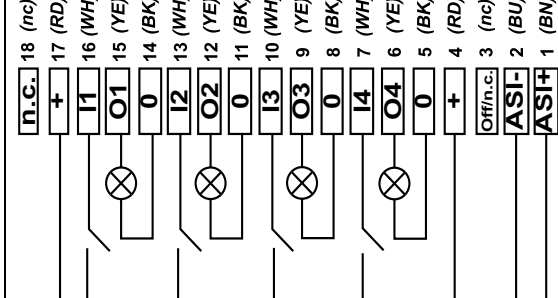

BWR1389

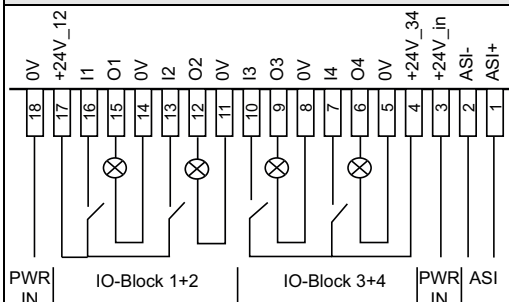



BWR1351, BWR1352, BWR2774

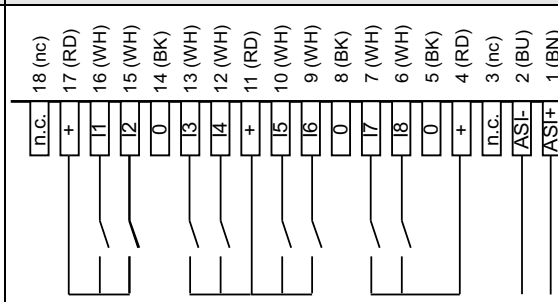


BWR1627

BWR1628


Terminal diagram

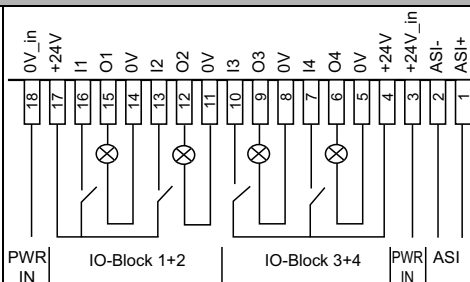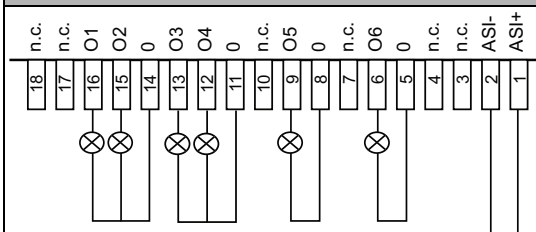


BWR2393




BWR1682

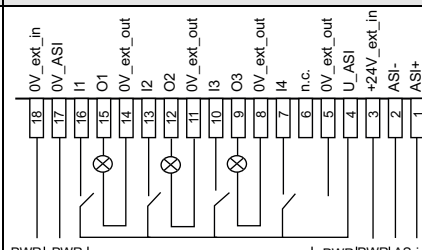

BWR2442, BWR2591

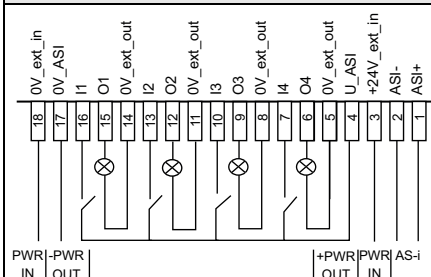


BWR2803, BWR3213, BWR3214, BWR3215

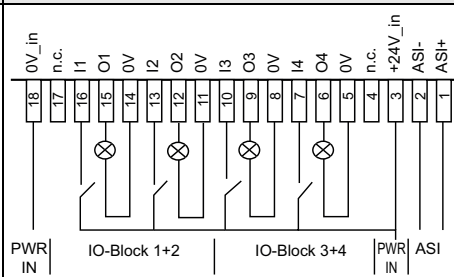


BWR2842



BWR1566

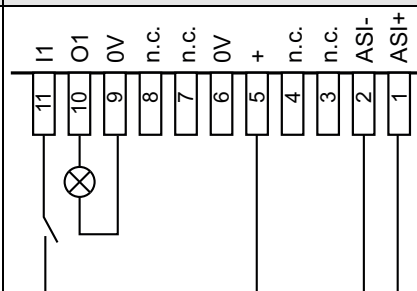

BWR2571

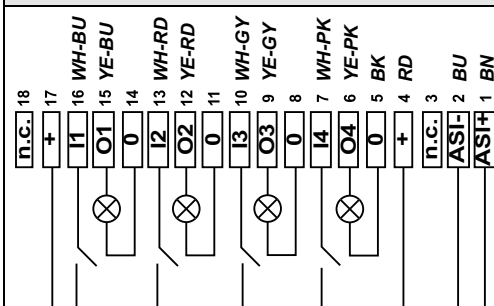

BWR1386, BWR1387, BWR1408, BWR2229

