

2 x 2 connectors for profile cable

2 color LEDs per output,
state (yellow), overload (red) (optional)



(Figure similar)

Figure	Inputs digital	Outputs digital	M12 connection ⁽¹⁾	Input voltage (sensor supply) ⁽²⁾	Output voltage (actuator supply) ⁽³⁾	ASi connection ⁽⁴⁾	ASi address ⁽⁵⁾	Max. output current	Art. no.
	2	2 x electronic	Y	out of ASi	out of AUX	ASi profile cable	1 AB address	1 A per output	BWU3456
	2	2 x electronic, special ASi bit assignment	Y	out of ASi	out of AUX	ASi profile cable	1 AB address	1 A per output	BWU3539
	2	2 x electronic, special ASi bit assignment	Y	out of ASi	out of AUX	ASi profile cable	1 single address	1 A per output	BWU3775
	2	2 x electronic	single	out of ASi	out of AUX	ASi profile cable	1 AB address	1 A per output	BWU3141
	2	2 x electronic	single	out of ASi	out of AUX	ASi via M12	1 AB address	1 A per output	BWU3517
	4	–	Y	out of ASi	–	ASi profile cable	1 AB address	–	BWU2552
	4	–	Y	out of ASi	–	ASi via M12	1 AB address	–	BWU3077
	4	–	single	out of ASi	–	ASi profile cable	1 AB address	–	BWU2620
	4	–	single	out of ASi	–	ASi profile cable	1 AB address S-0.A.7.0	–	BWU3556
	4	–	single	out of ASi	–	ASi via M12	1 AB address	–	BWU3457
	4	–	single	out of AUX	–	ASi profile cable	1 AB address	–	BWU2725
	4	2 x electronic	mixed	out of AUX	out of AUX	ASi profile cable	1 AB address	1 A per output	BWU2767
	4	4 x electronic	mixed	out of ASi	out of ASi	ASi profile cable	1 AB address	120 mA per output	BWU3240
	4	4 x electronic	mixed	out of AUX	out of AUX	ASi profile cable	1 AB address	500 mA per output	BWU2547
	4	4 x electronic	mixed (inputs/outputs swapped)	out of AUX	out of AUX	ASi profile cable	1 AB address	500 mA per output	BWU3887
	4	4 x electronic	Y	out of ASi	out of AUX	ASi profile cable	1 AB address	500 mA per output	BWU2487
	4	4 x electronic	Y	out of AUX	out of AUX	ASi profile cable	1 AB address	500 mA per output	BWU3032
	4	3 x electronic	Y	out of ASi	out of AUX	ASi profile cable	1 AB address	500 mA per output	BWU3375
	–	4 x electronic	Y	–	out of AUX	ASi profile cable	1 single address	1 A per output	BWU2713
	–	4 x electronic	Y	–	out of AUX	ASi profile cable	1 AB address	1 A per output	BWU2594
	–	4 x electronic	Y	–	out of AUX, 2A per output	ASi profile cable	1 AB address	2 A per output	BWU2728

Figure	Inputs digital	Outputs digital	M12 connection ⁽¹⁾	Input voltage (sensor supply) ⁽²⁾	Output voltage (actuator supply) ⁽³⁾	ASi connection ⁽⁴⁾	ASi address ⁽⁵⁾	Max. output current	Art. no.
	4	4 x electronic	Y	out of ASi	out of AUX	ASi profile cable	1 AB address	1 A per output	BWU2626
	4	4 x electronic	Y	out of ASi	out of AUX	ASi profile cable	1 AB address	2 A per output	BWU3426
	4	4 x electronic	single	out of ASi	out of AUX	ASi profile cable	1 AB address	1 A per output	BWU2617
	4	4 x electronic	single	out of ASi	out of AUX	ASi profile cable	1 single address	1 A per output	BWU2684
	4	4 x electronic	single	out of AUX	out of AUX	ASi profile cable	1 AB address	1 A per output	BWU2810
	4	4 x electronic	Y	out of AUX	out of AUX	ASi profile cable	1 AB address	1 A per output	BWU3510
	4	4 x electronic	single	out of AUX	out of AUX	ASi using M12	1 AB address	1 A per output	BWU2645
	4	4 x electronic	single	out of ASi	out of AUX, 2A per output	ASi profile cable	1 single address	2 A per output	BWU3540
	4	3 x electronic	single	out of ASi	out of AUX, 2A per output	ASi profile cable	1 AB address	2 A per output	BWU3496
	8	—	Y	out of AUX	—	ASi profile cable	2 AB addresses	—	BWU2770
	8	—	Y	out of ASi	—	ASi profile cable	2 AB addresses	—	BWU2651
	8	—	single	out of ASi	—	ASi profile cable	2 AB addresses	—	BWU2983
	8	8 x electronic	Y	out of ASi	out of AUX	ASi profile cable	2 AB addresses	1 A per output	BWU2619
	8	8 x electronic	Y	out of AUX	out of AUX	ASi profile cable	2 AB addresses	1 A per output	BWU3892
	—	8 x electronic	Y	—	out of AUX	ASi profile cable	2 AB addresses	1 A per output	BWU2652

Replacement, ASi Version 2: single addresses (digital) are also working with the first generation ASi masters.

- (1) **M12 wiring:**
Single wiring: 1 input or output per connection.
Y wiring: 2 inputs or outputs per connection.
Mixed wiring: 1 input and 1 output per connection.
- (2) **Input voltage (sensor supply):** inputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, inputs shall not be connected to earth or to external potential.
- (3) **Output voltage (actuator supply):** outputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, outputs shall not be connected to earth or to external potential
- (4) **ASi connection:** the connection to ASi as well to AUX (auxiliary 24 V power) is made via yellow resp. black ASi profile cable with piercing technology or via M12 socket (in IP20 via clamps).
- (5) **ASi address:** AB addresses (max. 62 AB addresses/ASi network), 2 AB addresses (max. 31 modules with 2 AB addresses), Single addresses (max. 31 Single addresses/ASi network), mixed use allowed. For modules with two ASi nodes the 2nd ASi node is turned off as long as the 1st ASi node is addressed to address "0". Upon request, ASi nodes are available with specific ASi node profiles.


Article No.		BWU3077	BWU2552	BWU2620	BWU3556	BWU3457	BWU2725
General data							
Device type		input					
Connection							
ASi/AUX connection		M12 ⁽¹⁾	profile cable and piercing technology			M12 ⁽¹⁾	profile cable and piercing technology
Periphery connection		M12, Y-wiring		M12,single-wiring			
Length of connector cable		unlimited ⁽²⁾					
ASi							
Profile		S-0.A.E (ID1=7 default)			S-0.A.0 (ID1=7 default)	S-0.A.E (ID1=7 default)	S-0.A.E (ID1=7 default)
Address		1 AB address					
Required Master profile		≥M3					
As of ASi specification		2.1					
Operating voltage		30 V (18 ... 31.6 V)					
Max. current consumption		165 mA					45 mA
Max. current consumption without sensor/ actuator supply		45 mA					
AUX							
Operating voltage		–					24 V (18 ... 30 V)
Max. current consumption		–					1 A
Input							
Number		4					
Power supply		out of ASi					out of AUX
Sensor supply		short-circuit and overload protected according to EN 61131-2					
Power supply of attached sensors	up to +40 °C	120 mA ⁽³⁾					max. 1 A
	at +55 °C	100 mA ⁽³⁾					
	at +70 °C	80 mA ⁽³⁾					
Switching threshold		U<5 V (low) U>15 V (high)					
Display							
LED ASi (green)		on: ASi voltage on flashing: ASi voltage on, but peripheral fault ⁽⁴⁾ or address 0 off: no ASi voltage					
LED FLT/FAULT (red)		on: address 0 or offline flashing: peripheral fault ⁽⁴⁾ off: online					
LED AUX (green)		–					on: 24 V _{DC} AUX off: no 24 V _{DC} AUX
LEDs I1 ... I4 (yellow)		state of inputs I1 ... I4					

Article No.	BWU3077	BWU2552	BWU2620	BWU3556	BWU3457	BWU2725
Environment						
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529					
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	yes ⁽⁵⁾					yes ⁽⁹⁾
Operating altitude	max. 2000 m					
Ambient temperature	-30 °C ... +55 °C (up to max. +70 °C) ⁽³⁾ ⁽⁶⁾					
Storage temperature	-25 °C ... +85 °C					
Housing	plastic, for screw mounting	plastic, for DIN rail mounting or for screw mounting ⁽⁸⁾			plastic, for screw mounting	plastic, for DIN rail mounting or for screw mounting ⁽⁸⁾
Pollution degree	2					
Protection category	IP67 ⁽⁷⁾					
Tolerable loading referring to humidity	according to EN 61131-2					
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2					
Max. tolerable vibration stress	5 ... 8 Hz 50 mm _{pp} /8 ... 500 Hz 6g, acc. EN 61131-2					
Insulation voltage	≥500 V					
Weight	100 g					
Dimensions (W / H / D) in mm	45 / 116,5 / 47,5	45 / 80 / 42			45 / 116,5 / 47,5	45 / 80 / 42


(1) Line protection:

If the module is supplied via a M12 connection with A or B coding, it may only be used with a current load of max. 4 A per pin in acc. with IEC 61076-2-101 and IEC 61076-2-109. A fused tap is recommended. There is no such limitation for modules supplied via piercing contacts.

Connection to ASi and AUX via M12

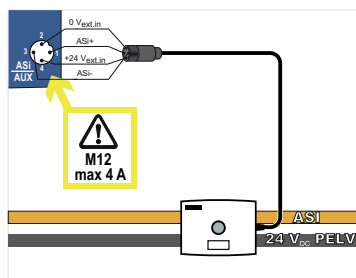


via piercing contacts

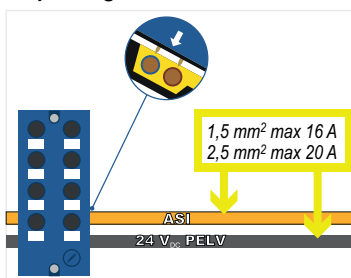

(2) Loop resistance ≤150 Ω

**(3) BWU2552, BWU2620, BWU3077, BWU3457, BWU3556
Derating power supply of attached sensors**

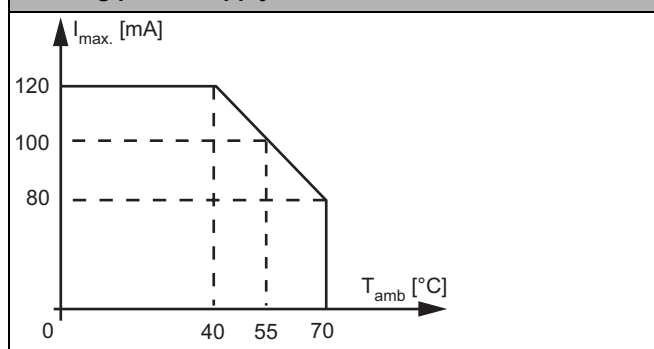

(4) See table "Peripheral fault indication"

- (5) The module is suitable for use in passively safe paths as it has no connection to an AUX potential.
- (6) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada
- (7) Protection category IP67 can only be achieved if all open connections are sealed with suitable end caps fulfilling the same protection category.
- (8) Depending on substructure module (see accessories). The substructure module is not included in the scope of delivery.
- (9) BWU2725 from Ident. No. 18225; The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.

Article No.		BWU2770	BWU2651	BWU2983
General data				
Device type		input		
Connection				
ASi/AUX connection		profile cable and piercing technology		
Periphery connection		M12, Y-wiring	M12, single-wiring	
Length of connector cable		unlimited ⁽¹⁾		
ASi				
Profile		ASi node 1: S-0.A.E (ID1=7 default), ASi node 2: S-0.A.E (ID1=6 default)		
Address		2 AB addresses		
Required Master profile		≥M3		
As of ASi specification		2.1		
Operating voltage		30 V (18 ... 31.6 V)		
Max. current consumption		60 mA	270 mA	
Max. current consumption without sensor/ actuator supply		60 mA	70 mA	
AUX				
Operating voltage		24 V (18 ... 30 V)	–	
Max. current consumption		3 A	–	
Input				
Number		8		
Power supply		out of AUX	out of ASi	
Sensor supply		short-circuit and overload protected according to EN 61131-2		
Power supply of attached sensors	up to +40 °C	max. 1 A	200 mA ⁽⁶⁾	
	at +55 °C		150 mA ⁽³⁾	
	at +70 °C		100 mA ⁽³⁾	
Switching threshold		U<5 V (low) U>15 V (high)		
Display				
LED ASi/FLT 1 (red/green)		green: online red: offline yellow/red flashing: address 0		
LED ASi/FLT 2 (red/green)		green: online red: offline yellow/red flashing: address 0 red/green flashing: peripheral fault ⁽²⁾ red flashing: ASi node 2 is switched off, because ASi node 1 is offline		
LED AUX (green)		on: 24 V _{DC} AUX off: no 24 V _{DC} AUX	–	
LEDs I1 ... I8 (yellow)		state of inputs I1 ... I8		

Article No.	BWU2770		BWU2651	BWU2983
Environment				
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529			
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	yes ⁽³⁾	yes ⁽⁷⁾		
Operating altitude	max. 2000 m			
Ambient temperature	-30 °C ... +55 °C (up to max. +70 °C) ⁽⁴⁾ ⁽⁶⁾			
Storage temperature	-25 °C ... +85 °C			
Housing	plastic, for screw mounting			
Pollution degree	2			
Protection category	IP67 ⁽⁵⁾			
Tolerable loading referring to humidity	according to EN 61131-2			
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2			
Max. tolerable vibration stress	5 ... 8 Hz 50 mm _{pp} /8 ... 500 Hz 6g, acc. EN 61131-2			
Insulation voltage	≥500 V			
Weight	200 g			
Dimensions (W / H / D) in mm	60 / 151 / 31			

(1) Loop resistance ≤150 Ω

(2) **See table "Peripheral fault indication"**


(3) BWU2770 from Ident. No. ≥18654; The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.

(4) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada

(5) Protection category IP67 can only be achieved if all open connections are sealed with suitable end caps fulfilling the same protection category.

(6)

BWU2651, BWU2983 Derating power supply of attached sensors

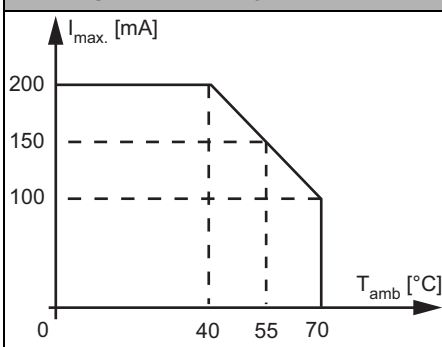

(7) The module is suitable for use in passively safe paths as it has no connection to an AUX potential.


Article No.		BWU3775	BWU3539	BWU3456	BWU3141
General data					
Device type		input / output			
Connection					
ASi/AUX Connection		profile cable and piercing technology			
Periphery connection		M12, Y-wiring			M12, single-wiring
Length of connector cable		unlimited ⁽¹⁾			
ASi					
Profile		S-7.0.E (ID1=F default)	S-7.A.7 (ID1=7 fixed)		
Address		1 single address	1 AB address		
Required Master profile		≥M0	≥M4		
As of ASi specification		2.0	3.0		
Operating voltage		30 V (18 ... 31.6 V)			
Max. current consumption		165 mA			
Max. current consumption without sensor/ actuator supply		45 mA			
AUX					
Operating voltage		24 V (18 ... 30 V)			
Max. current consumption		2 A			
Input					
Number		2			
Power supply		out of ASi			
Sensor supply		short-circuit and overload protected according to EN 61131-2			
Power supply of attached sensors	up to +40 °C	120 mA ⁽²⁾			
	at +55 °C	90 mA ⁽²⁾			
	at +70 °C	60 mA ⁽²⁾			
Switching threshold		U<5 V (low) U>15 V (high)			
Output					
Number		2			
Power supply		out of AUX			
Output		short-circuit and overload protected according to EN 61131-2			
Max. output current	up to +40 °C	1 A per output, $\sum(\text{Out})$ 2 A ⁽³⁾			
	at +55 °C	1 A per output, $\sum(\text{Out})$ 1,5 A ⁽³⁾			
	at +70 °C	1 A per output, $\sum(\text{Out})$ 1 A ⁽³⁾			
Display					
LED ASi (green)		on: ASi voltage on flashing: ASi voltage on, but peripheral fault ⁽⁴⁾ or address 0 off: no ASi voltage			
LED FLT/FAULT (red)		on: address 0 or offline flashing: peripheral fault ⁽⁴⁾ off: online			
LED AUX (green)		on: 24 V _{DC} AUX off: no 24 V _{DC} AUX			
LEDs I1, I2 (yellow)		state of inputs I1, I2			
LEDs O1 / O2 ... (yellow /red)		–		yellow: state of outputs O1, O2 red: overload	
LEDs O3 / O4 ... (yellow /red)		yellow: state of outputs O3, O4 red: overload		–	

Article No.	BWU3775	BWU3539	BWU3456	BWU3141
Environment				
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529			
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	no ⁽⁵⁾		yes ⁽⁹⁾	
Operating altitude	max. 2000 m			
Ambient temperature	-30 °C ... +55 °C ^{(2) (3) (6)} (up to max. +70 °C)			
Storage temperature	-25 °C ... +85 °C			
Housing	plastic, for DIN rail mounting or for screw mounting ⁽⁷⁾			
Pollution degree	2			
Protection category	IP67 ⁽⁸⁾			
Tolerable loading referring to humidity	according to EN 61131-2			
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2			
Max. tolerable vibration stress	5 ... 8 Hz 50 mm _{pp} /8 ... 500 Hz 6g, acc. EN 61131-2			
Insulation voltage	≥500 V			
Weight	100 g			
Dimensions (W / H / D) in mm	45 / 80 / 42			

(1) Loop resistance ≤150 Ω


(2)

BWU3141, BWU3456, BWU3539, BWU3775 **Derating of power supply of attached sensors**

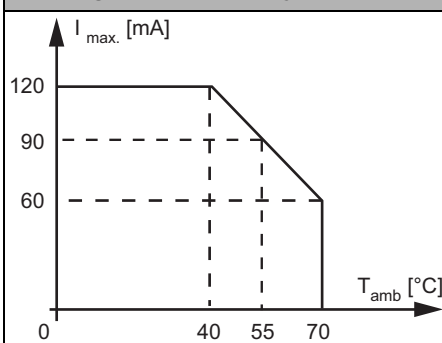

(3)

BWU3141, BWU3456, BWU3539, BWU3775 **Derating total current of outputs**

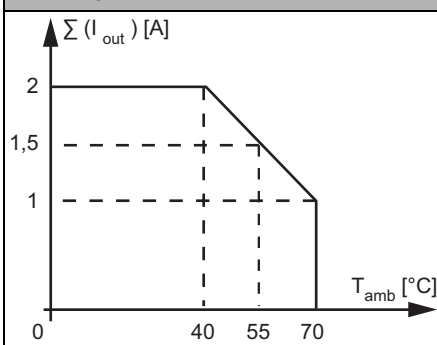

(4) **See table "Peripheral fault indication"**

(5) The module is not suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors cannot be assumed for the connection of the two ASi and AUX potentials.
If the module is supplied from an unswitched AUX cable, this has no influence on the safety consideration for the paths with passively safe-switched AUX cable. In an ASi circuit, paths supplied from a passively safe-switched AUX cable and paths supplied from unswitched AUX potential can be used together.

- (6) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada
- (7) Depending on substructure module (see accessories). The substructure module is not included in the scope of delivery.
- (8) Protection category IP67 can only be achieved if all open connections are sealed with suitable end caps fulfilling the same protection category.
- (9) BWU3456 from Ident.No. 18209; BWU3141 from Ident. No. 18180; The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.

Article No.		BWU2767	BWU2547	BWU3887	BWU3240
General data					
Device type		input / output			
Connection					
ASi/AUX Connection		profile cable and piercing technology			
Periphery connection		M12, mixed- wiring	M12, mixed- wiring (in-puts/outputs swapped)	M12, mixed- wiring	
Length of connector cable		unlimited ⁽¹⁾			
ASi					
Profile		S-7.A.E (ID1=7 default)	S-7.A.7 (ID1=7 fixed)		
Address		1 AB address			
Required Master profile		≥M3	≥M4		
As of ASi specification		3.0			
Operating voltage		30 V (18 ... 31.6 V)			
Max. current consumption		35 mA			165 mA
Max. current consumption without sensor/ actuator supply		35 mA			45 mA
AUX					
Operating voltage		24 V (18 ... 30 V)			–
Max. current consumption		3 A			–
Input					
Number		4			
Power supply		out of AUX			out of ASi
Sensor supply		short-circuit and overload protected according to EN 61131-2			
Power supply of attached sensors	up to +40 °C	max. 1 A			$\sum$ (In/Out) max. 120 mA ⁽¹²⁾
	at +55 °C				$\sum$ (In/Out) 90 mA ⁽¹²⁾
	at +70 °C				$\sum$ (In/Out) 60 mA ⁽¹²⁾
Switching threshold		U<5 V (low) U>15 V (high)			
Output					
Number		2	4		
Power supply		out of AUX			out of ASi
Output		short-circuit and overload protected according to EN 61131-2			
Max. output current	up to +40 °C	1 A per output $\sum$ (Out) 2 A	500 mA per output $\sum$ (Out) 2 A ⁽⁹⁾		$\sum$ (In/Out) 120 mA ⁽¹²⁾
	at +55 °C		500 mA per output $\sum$ (Out) 1,5 A ⁽⁹⁾		$\sum$ (In/Out) 90 mA ⁽¹²⁾
	at +70 °C		500 mA per output $\sum$ (Out) 1 A ⁽⁹⁾		$\sum$ (In/Out) 60 mA ⁽¹²⁾
Display					
LED ASi (green)		on: ASi voltage on flashing: ASi voltage on, but peripheral fault ⁽²⁾ or address 0 off: no ASi voltage			
LED FLT/FAULT (red)		on: address 0 or offline flashing: peripheral fault ⁽²⁾ off: online			
LED AUX (green)		on: 24 V _{DC} AUX off: no 24 V _{DC} AUX			–
LEDs I1 / O1 ... In / On (yellow)		state of inputs/outputs I1 / O1 ...I4 / O4 input or output is on ⁽³⁾			

Article No.	BWU2767	BWU2547	BWU3887	BWU3240
Environment				
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529			
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	yes ⁽⁴⁾	yes ⁽¹⁰⁾	yes ⁽¹¹⁾	yes ⁽¹³⁾
Operating altitude	max. 2000 m			
Ambient temperature	-30 °C ... +55 °C ^{(5) (6) (9) (12)} (up to max. +70 °C)			
Storage temperature	-25 °C ... +85 °C			
Housing	plastic, for DIN rail mounting or for screw mounting ⁽⁷⁾			
Pollution degree	2			
Protection category	IP67 ⁽⁸⁾			
Tolerable loading referring to humidity	according to EN 61131-2			
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2			
Max. tolerable vibration stress	5 ... 8 Hz 50 mm _{pp} /8 ... 500 Hz 6g, acc. EN 61131-2			
Insulation voltage	≥500 V			
Weight	100 g			
Dimensions (W / H / D) in mm	45 / 80 / 42			

(1) Loop resistance ≤150 Ω

(2) **See table "Peripheral fault indication"**

(3) **BWU2767:** LEDs I3/O3 and I4/O4 are indicating only the state of inputs I3 and I4 in accordance with the factual input/output assignment.


(4) BWU2767 from ID no. 18851; The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.

(5) Temperature range up to -30°C from Ident.No. ≥16388 (BWU2767).

(6) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada

(7) Depending on substructure module (see accessories). The substructure module is not included in the scope of delivery.


(8) Protection category IP67 can only be achieved if all open connections are sealed with suitable end caps fulfilling the same protection category.

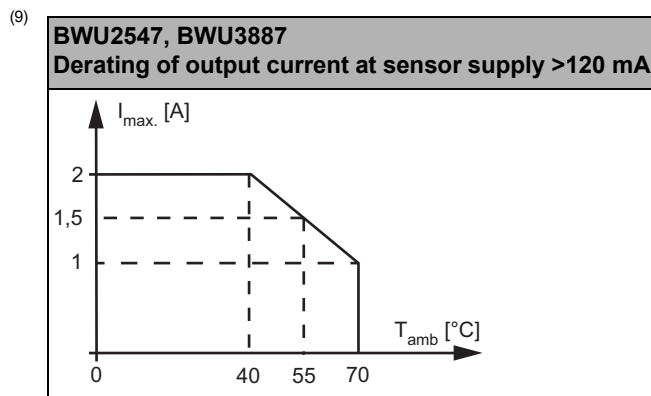

(10) BWU2547 from Ident. No. 18173; The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.

(11) BWU3887 from Ident. No. 18303; The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.

(12)

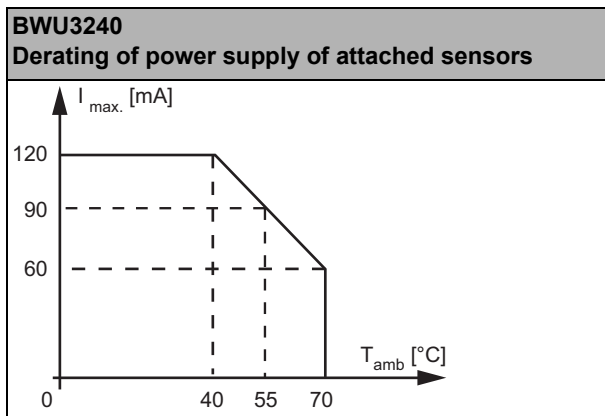


(13) The module is suitable for use in passively safe paths as it has no connection to an AUX potential.

Article No.		BWU2487		BWU3032		BWU3375		BWU3517	
General data									
Device type		input / output							
Connection									
ASi/AUX Connection		profile cable and piercing technology						M12 ⁽⁹⁾	
Periphery connection		M12, Y-wiring						M12, single wiring	
Length of connector cable		unlimited ⁽¹⁾							
ASi									
Profile		S-7.A.7 (ID1=7 fixed)			S-7.A.0 (ID1=7 default)			S-7.A.7 (ID1=7 fixed)	
Address		1 AB address							
Required Master profile		≥M4			≥M3			≥M4	
As of ASi specification		3.0			2.1			3.0	
Operating voltage		30 V (18 ... 31.6 V)							
Max. current consumption		165 mA		45 mA		165 mA			
Max. current consumption without sensor/ actuator supply		45 mA							
AUX									
Operating voltage		24 V (18 ... 30 V)							
Max. current consumption		2 A							
Input									
Number		4						2	
Power supply		out of ASi		out of AUX		out of ASi			
Sensor supply		short-circuit and overload protected according to EN 61131-2							
Power supply of attached sensors	up to +40 °C	120 mA ⁽²⁾		1 A		120 mA ⁽²⁾		120 mA ⁽¹⁰⁾	
	at +55 °C	90 mA ⁽²⁾				90 mA ⁽²⁾		90 mA ⁽¹⁰⁾	
	at +70 °C	60 mA ⁽²⁾				60 mA ⁽²⁾		60 mA ⁽¹⁰⁾	
Switching threshold		U<5 V (low) U>15 V (high)							
Output									
Number		4			3			2	
Power supply		out of AUX							
Output		short-circuit and overload protected according to EN 61131-2							
Max. output current	up to +40 °C	500 mA per output						1 A per output, Σ(Out) 2 A ⁽¹¹⁾	
	at +55 °C							1 A per output, Σ(Out) 1,5 A ⁽¹¹⁾	
	at +70 °C							1 A per output, Σ(Out) 1 A ⁽¹¹⁾	

Article No.	BWU2487	BWU3032	BWU3375	BWU3517
Display				
LED ASI (green)	on: ASi voltage on flashing: ASi voltage on, but peripheral fault ⁽³⁾ or address 0 off: no ASi voltage			
LED FLT/FAULT (red)	on: address 0 or offline flashing: peripheral fault ⁽⁴⁾ off: online			
LED AUX (green)	on: 24 V _{DC} AUX off: no 24 V _{DC} AUX			
LEDs I1 / I2 ... In/In+1 (yellow)	state of inputs I1 / I2 ... I3 / I4: at least 1 input of input pair is on			state of inputs I1 / I2
LEDs O1/O2 ... On / On+1 (yellow)	state of outputs O1 / O2 ... O3 / O4: at least 1 output of output pair is on		state of outputs O1 / O2 ... O3: at least 1 output of out-put pair is on	–
LEDs O1, O2 (yellow / red)	–			yellow: state of outputs O1 / O2 red: overload
Environment				
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529			
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	yes ⁽⁴⁾			no ⁽¹²⁾
Operating altitude	max. 2000 m			
Ambient temperature	-30 °C ... +55 °C ⁽²⁾ ⁽⁵⁾ ⁽⁶⁾ (up to max. +70 °C)			-30 °C ... +55 °C (up to max. +70 °C) ⁽¹⁰⁾ ⁽¹¹⁾ ⁽⁶⁾
Storage temperature	-25 °C ... +85 °C			
Housing	plastic, for DIN rail mounting or for screw mounting ⁽⁷⁾			
Pollution degree	2			
Protection category	IP67 ⁽⁸⁾			
Tolerable loading referring to humidity	according to EN 61131-2			
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2			
Max. tolerable vibration stress	5 ... 8 Hz 50 mm _{pp} /8 ... 500 Hz 6g, acc. EN 61131-2			
Insulation voltage	≥500 V			
Weight	100 g			
Dimensions (W / H / D) in mm	45 / 80 / 42			

(1) Loop resistance ≤150 Ω


(2)

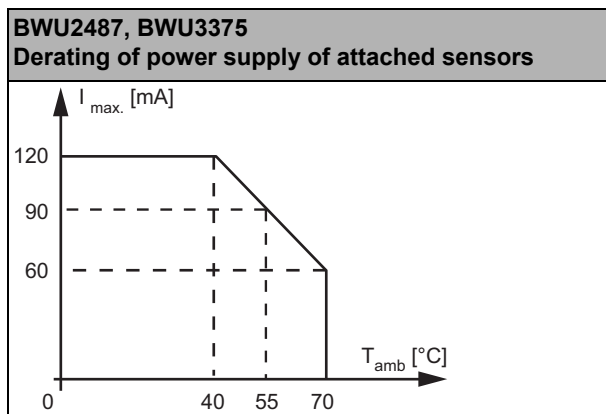


(3) See table "Peripheral fault indication"

- (4) BWU2487 from Ident. No. 18369; BWU3032 from Ident. No. 18285; BWU3375 from Ident. No. 18403; The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.
- (5) Temperature range up to -30°C from Ident.No. ≥16381 (BWU3032).
- (6) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada
- (7) Depending on substructure module (see accessories). The substructure module is not included in the scope of delivery.
- (8) Protection category IP67 can only be achieved if all open connections are sealed with suitable end caps fulfilling the same protection category.
- (9) **Line protection:**
If the module is supplied via a M12 connection with A or B coding, it may only be used with a current load of max. 4 A per pin in acc. with IEC 61076-2-101 and IEC 61076-2-109. A fused tap is recommended. There is no such limitation for modules supplied via piercing contacts.


Connection to ASi and AUX via M12

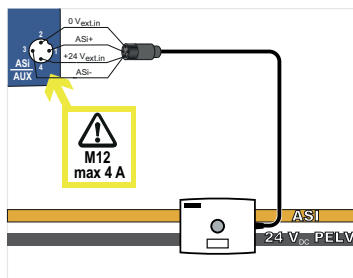


via piercing contacts

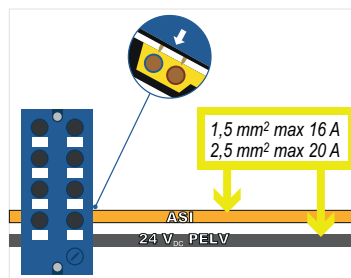

(10) BWU3517 Derating of power supply of attached sensors

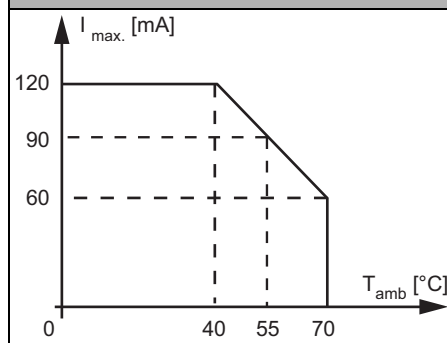

(11) BWU3517 Derating total current of outputs

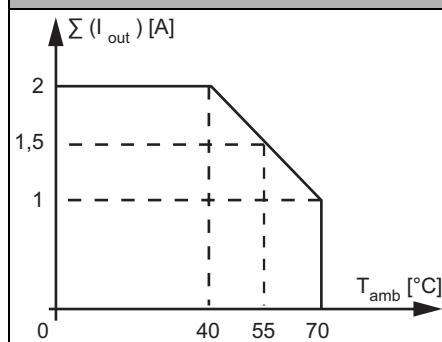


- (12) The module is not suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors cannot be assumed for the connection of the two ASi and AUX potentials.
If the module is supplied from an unswitched AUX cable, this has no influence on the safety consideration for the paths with passively safe-switched AUX cable. In an ASi circuit, paths supplied from a passively safe-switched AUX cable and paths supplied from unswitched AUX potential can be used together.

Article No.		BWU3496	BWU3540	BWU3426	BWU2626	BWU2617	BWU2684
General data							
Device type		input / output					
Connection							
ASi/AUX Connection		profile cable and piercing technology					
Periphery connection		M12, single-wiring		M12, Y-wiring		M12, single-wiring	
Length of connector cable		unlimited ⁽¹⁾					
ASi							
Profile		S-7.A.0 (ID1=7 default)	S-7.0.E (ID1=F default)	S-7.A.7 (ID1=7 fixed)		S-7.0.E (ID1=F default)	
Address		1 AB address	1 single address	1 AB address		1 single address	
Required Master profile		≥M3	≥M0	≥M4		≥M0	
As of ASi specification		2.1	2.0	3.0		2.0	
Operating voltage		30 V (18 ... 31.6 V)					
Max. current consumption		165 mA					
Max. current consumption without sensor/ actuator supply		45 mA					
AUX							
Operating voltage		24 V (18 ... 30 V)					
Max. current consumption		6 A	8 A		3 A		
Input							
Number		4					
Power supply		out of ASi					
Sensor supply		short-circuit and overload protected according to EN 61131-2					
Power supply of attached sensors	up to +40 °C	120 mA ⁽²⁾					
	at +55 °C	100 mA ⁽²⁾					
	at +70 °C	80 mA ⁽²⁾					
Switching threshold		U<5 V (low) U>15 V (high)					
Output							
Number		3	4				
Power supply		out of AUX					
Output		short-circuit and overload protected according to EN 61131					
Max. output current	up to +40 °C	2 A per output, Σ (Out) 6 A ⁽³⁾	2 A per output, Σ (Out) 8 A ⁽³⁾		1 A per output, Σ (Out) 3 A ⁽⁸⁾		
	at +55 °C	1,5 A per out- put, Σ (Out) 4,5 A ⁽³⁾	1,5 A per output, Σ (Out) 6 A ⁽³⁾				
		at +70 °C	1 A per output, Σ (Out) 3 A ⁽³⁾	1 A per output, Σ (Out) 4 A ⁽³⁾		1 A per output, Σ (Out) 2 A ⁽⁸⁾	
Display							
LED ASi (green)		on: ASi voltage on flashing: ASi voltage on, but peripheral fault ⁽⁴⁾ or address 0 off: no ASi voltage					
LED FLT/FAULT (red)		on: address 0 or offline flashing: peripheral fault ⁽⁴⁾ off: online					
LED AUX (green)		on: 24 V _{DC} AUX off: no 24 V _{DC} AUX					
LEDs I1 ... In (yellow)		state of inputs I1 ... I4					
LEDs O1 ... On (yellow)		state of outputs O1 ... O3	state of outputs O1 ... O4		–		state of outputs O1 ... O4
LEDs O1 ... On (yellow / red)		–			yellow: state of outputs O1 ... O4 red: overload		–


Article No.	BWU3496	BWU3540	BWU3426	BWU2626	BWU2617	BWU2684
Environment						
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529					
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	yes ⁽⁵⁾					
Operating altitude	max. 2000 m					
Ambient temperature	-30 °C ... +55 °C ^{(2) (3) (6) (8)} (up to max. +70 °C)					
Storage temperature	-30 °C ... +85 °C					
Housing	plastic, for screw mounting					
Pollution degree	2					
Protection category	IP67 ⁽⁷⁾					
Tolerable loading referring to humidity	according to EN 61131-2					
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2					
Max. tolerable vibration stress	5 ... 8 Hz 50 mm _{pp} /8 ... 500 Hz 6g, acc. EN 61131-2					
Insulation voltage	≥500 V					
Weight	200 g					
Dimensions (W / H / D) in mm	60 / 151 / 31					

(1) Loop resistance ≤150 Ω

(2) **BWU2617, BWU2626, BWU3426, BWU2684, BWU3496, BWU3540**
Derating of power supply of attached sensors

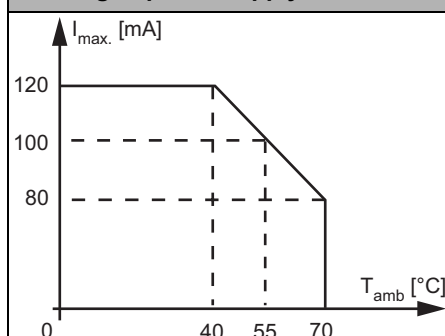

(3) **BWU3426, BWU3496, BWU3540**
Derating output current per output

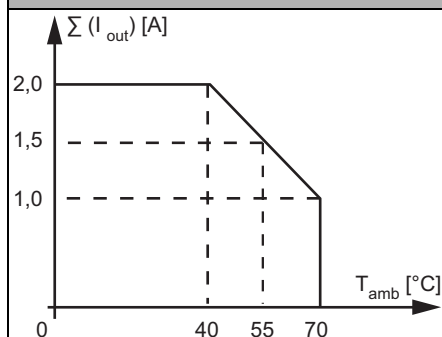

(4) See table "Peripheral fault indication"


(5) BWU3496 from Ident. No. 16960; BWU3540 from Ident. No. 17247; BWU3426 from Ident. No. 17830; BWU2617 from Ident. No. 16955; BWU2684 from Ident. No. 17245; The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.

(6) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada

(7) Protection category IP67 can only be achieved if all open connections are sealed with suitable end caps fulfilling the same protection category.

(8)

BWU2617, BWU2626, BWU2645, BWU2684, BWU2810
Derating total current of outputs

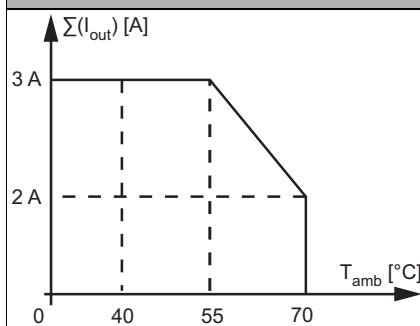


Article No.		BWU3892	BWU2619	BWU2652
General data				
Device type		input / output		output
Connection				
ASi/AUX Connection		profile cable and piercing technology		
Periphery connection		M12, Y-wiring		
Length of connector cable		unlimited ⁽¹⁾		
ASi				
Profile		ASi node 1: S-7.A.7 (ID1=7 fixed), ASi node 2: S-7.A.7 (ID1=6 default)		
Address		2 AB addresses		
Required Master profile		≥M4		
As of ASi specification		3.0		
Operating voltage		30 V (18 ... 31.6 V)		
Max. current consumption		70 mA	270 mA	60 mA
Max. current consumption without sensor/ actuator supply		70 mA		60 mA
AUX				
Operating voltage		24 V (18 ... 30 V)		
Max. current consumption		7 A	6 A	
Input				
Number		8		–
Power supply		out of AUX	out of ASi	–
Sensor supply		short-circuit and overload protected according to EN 61131-2		
Power supply of attached sensors	up to +40 °C	1 A ⁽²⁾	200 mA ⁽⁸⁾	–
	at +55 °C		150 mA ⁽²⁾	–
	at +70 °C	0,5 A	100 mA ⁽²⁾	–
Switching threshold		U<5 V (low) U>15 V (high)		–
Output				
Number		8		
Power supply		out of AUX		
Output		short-circuit and overload protected according to EN 61131-2		
Max. output current	up to +40 °C	1 A per output, Σ(O1...O4) 3 A + Σ (O5-O8)3 A ⁽³⁾		1 A per output, Σ (O1...O4) 3 A + Σ (O5...O8) 3 A ⁽¹⁰⁾
	at +55 °C	1 A per output, Σ(O1...O4) 1,625 A + Σ(O5...O8) 1,625 A ⁽³⁾		
	at +70 °C	0,25 A per output, Σ(O1...O4) 0,25 A + Σ(O5...O8) 0,25 A ⁽³⁾		1 A per output, Σ (O1...O4) 2 A + Σ (O5...O8) 2 A ⁽¹⁰⁾


Article No.	BWU3892	BWU2619	BWU2652
Display			
LED ASI/FLT 1 (red/green)	green: online red: offline yellow/red flashing: address 0		
LED ASI/FLT 2 (red/green)	green: online red: offline yellow/red flashing: address 0 red/green flashing: peripheral fault ⁽⁴⁾ red flashing: ASi node 2 is switched off, because ASi node 1 is offline		
LED AUX (green)	on: 24 V _{DC} AUX off: no 24 V _{DC} AUX		
LEDs I1 / I2 ... In/In+1 (yellow)	state of inputs I1 / I2 ... I7 / I8: at least 1 input of input pair is on	–	
LEDs O1 ... On (yellow / red)	–	yellow: state of outputs O1 ... O8 red: overload	
LEDs O1/O2 ... On / On+1(yellow)	state of outputs O1 / O2 ... O7 / O8: at least 1 output of output pair is on	–	
Environment			
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529		
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	yes ⁽⁵⁾	no ⁽⁹⁾	yes ⁽¹¹⁾
Operating altitude	max. 2000 m		
Ambient temperature	-30 °C ... +55 °C ⁽³⁾ ⁽⁶⁾ ⁽¹⁰⁾ (up to max. +70 °C)		
Storage temperature	-30 °C ... +85 °C		
Housing	plastic, for screw mounting		
Pollution degree	2		
Protection category	IP67 ⁽⁷⁾		
Tolerable loading referring to humidity	according to EN 61131-2		
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2		
Max. tolerable vibration stress	5 ... 8 Hz 50 mm _{pp} /8 ... 500 Hz 6g, acc. EN 61131-2		
Insulation voltage	≥500 V		
Weight	200 g		
Dimensions (W / H / D) in mm	60 / 151 / 31		

(1) Loop resistance ≤150 Ω

(2)

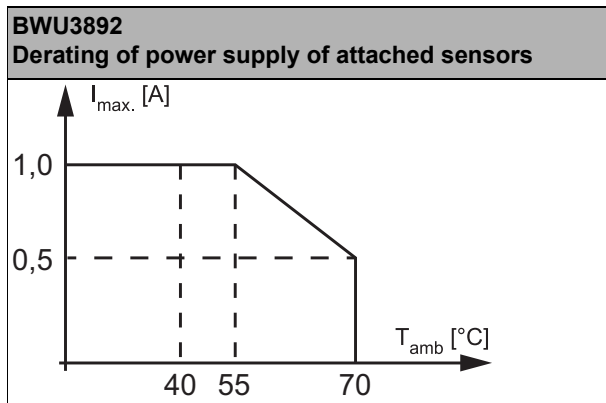

(3)

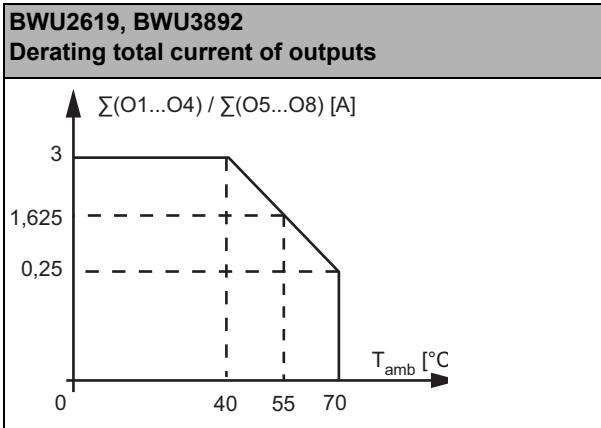


(4) See table "Peripheral fault indication"

(5) BWU3892 from Ident. No. ≥18230; The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.

(6) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada

(7) Protection category IP67 can only be achieved if all open connections are sealed with suitable end caps fulfilling the same protection category.


(8)

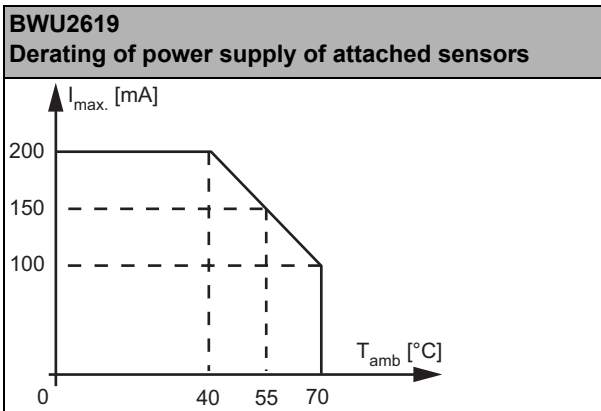

(9) The module is not suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors cannot be assumed for the connection of the two ASi and AUX potentials.

If the module is supplied from an unswitched AUX cable, this has no influence on the safety consideration for the paths with passively safe-switched AUX cable. In an ASi circuit, paths supplied from a passively safe-switched AUX cable and paths supplied from unswitched AUX potential can be used together.

(10)

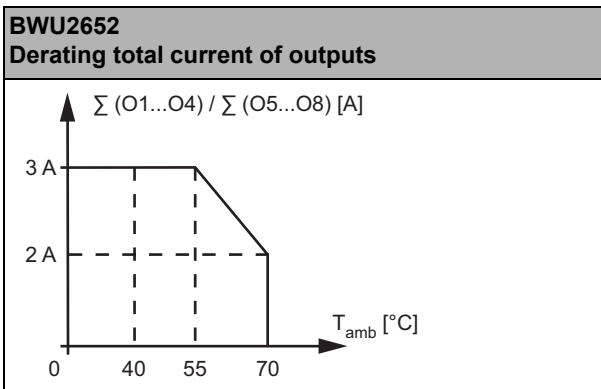

(11) BWU2652 from Ident. No. 18263; The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.


Article No.		BWU3510	BWU2810	BWU2645
General data				
Device type		input / output		
Connection				
ASi/AUX Connection		profile cable and piercing technology		M12 ⁽⁷⁾
Periphery connection		M12, Y-wiring	M12, single-wiring	
Length of connector cable		unlimited ⁽¹⁾		
ASi				
Profile		S-7.A.7 (ID1=7 fixed)		
Address		1 AB address		
Required Master profile		≥M4		
As of ASi specification		3.0		
Operating voltage		30 V (18 ... 31.6 V)		
Max. current consumption		35 mA		
Max. current consumption without sensor/ actuator supply		35 mA		
AUX				
Operating voltage		24 V (18 ... 30 V)		
Max. current consumption		3 A		
Input				
Number		4		
Power supply		out of AUX		
Sensor supply		short-circuit and overload protected according to EN 61131-2		
Power supply of attached sensors	up to +40 °C	max. 1 A		
	at +55 °C			
	at +70 °C			
Switching threshold		U<5 V (low) U>15 V (high)		
Output				
Number		4		
Power supply		out of AUX		
Output		short-circuit and overload protected according to EN 61131		
Max. output current	up to +40 °C	1 A per output, Σ(Out) 3 A ⁽²⁾		
	at +55 °C			
	at +70 °C	1 A per output, Σ(Out) 2 A ⁽³⁾		
Display				
LED ASi (green)		on: ASi voltage on flashing: ASi voltage on, but peripheral fault ⁽³⁾ or address 0 off: no ASi voltage		
LED FLT/FAULT (red)		on: address 0 or offline flashing: peripheral fault ⁽⁴⁾ off: online		
LED AUX (green)		on: 24 V _{DC} AUX off: no 24 V _{DC} AUX		
LEDs I1 ... In (yellow)		state of inputs I1 ... I4		
LEDs O1 ... On (yellow / red)		yellow: state of outputs O1 ... O4 red: overload		

Article No.	BWU3510	BWU2810	BWU2645
Environment			
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529		
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	yes ⁽⁴⁾		no ⁽⁸⁾
Operating altitude	max. 2000 m		
Ambient temperature	-30 °C ... +55 °C ^{(2) (5)} (up to max. +70 °C)		
Storage temperature	-30 °C ... +85 °C		
Housing	plastic, for screw mounting		
Pollution degree	2		
Protection category	IP67 ⁽⁶⁾		
Tolerable loading referring to humidity	according to EN 61131-2		
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2		
Max. tolerable vibration stress	5 ... 8 Hz 50 mm _{pp} /8 ... 500 Hz 6g, acc. EN 61131-2		
Insulation voltage	≥500 V		
Weight	200 g		
Dimensions (W / H / D) in mm	60 / 151 / 31		60 / 152 / 46

(1) Loop resistance ≤150 Ω

(2)

BWU2645, BWU2810, BWU3510 Derating total current of outputs

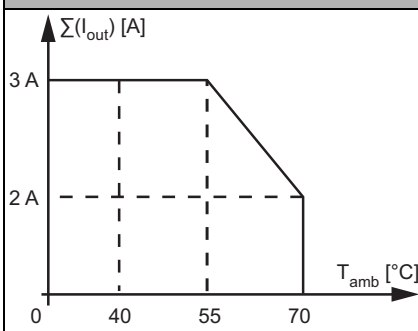

(3) See table "Peripheral fault indication"

(4) BWU3510 from Ident. No. 18000; BWU2810 from Ident. No. 17248; BWU2645 from Ident. No. 17249; The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.


(5) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada

(6) Protection category IP67 can only be achieved if all open connections are sealed with suitable end caps fulfilling the same protection category.


(7) **Line protection:**

If the module is supplied via a M12 connection with A or B coding, it may only be used with a current load of max. 4 A per pin in acc. with IEC 61076-2-101 and IEC 61076-2-109. A fused tap is recommended. There is no such limitation for modules supplied via piercing contacts.

Connection to ASi and AUX via M12

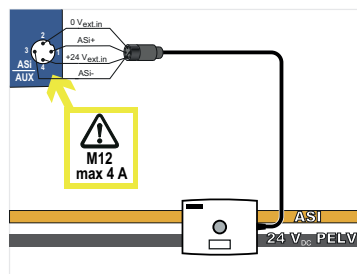

via piercing contacts

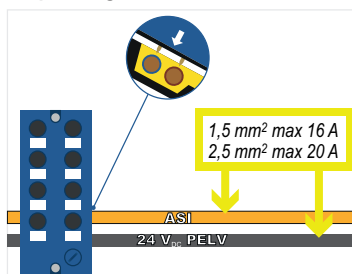

- (8) The module is not suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors cannot be assumed for the connection of the two ASi and AUX potentials.
If the module is supplied from an unswitched AUX cable, this has no influence on the safety consideration for the paths with passively safe-switched AUX cable. In an ASi circuit, paths supplied from a passively safe-switched AUX cable and paths supplied from unswitched AUX potential can be used together.


Article No.		BWU2713	BWU2594	BWU2728
General data				
Device type		output		
Connection				
ASi/AUX Connection		profile cable and piercing technology		
Periphery connection		M12, Y-wiring		
Length of connector cable		unlimited ⁽¹⁾		
ASi				
Profile		S-7.F.E (ID1=F default)	S-7.A.7 (ID1=7 fixed)	
Address		1 single address	1 AB address	
Required Master profile		≥M0	≥M4	
As of ASi specification		2	3	
Operating voltage		30 V (18 ... 31.6 V)		
Max. current consumption		35 mA		
Max. current consumption without sensor/ actuator supply		35 mA		
AUX				
Operating voltage		24 V (18 ... 30 V)		
Max. current consumption		3 A		8 A
Output				
Number		4		
Power supply		out of AUX		
Output		short-circuit and overload protected according to EN 61131		
Max. output current	up to +40 °C	1 A per output Σ (Out) 3 A ⁽²⁾		2 A per output, Σ (Out) 8 A ⁽⁹⁾ ⁽¹⁰⁾
	at +55 °C			2 A per output, Σ (Out) 4 A ⁽⁹⁾ ⁽¹⁰⁾
	at +70 °C	1 A per output Σ (Out) 2 A ⁽²⁾	—	

Article No.	BWU2713		BWU2594	BWU2728
Display				
LED ASI (green)	on: ASI voltage on flashing: ASI voltage on, but peripheral fault ⁽³⁾ or address 0 off: no ASI voltage			
LED FLT/FAULT (red)	on: address 0 or offline flashing: peripheral fault ⁽³⁾ off: online			
LED AUX (green)	on: 24 V _{DC} AUX off: no 24 V _{DC} AUX			
LEDs O1 ... On (yellow /red)	yellow: state of outputs O1 ... O4 red: overload			
Environment				
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529			
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	yes ⁽⁴⁾	yes ⁽⁸⁾		yes ⁽¹¹⁾
Operating altitude	max. 2000 m			
Ambient temperature	-30 °C ... +55 °C (up to max. +70 °C) ⁽²⁾ ⁽⁵⁾ ⁽⁹⁾			
Storage temperature	-30 °C ... +85 °C			
Housing	plastic, for DIN rail mounting or for screw mounting ⁽⁶⁾			
Pollution degree	2			
Protection category	IP67 ⁽⁷⁾			
Tolerable loading referring to humidity	according to EN 61131-2			
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2			
Max. tolerable vibration stress	5 ... 8 Hz 50 mm _{pp} /8 ... 500 Hz 6g, acc. EN 61131-2			
Insulation voltage	≥500 V			
Weight	100 g			
Dimensions (W / H / D) in mm	45 / 80 / 42			

(1) Loop resistance ≤150 Ω

(2)

**BWU2594, BWU2713,
Derating total current of outputs**

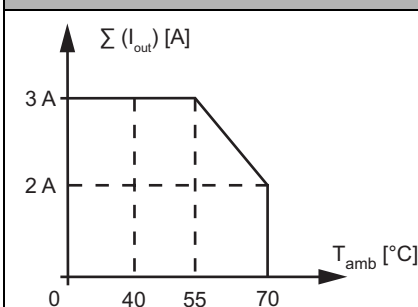

(3) See table "Peripheral fault indication"

(4) BWU2713 from ID no. 18595; The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.

(5) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada.

(6) Depending on substructure module (see accessories). The substructure module is not included in the scope of delivery.


(7) Protection category IP67 can only be achieved if all open connections are sealed with suitable end caps fulfilling the same protection category.

(8) BWU2594 from ID no. 18600; The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.

(9)

BWU2728


Derating total current of outputs

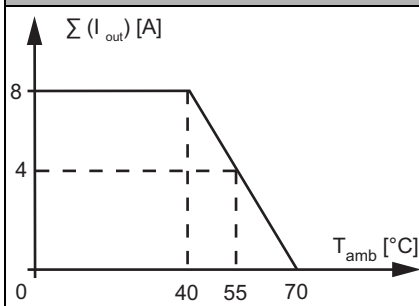

(10) To power consumers whose current draw is greater than 2A, two or more outputs can be combined with each other. The data bits of the bundled outputs must be set at the same time.

(11) BWU2728 from Ident. No. 17399; The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.

Dimensional drawings

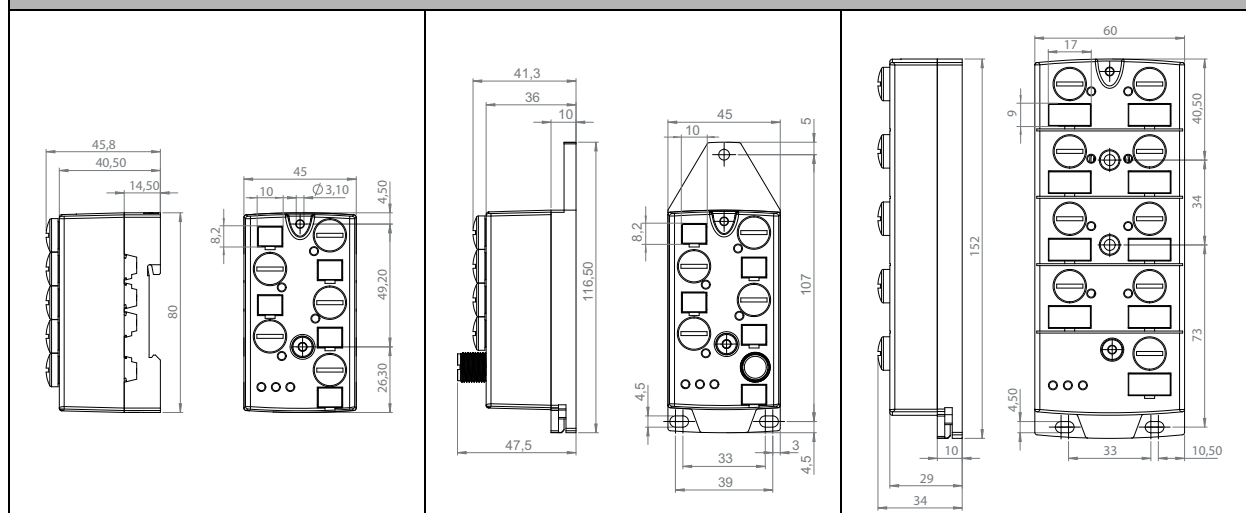

UL-specifications (UL508)

BWU2547, BWU2552, BWU2594, BWU2617, BWU2619, BWU2620, BWU2626, BWU3426, BWU2645, BWU2651, BWU2652, BWU2684, BWU2713, BWU2725, BWU2728, BWU2767, BWU2770, BWU2810, BWU2983, BWU3032, BWU3077, BWU3141, BWU3240, BWU3375, BWU3539, BWU3456, BWU3457, BWU3496, BWU3510, BWU3517, BWU3540, BWU3556, BWU3775, BWU3887, BWU3892

External protection	An isolated source with a secondary open circuit voltage of $\leq 30 V_{DC}$ with a 3 A maximum over current protection. Over current protection is not required when a Class 2 source is employed.
In general	UL mark does not provide UL certification for any functional safety rating or aspects of the above devices.

Article no.	Peripheral fault indication		
	Overload sensor supply	Output short circuited	AUX voltage missing
BWU2487	•	–	–
BWU2547	–	–	•
BWU2552	•	–	–
BWU2594	•	•	•
BWU2617	•	•	–
BWU2619	•	•	–
BWU2620	•	–	–
BWU2626	•	•	–
BWU3426	•	–	–
BWU2645	•	•	–
BWU2651	•	–	–
BWU2652	•	•	•
BWU2684	•	•	–
BWU2713	•	•	•
BWU2725	•	–	•
BWU2728	•	•	•
BWU2767	•	–	•
BWU2770	•	–	•
BWU2810	•	•	–
BWU2983	•	–	–
BWU3032	•	–	–
BWU3077	•	–	–
BWU3141	•	•	•
BWU3240	•	–	–
BWU3375	•	–	–
BWU3539	•	•	–
BWU3456	•	•	•
BWU3457	•	–	–
BWU3496	•	–	–
BWU3510	•	•	–
BWU3517	•	•	•
BWU3540	•	–	–
BWU3556	•	–	–
BWU3775	•	•	–
BWU3887	–	–	•
BWU3892	•	•	–


Programming	ASi bit assignment			
Bit	D3	D2	D1	D0
	input			
BWU2487 / BWU2547 / BWU2552 / BWU2617 / BWU2620 / BWU2626 / BWU3426 / BWU2645 / BWU2684 / BWU2725 / BWU2767 / BWU2810 / BWU3032 / BWU3077 / BWU3240 / BWU3375 / BWU3496 / BWU3510 / BWU3556 / BWU3540 / BWU3457 / BWU3887	I4	I3	I2	I1
BWU3141, BWU3456, BWU3539, BWU3517, BWU3775	–	–	I2	I1
BWU2619 / BWU2651 / BWU2770 / BWU2983 / BWU3892	ASi node 1: I4	ASi node 1: I3	ASi node 1: I2	ASi node 1: I1
	ASi node 2: I8	ASi node 2: I7	ASi node 2: I6	ASi node 2: I5
	output			
BWU2487 / BWU2547 / BWU2594 / BWU2617 / BWU2626 / BWU3426 / BWU2645 / BWU2684 / BWU2713 / BWU2728 / BWU2810 / BWU3032 / BWU3240 / BWU3510 / BWU3540 / BWU3887	O4	O3	O2	O1
BWU2767 / BWU3141 / BWU3456 / BWU3517	–	–	O2	O1
BWU3539 / BWU3775	O4	O3	–	–
BWU3375 / BWU3496	–	O3	O2	O1
BWU2619 / BWU2652 / BWU3892	ASi node 1: O4	ASi node 1: O3	ASi node 1: O2	ASi node 1: O1
	ASi node 2: O8	ASi node 2: O7	ASi node 2: O6	ASi node 2: O5

Programming	Parameter bits				
Bit	P3	P2	P1	P0	
BWU2652	not used	0= on / 1= off (synchronous I/O mode)	—	not used, Watchdog always on	
BWU2594 / BWU2713			0= off / 1= on (peripheral fault, if AUX missing)	0= off / 1= on (Watchdog)	
BWU2728					
BWU2487 / BWU2547 / BWU2617 / BWU2626 / BWU3426 / BWU2645 / BWU2684 / BWU2767 / BWU2810 / BWU3032 / BWU3141 / BWU3240 / BWU3375 / BWU3456 / BWU3539 / BWU3496 / BWU3510 / BWU3517 / BWU3540 / BWU3775 / BWU3887			0= on / 1= off (data input filter 128µs)		
BWU2552 / BWU2620 / BWU2651 / BWU2725 / BWU2770 / BWU2983 / BWU3077 / BWU3457 BWU3556					0= off / 1= on (peripheral fault)
BWU2619 / BWU3892					not used, Watchdog always on



Pin assignment

Signal name	Explanation
Ix	digital input x
Ox	digital output x
24V _{ext out}	power supply, out of external voltage, positive pole (AUX, actuator supply)
0V _{ext out}	power supply, out of external voltage, negative pole (AUX, actuator supply)
24V _{out of ASi}	power supply, out of ASi, positive pole (sensor supply)
0V _{out of ASi}	power supply, out of ASi, negative pole (sensor supply)
ASi +, ASi -	connection to ASi bus
n.c. (not connected)	not connected

Connections							
Article no.	M12 connection	Marking	Pin1	Pin2	Pin3	Pin4	Pin5
BWU3141	X1	I1	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I1	n.c.
	X2	O1	24 V _{ext out}	n.c.	0 V _{ext out}	O1	n.c.
	X3	I2	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I2	n.c.
	X4	O2	24 V _{ext out}	n.c.	0 V _{ext out}	O2	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					
BWU3456	X1	I1	24 V _{out of ASi}	I2	0 V _{out of ASi}	I1	n.c.
	X2	O1	24 V _{ext out}	O2	0 V _{ext out}	O1	n.c.
	X3	I2	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I2	n.c.
	X4	O2	24 V _{ext out}	n.c.	0 V _{ext out}	O2	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					
BWU3539 BWU3775	X1	I1	24 V _{out of ASi}	I2	0 V _{out of ASi}	I1	n.c.
	X2	O3	24 V _{ext out}	O4	0 V _{ext out}	O3	n.c.
	X3	I2	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I2	n.c.
	X4	O4	24 V _{ext out}	n.c.	0 V _{ext out}	O4	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					
BWU2487	X1	I1/I2	24 V _{out of ASi}	I2	0 V _{out of ASi}	I1	n.c.
	X2	O1/O2	24 V _{ext out}	O2	0 V _{ext out}	O1	n.c.
	X3	I3/I4	24 V _{out of ASi}	I4	0 V _{out of ASi}	I3	n.c.
	X4	O3/O4	24 V _{ext out}	O4	0 V _{ext out}	O3	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					
BWU3032	X1	I1/I2	24 V _{ext out}	I2	0 V _{ext out}	I1	n.c.
	X2	O1/O2	24 V _{ext out}	O2	0 V _{ext out}	O1	n.c.
	X3	I3/I4	24 V _{ext out}	I4	0 V _{ext out}	I3	n.c.
	X4	O3/O4	24 V _{ext out}	O4	0 V _{ext out}	O3	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					
BWU3375	X1	I1/I2	24 V _{out of ASi}	I2	0 V _{out of ASi}	I1	n.c.
	X2	O1/O2	24 V _{ext out}	O2	0 V _{ext out}	O1	n.c.
	X3	I3/I4	24 V _{out of ASi}	I4	0 V _{out of ASi}	I3	n.c.
	X4	O3	24 V _{ext out}	n.c.	0 V _{ext out}	O3	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					

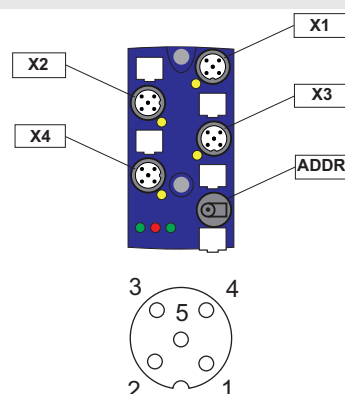


Connections							
Article no.	M12 connection	Marking	Pin1	Pin2	Pin3	Pin4	Pin5
BWU2547	X1	I1/O1	24 V _{ext out}	O1	0 V _{ext out}	I1	n.c.
	X2	I2/O2	24 V _{ext out}	O2	0 V _{ext out}	I2	n.c.
	X3	I3/O3	24 V _{ext out}	O3	0 V _{ext out}	I3	n.c.
	X4	I4/O4	24 V _{ext out}	O4	0 V _{ext out}	I4	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					
BWU3887	X1	I1/O1	24 V _{ext out}	I1	0 V _{ext out}	O1	n.c.
	X2	I2/O2	24 V _{ext out}	I2	0 V _{ext out}	O2	n.c.
	X3	I3/O3	24 V _{ext out}	I3	0 V _{ext out}	O3	n.c.
	X4	I4/O4	24 V _{ext out}	I4	0 V _{ext out}	O4	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					
BWU2767	X1	I1/O1	24 V _{ext out}	O1	0 V _{ext out}	I1	n.c.
	X2	I2/O2	24 V _{ext out}	O2	0 V _{ext out}	I2	n.c.
	X3	I3	24 V _{ext out}	n.c.	0 V _{ext out}	I3	n.c.
	X4	I4	24 V _{ext out}	n.c.	0 V _{ext out}	I4	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					
BWU2594 BWU2713 BWU2728	X1	O1	0 V _{ext out}	O2	0 V _{ext out}	O1	n.c.
	X2	O2	0 V _{ext out}	n.c.	0 V _{ext out}	O2	n.c.
	X3	O3	0 V _{ext out}	O4	0 V _{ext out}	O3	n.c.
	X4	O4	0 V _{ext out}	n.c.	0 V _{ext out}	O4	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					
BWU2552	X1	I1	24 V _{out of ASi}	I2	0 V _{out of ASi}	I1	n.c.
	X2	I2	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I2	n.c.
	X3	I3	24 V _{out of ASi}	I4	0 V _{out of ASi}	I3	n.c.
	X4	I4	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I4	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					
BWU2620 BWU3556	X1	I1	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I1	n.c.
	X2	I2	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I2	n.c.
	X3	I3	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I3	n.c.
	X4	I4	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I4	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					
BWU3457	X1	I1	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I1	n.c.
	X2	I2	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I2	n.c.
	X3	I3	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I3	n.c.
	X4	I4	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I4	n.c.
	X5	ASi	ASi+	n.c.	ASi-	n.c.	—
BWU2725	X1	I1	24 V _{ext out}	n.c.	0 V _{ext out}	I1	n.c.
	X2	I2	24 V _{ext out}	n.c.	0 V _{ext out}	I2	n.c.
	X3	I3	24 V _{ext out}	n.c.	0 V _{ext out}	I3	n.c.
	X4	I4	24 V _{ext out}	n.c.	0 V _{ext out}	I4	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					
BWU3077	X1	I1	24 V _{out of ASi}	I2	0 V _{out of ASi}	I1	n.c.
	X2	I2	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I2	n.c.
	X3	I3	24 V _{out of ASi}	I4	0 V _{out of ASi}	I3	n.c.
	X4	I4	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I4	n.c.
	X5	ASi	ASi+	n.c.	ASi-	n.c.	—

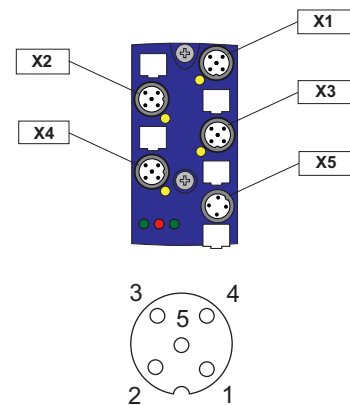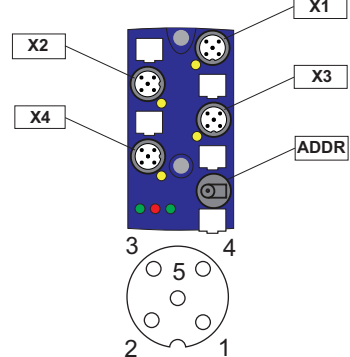


Connections

Article no.	M12 connection	Marking	Pin1	Pin2	Pin3	Pin4	Pin5
BWU3240	X1	I1/O1	24 V _{out} of ASi	O1	0 V _{out} of ASi	I1	n.c.
	X2	I2/O2	24 V _{out} of ASi	O2	0 V _{out} of ASi	I2	n.c.
	X3	I3/O3	24 V _{out} of ASi	O3	0 V _{out} of ASi	I3	n.c.
	X4	I4/O4	24 V _{out} of ASi	O4	0 V _{out} of ASi	I4	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					
BWU3517	X1	I1	24 V _{out} of ASi	n.c.	0 V _{out} of ASi	I1	n.c.
	X2	O1	24 V _{ext} out	n.c.	0 V _{ext} out	O1	n.c.
	X3	I2	24 V _{out} of ASi	n.c.	0 V _{out} of ASi	I2	n.c.
	X4	O2	24 V _{ext} out	n.c.	0 V _{ext} out	O2	n.c.
	X5	ASi	ASi+	0 V _{ext} in	ASi-	24 V _{ext} in	–

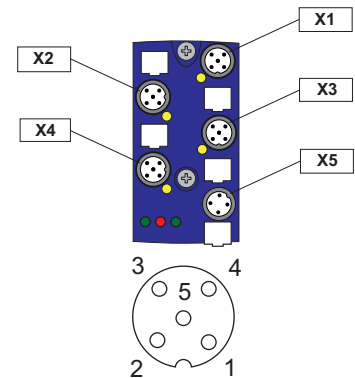


Connections


Article no.	M12 connection	Marking	Pin1	Pin2	Pin3	Pin4	Pin5
BWU2617 BWU2684	X1	I1	24 V _{out} of ASi	n.c.	0 V _{out} of ASi	I1	n.c.
	X2	I2	24 V _{out} of ASi	n.c.	0 V _{out} of ASi	I2	n.c.
	X3	I3	24 V _{out} of ASi	n.c.	0 V _{out} of ASi	I3	n.c.
	X4	I4	24 V _{out} of ASi	n.c.	0 V _{out} of ASi	I4	n.c.
	X5	O1	0 V _{ext} out	n.c.	0 V _{ext} out	O1	n.c.
	X6	O2	0 V _{ext} out	n.c.	0 V _{ext} out	O2	n.c.
	X7	O3	0 V _{ext} out	n.c.	0 V _{ext} out	O3	n.c.
	X8	O4	0 V _{ext} out	n.c.	0 V _{ext} out	O4	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					
BWU2619	X1	I1/I2	24 V _{out} of ASi	I2	0 V _{out} of ASi	I1	n.c.
	X2	I3/I4	24 V _{out} of ASi	I4	0 V _{out} of ASi	I3	n.c.
	X3	I5/I6	24 V _{out} of ASi	I6	0 V _{out} of ASi	I5	n.c.
	X4	I7/I8	24 V _{out} of ASi	I8	0 V _{out} of ASi	I7	n.c.
	X5	O1/O2	0 V _{ext} out	O2	0 V _{ext} out	O1	n.c.
	X6	O3/O4	0 V _{ext} out	O4	0 V _{ext} out	O3	n.c.
	X7	O5/O6	0 V _{ext} out	O6	0 V _{ext} out	O5	n.c.
	X8	O7/O8	0 V _{ext} out	O8	0 V _{ext} out	O7	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					
BWU2626 BWU3426	X1	I1	24 V _{out} of ASi	I2	0 V _{out} of ASi	I1	n.c.
	X2	I2	24 V _{out} of ASi	n.c.	0 V _{out} of ASi	I2	n.c.
	X3	I3	24 V _{out} of ASi	I4	0 V _{out} of ASi	I3	n.c.
	X4	I4	24 V _{out} of ASi	n.c.	0 V _{out} of ASi	I4	n.c.
	X5	O1	0 V _{ext} out	O2	0 V _{ext} out	O1	n.c.
	X6	O2	0 V _{ext} out	n.c.	0 V _{ext} out	O2	n.c.
	X7	O3	0 V _{ext} out	O4	0 V _{ext} out	O3	n.c.
	X8	O4	0 V _{ext} out	n.c.	0 V _{ext} out	O4	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					

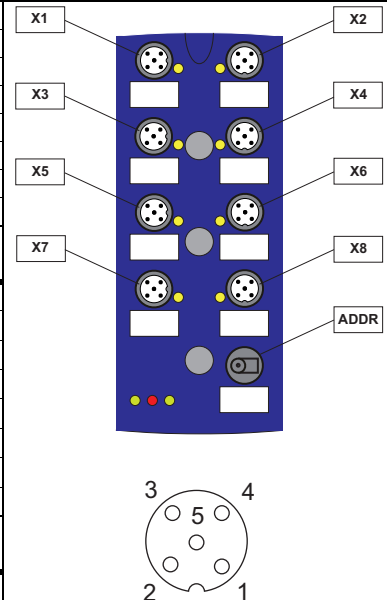


Connections							
Article no.	M12 connection	Marking	Pin1	Pin2	Pin3	Pin4	Pin5
BWU3496	X1	I1	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I1	n.c.
	X2	I2	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I2	n.c.
	X3	I3	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I3	n.c.
	X4	I4	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I4	n.c.
	X5	O1	0 V _{ext out}	n.c.	0 V _{ext out}	O1	n.c.
	X6	O2	0 V _{ext out}	n.c.	0 V _{ext out}	O2	n.c.
	X7	O3	0 V _{ext out}	n.c.	0 V _{ext out}	O3	n.c.
	X8	not used					
	ADDR (protection cap)	connection for ASi-3 addressing plug					
BWU3540	X1	I1	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I1	n.c.
	X2	I2	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I2	n.c.
	X3	I3	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I3	n.c.
	X4	I4	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I4	n.c.
	X5	O1	0 V _{ext out}	n.c.	0 V _{ext out}	O1	n.c.
	X6	O2	0 V _{ext out}	n.c.	0 V _{ext out}	O2	n.c.
	X7	O3	0 V _{ext out}	n.c.	0 V _{ext out}	O3	n.c.
	X8	O4	0 V _{ext out}	n.c.	0 V _{ext out}	O4	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					
BWU3892	X1	I1/I2	24 V _{ext out}	I2	0 V _{ext out}	I1	n.c.
	X2	I3/I4	24 V _{ext out}	I4	0 V _{ext out}	I3	n.c.
	X3	I5/I6	24 V _{ext out}	I6	0 V _{ext out}	I5	n.c.
	X4	I7/I8	24 V _{ext out}	I8	0 V _{ext out}	I7	n.c.
	X5	O1/O2	0 V _{ext out}	O2	0 V _{ext out}	O1	n.c.
	X6	O3/O4	0 V _{ext out}	O4	0 V _{ext out}	O3	n.c.
	X7	O5/O6	0 V _{ext out}	O6	0 V _{ext out}	O5	n.c.
	X8	O7/O8	0 V _{ext out}	O8	0 V _{ext out}	O7	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					
BWU2651	X1	I1	24 V _{out of ASi}	I2	0 V _{out of ASi}	I1	n.c.
	X2	I2	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I2	n.c.
	X3	I3	24 V _{out of ASi}	I4	0 V _{out of ASi}	I3	n.c.
	X4	I4	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I4	n.c.
	X5	I5	24 V _{out of ASi}	I6	0 V _{out of ASi}	I5	n.c.
	X6	I6	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I6	n.c.
	X7	I7	24 V _{out of ASi}	I8	0 V _{out of ASi}	I7	n.c.
	X8	I8	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I8	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					
BWU2983	X1	I1	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I1	n.c.
	X2	I2	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I2	n.c.
	X3	I3	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I3	n.c.
	X4	I4	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I4	n.c.
	X5	I5	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I5	n.c.
	X6	I6	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I6	n.c.
	X7	I7	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I7	n.c.
	X8	I8	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I8	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					
BWU2652	X1	O1	0 V _{ext out}	O2	0 V _{ext out}	O1	n.c.
	X2	O2	0 V _{ext out}	n.c.	0 V _{ext out}	O2	n.c.
	X3	O3	0 V _{ext out}	O4	0 V _{ext out}	O3	n.c.
	X4	O4	0 V _{ext out}	n.c.	0 V _{ext out}	O4	n.c.
	X5	O5	0 V _{ext out}	O6	0 V _{ext out}	O5	n.c.
	X6	O6	0 V _{ext out}	n.c.	0 V _{ext out}	O6	n.c.
	X7	O7	0 V _{ext out}	O8	0 V _{ext out}	O7	n.c.
	X8	O8	0 V _{ext out}	n.c.	0 V _{ext out}	O8	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					

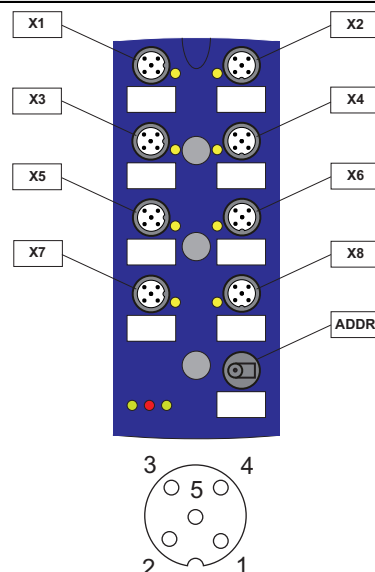


Connections

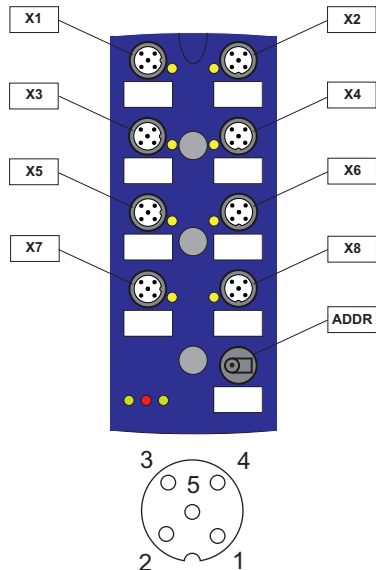Article no.	M12 connection	Marking	Pin1	Pin2	Pin3	Pin4	Pin5	
BWU2770	X1	I1	24 V _{ext out}	I2	0 V _{ext out}	I1	n.c.	
	X2	I2	24 V _{ext out}	n.c.	0 V _{ext out}	I2	n.c.	
	X3	I3	24 V _{ext out}	I4	0 V _{ext out}	I3	n.c.	
	X4	I4	24 V _{ext out}	n.c.	0 V _{ext out}	I4	n.c.	
	X5	I5	24 V _{ext out}	I6	0 V _{ext out}	I5	n.c.	
	X6	I6	24 V _{ext out}	n.c.	0 V _{ext out}	I6	n.c.	
	X7	I7	24 V _{ext out}	I8	0 V _{ext out}	I7	n.c.	
	X8	I8	24 V _{ext out}	n.c.	0 V _{ext out}	I8	n.c.	
	ADDR (protection cap)	connection for ASi-3 addressing plug						
BWU2810	X1	I1	24 V _{ext out}	n.c.	0 V _{ext out}	I1	n.c.	
	X2	I2	24 V _{ext out}	n.c.	0 V _{ext out}	I2	n.c.	
	X3	I3	24 V _{ext out}	n.c.	0 V _{ext out}	I3	n.c.	
	X4	I4	24 V _{ext out}	n.c.	0 V _{ext out}	I4	n.c.	
	X5	O1	0 V _{ext out}	n.c.	0 V _{ext out}	O1	n.c.	
	X6	O2	0 V _{ext out}	n.c.	0 V _{ext out}	O2	n.c.	
	X7	O3	0 V _{ext out}	n.c.	0 V _{ext out}	O3	n.c.	
	X8	O4	0 V _{ext out}	n.c.	0 V _{ext out}	O4	n.c.	
	ADDR (protection cap)	connection for ASi-3 addressing plug						
BWU3510	X1	I1	24 V _{ext out}	I2	0 V _{ext out}	I1	n.c.	
	X2	I2	24 V _{ext out}	n.c.	0 V _{ext out}	I2	n.c.	
	X3	I3	24 V _{ext out}	I4	0 V _{ext out}	I3	n.c.	
	X4	I4	24 V _{ext out}	n.c.	0 V _{ext out}	I4	n.c.	
	X5	O1	n.c.	O2	0 V _{ext out}	O1	n.c.	
	X6	O2	n.c.	n.c.	0 V _{ext out}	O2	n.c.	
	X7	O3	n.c.	O4	0 V _{ext out}	O3	n.c.	
	X8	O4	n.c.	n.c.	0 V _{ext out}	O4	n.c.	
	ADDR (protection cap)	connection for ASi-3 addressing plug						


Connections

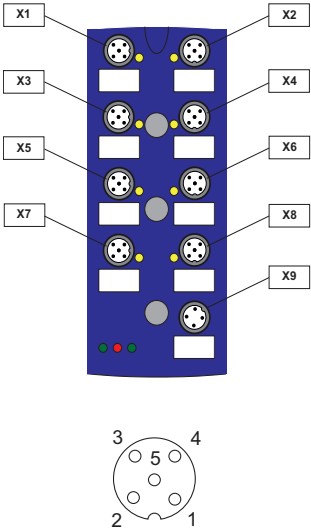Article no.	M12 connection	Marking	Pin1	Pin2	Pin3	Pin4	Pin5	
BWU2645	X1	I1	24 V _{ext out}	n.c.	0 V _{ext out}	I1	n.c.	
	X2	I2	24 V _{ext out}	n.c.	0 V _{ext out}	I2	n.c.	
	X3	I3	24 V _{ext out}	n.c.	0 V _{ext out}	I3	n.c.	
	X4	I4	24 V _{ext out}	n.c.	0 V _{ext out}	I4	n.c.	
	X5	O1	0 V _{ext out}	n.c.	0 V _{ext out}	O1	n.c.	
	X6	O2	0 V _{ext out}	n.c.	0 V _{ext out}	O2	n.c.	
	X7	O3	0 V _{ext out}	n.c.	0 V _{ext out}	O3	n.c.	
	X8	O4	0 V _{ext out}	n.c.	0 V _{ext out}	O4	n.c.	
	X9	ASi	ASi+	0 V _{ext in}	ASi-	24 V _{ext in}	—	

Mounting according to cable direction


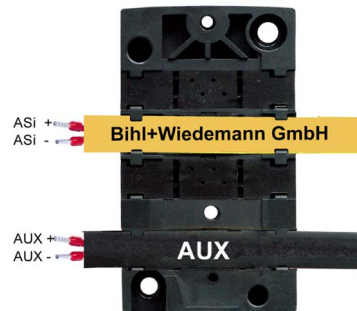


ordinary

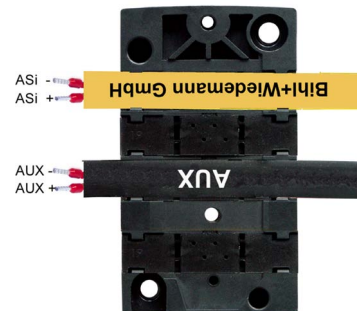

turned

Line termination with sealing profiles / as junction

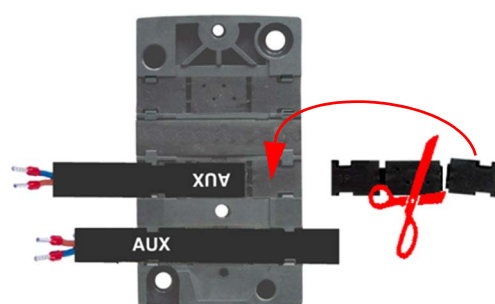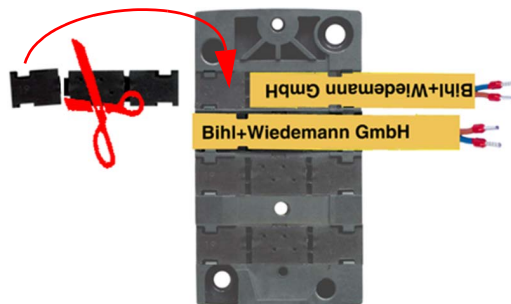

Accessories:

- ASi substructure module for 4 channel module in 45 mm housing (art. no. BWU2349)
- ASi substructure module (CNOMO) for 4 channel module in 45 mm housing (art. no. BWU2350)
- ASi substructure module (CNOMO) for 8 channel module in 60 mm housing (art. no. BWU2351)
- Universal protection cap ASi-5/ASi-3 for M12 sockets, IP67 (art. no. BW4056)
- Sealing profile IP67 (IDC plug), 60 mm (art. no. BW3282)
- Sealing profile IP67 (IDC plug), 45 mm (art. no. BW3283)
- Passive Distributor ASi/AUX to 1 x M12 cable socket, straight, 5 poles, depth 19 mm, IP67 (art. no. BW3911)
- Passive Distributor ASi/AUX to 1 x M12 cable socket, angled, 5 poles, depth 19 mm, IP67 (art. no. BWU3408)
- ASi-5/ASi-3 Address Programming Device (art. no. BW4925)
- It is recommended to use pre-assembled cables to connect the power source with the module.

Accessories for BWU3077, BWU3457, BWU3517:

- ASi substructure module for 4 channel module in 45 mm housing (art. no. BWU2349)
- ASi substructure module (CNOMO) for 4 channel module in 45 mm housing (art. no. BWU2350)
- ASi substructure module (CNOMO) for 8 channel module in 60 mm housing (art. no. BWU2351)
- Universal protection cap ASi-5/ASi-3 for M12 sockets, IP67 (art. no. BW4056)
- Sealing profile IP67 (IDC plug), 60 mm (art. no. BW3282)
- Sealing profile IP67 (IDC plug), 45 mm (art. no. BW3283)
- Passive Distributor ASi to 1 x M12 cable socket, angled, 5 poles, depth 19 mm, IP67 (art. no. BWU3185)
- Passive Distributor ASi to 1 x M12 cable socket, straight, 5 poles, depth 19 mm, IP67 (art. no. BWU3247)
- ASi-5/ASi-3 Address Programming Device (art. no. BW4925)
- It is recommended to use pre-assembled cables to connect the power source with the module.