

product data sheet

item no. R1.188.0530.1

two-hand control relay SNZ4052K-A AC/DC 24V (B)

Base unit EN 13851 type IIIC, two-channel control, 2x N.C./N.O. startup inhibit circuit, synchronous time monitoring, 2 enabling current path, 1 signaling output, AC/DC 24 V 50-60Hz, screw-terminals pluggable



item no.	R1.188.0530.1
EAN	4015573808515
order unit	1 piece(s)

certificates / approvals



technical data

general

function display	3 LED, green
creepage distances and clearances between the circuits	EN 60664-1
protection degree according to DIN EN 60529 (housing)	IP40
protection degree according to DIN EN 60529 (terminals)	IP20
ambient temperature min.	-25 °C
ambient temperature max.	55 °C
wire ranges screw terminals, fine-stranded / solid	1 x 0.2 mm ² - 2.5 mm ² / 2 x 0.2 mm ² - 1.0 mm ²
wire ranges screw terminals, fine-stranded with ferrules	1 x 0.25 mm ² - 2.5 mm ² / 2 x 0.25 mm ² - 1.0 mm ²
permissible torque min.	0.5 Nm
permissible torque max.	0.6 Nm
tightening moment	0.6 Nm
weight	0.2 kg
standards	EN ISO 13849-1EN 62061EN 13851
suitable for safety functions	yes
with muting function	no
feedback circuit	yes
start contact	no
stop category acc. to IEC 60204	0
rail mounting possible	yes
applicable in accordance with EN 574	type III C

connection data

detachable clamps	yes
type of electric connection	screw connection

application

model	basic device
suitable for monitoring of magnetic switches	no

output circuit

enabling paths	normally open contact
signaling paths	opener
contact material	Ag alloy, gold-plated
rated switching voltage, enabling paths AC	230 V
rated switching voltage, enabling paths DC	24 V
rated switching voltage, signaling paths AC	230 V
rated switching voltage, signaling paths DC	24 V
max. thermal current I _{th} , enabling paths	6 A
max. thermal current I _{th} , signaling paths	2 A
max. total current I ² of all current path	9 A ²
application category AC-15 (NO)	Ue 230V, Ie 3A
application category DC-13 (NO)	Ue 24V, Ie 2.5A
short-circuit protection (NO), max. fuse insert	6 A class gG fuse, fuse integral < 100 A ² s
mechanical life	10 ⁷ switching cycles
outputs, signalling function, undelayed, with contact	1
outputs, signalling function, delayed, with contact	0
outputs, safe, undelayed, with contact	2
outputs, safe, delayed, with contact	0

control circuit

nominal output voltage DC	24 V
input current (safety circuit / reset circuit)	60 mA
max. peak current (safety circuit / reset circuit)	1000 mA
response time tA1	40 ms
response time tA2	40 ms
min. switch-on time	40 ms
recovery time tW	> 250 ms
release time tR	< 50 ms
synchronous time tS	# 500 ms
max. resistivity, per channel	# (5 + (1.333 x U _B / U _N - 1) x 200) #
type of switch function of the inputs	NC/NO
evaluation inputs	2-channel

supply circuit

nominal voltage U _N	AC/DC 24 V
rated consumption DC	2.4 W
rated frequency min.	50 Hz
rated frequency max.	60 Hz
electrical isolation supply circuit - control circuit	no
min. rated control supply voltage at AC 50 Hz	20.4 V
max. rated AC voltage for controls, 50 Hz	26.4 V
min. rated DC voltage for controls	20.4 V
max. rated DC voltage for controls	26.4 V
min. rated control supply voltage at DC	20.4 V
rated control supply voltage at AC 60HZ	20.4 V
rated control supply voltage at AC 50HZ	26.4 V

dimensions

depth	114 mm
width	22.5 mm
height	96.5 mm

Qu - PEE 12/92

Teile Nr. / Part No.
R1.188.0460.0
R1.188.0470.0
R1.188.0480.0
R1.188.0490.0
R1.188.0500.1
R1.188.0530.1
R1.188.0590.0
R1.188.0620.0
R1.188.0640.0
R1.188.0660.0
R1.188.0680.0
R1.188.0700.2
R1.188.0720.2
R1.188.0900.1
R1.188.0910.1
R1.188.0940.1
R1.188.0950.1
R1.188.0990.0
R1.188.1000.0
R1.188.1010.0
R1.188.1050.0
R1.188.1060.0
R1.188.1070.0
R1.188.1120.0
R1.188.1280.0
R1.188.1340.0
R1.188.1440.0
R1.188.1450.0
R1.188.1460.0
R1.188.1480.0
R1.188.1810.0
R1.188.1820.0
R1.188.1830.0



Teile Nr. / Part No.
R1.188.1840.0
R1.188.1850.0
R1.188.1860.0
R1.188.1870.0
R1.188.1880.0
R1.188.1890.0
R1.188.1900.0
R1.188.1910.0
R1.188.1920.0
R1.188.1930.0
R1.188.3250.0
R1.188.3290.0
R1.188.3360.0
R1.188.3480.0
R1.188.3580.0
R1.188.3590.0
R1.188.3620.0
R1.188.3640.0
R1.188.3660.0
R1.188.3710.0
R1.188.3810.0
R1.188.3830.0
R1.188.3840.0
R1.188.3910.0
R1.188.3930.0
R1.188.4020.0
R1.188.4100.0
R1.188.4110.0
R1.188.4120.0
81.030.0100.0
81.030.0101.0
81.030.0110.0
81.030.0111.0

Ⓒ

Ⓐ

Ⓑ

Ⓓ

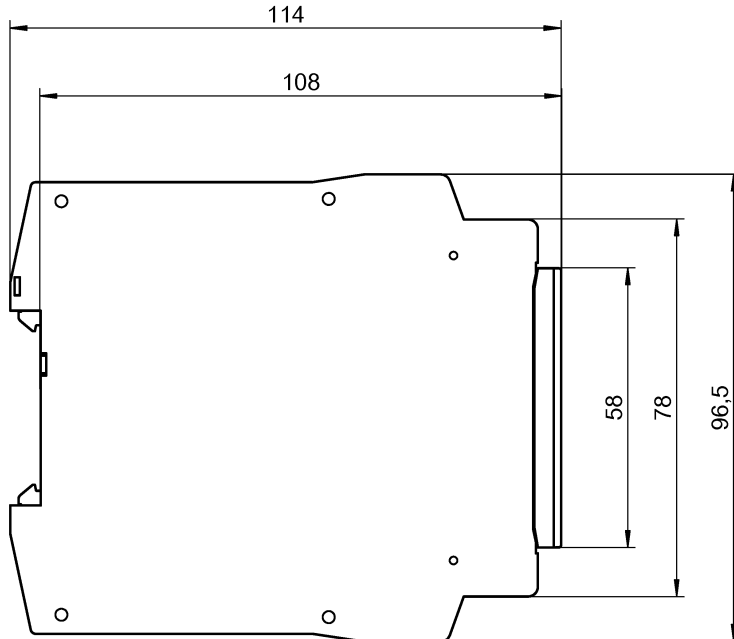

Weitere Angaben siehe KATALOG oder eKatalog. Additional data see CATALOG or eCatalog. www.wieland-electric.com eshop.wieland-electric.com

ja/yes ☐ Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!

Freitoleranz nach General tolerance	CAD-Zeichnung, keine manuellen Änderungen CAD-Drawing, no manual modifications allowed	1. Verwendung: First Use:	Blatt: Sheet:
	Werkstoff/ Material	2014 Tag/ Date 06.06.	Name Kötznier
Ⓒ 22.04.16	Maßstab/Scale	gezeichnet drawn	Zeichnung Nr./ Drawing No. T R1.188.0460.0 01K
Ⓓ 17.03.15		geprüft checked	
Ⓒ 03.02.15	Datei/ File: 030181_E01K.DCD	Normgepr. Stand: check	
Ⓑ 04.07.14		Ersatz für/ Replacement for:	
Ⓐ 25.06.14		Type	Benennung/ Title Maßbildzeichnung/dimension drawing
Index Datum/ Blatt Date/ Sheet	 wieland www.wieland-electric.com		Standardgehäuse u. -deckel, Baubreite 22,5mm, Schraubenklemmen steckbar standard housing and cover, overall with 22,5mm plug-in pcb terminal
Änderung/ Revision			

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seiner Inhalte sind verboten, soweit nicht ausdrücklich gestattet. Die Reproduktion, Verbreitung und Nutzung dieses Dokuments ist ohne schriftliche Genehmigung der Wieland Electric AG ist ohne weitere Erlaubnis ist verboten.