

ASi-5/ASi-3 PROFIsafe via PROFINET Gateway with integrated Safety Monitor

ASi-5 – Great data bandwidth, short cycle times

Compatible with all ASi generations

Safety Monitor supports ASi-5 Safety and ASi-3 Safety

PROFIsafe and Safe Link in one device

2 ASi-5/ASi-3 Master, PROFINET device

- ASi Safety input nodes report via PROFIsafe
- ASi Safety output nodes switch via PROFIsafe

Up to 64 release circuits

- up to 6 safe output circuits CAT4, SIL 3 on the Monitor
safe relays or electronic safe outputs

Safe ASi outputs are supported

- up to 64 independent ASi outputs
Multiple safe ASi outputs possible via a single ASi address

OPC UA interface and REST API for IIoT applications

Integrated web server for simple diagnostics and maintenance

Safe speed and standstill monitoring

Applications up to category 4/PLe/SIL 3

Chip card for storage of configuration and additional data



(Figure similar)



Figure	Fieldbus Interface	Safety communication	Inputs Safety ⁽¹⁾	Outputs Safety, SIL 3, cat. 4	ASi-5/ASi-3	ASi Safety	Number of ASi networks, number of ASi Master ⁽²⁾	Integrated decoupling, ASi current measurement in the gateway ⁽³⁾	Diagnostic and configuration interface ⁽⁴⁾	Article No.
	PROFINET, OPC UA	PROFIsafe (F-CPU) + Safe Link	6 x 1 channel or 3 x 2 channels	6 release circuits; 6 x electronic safe outputs	ASi-5 and ASi-3 compatible	ASi-5 Safety and ASi-3 Safety compatible	2 ASi networks, 2 ASi-5/ASi-3 masters	yes, max. 4 A/ ASi network	Ethernet fieldbus; Ethernet diagnostics	BWU3953

- (1) Inputs Safety**
Safe inputs can be configured as 1-channel or 2-channel depending on the desired application or PL and SIL level. Suitable for applications up to category 4/PLe/SIL3.
- (2) Number of ASi networks, number of ASi Master**
"Single Master": 1 ASi network, 1 ASi-3 Master.
"Double Master": 2 ASi networks, 2 ASi-3 Masters.
"Optional ASi Safety coupling circuit": 2 ASi networks, 1 ASi-3 Master.
- (3) Integrated decoupling, ASi current measurement in the gateway**
"yes, max. 4A/ASi network": Data decoupling integrated in the gateway. Cost-effective power for 2 ASi networks with 1 power supply (optionally supply of multiple Single Gateways by 1 power supply). Operation with short cable lengths with standard 24 V power supply possible.

ASi-5/ASi-3 PROFIsafe via PROFINET Gateway with integrated Safety Monitor

(4) Diagnostic and configuration interface

"Ethernet fieldbus + Ethernet diagnostic": Access to ASi master and safety monitor via Bihl+Wiedemann proprietary software over Ethernet diagnostics interface or Ethernet fieldbus interface.

The latest version of the device description file of the gateway with integrated safety monitor is available in the "Downloads" section of the respective device.

Article no.	BWU3953
Fieldbus Interface	
Type	PROFINET Conformance Class B. integrated switch complies with Conformance Class C (IRT capability) 2 x RJ-45,integrated 2-Port-Switch IRT capability
Transmission rate	10/100 MBit/s
Safety communication	PROFIsafe via PROFINET + Safe Link
IT interface	OPC UA server, web server, REST API
Function	PROFINET IO Device Media Redundancy Protocol (MRP) Shared Device
Card slot	chip card (BW4785) for storage of configuration and additional data
Ethernet interface	
Type	Ethernet; RJ-45 according IEEE 802.3
Transmission rate	10/100 MBit/s
Safety communication	Safe Link
IT interface	OPC UA server, web server, REST API
Programming in C	
Control III	optional
ASi	
ASi specification	ASi-5 + ASi-3
Cycle time	Cycle time ASi-5 (constant): 1,27 ms for 384 bits input data + 384 bits output data
	Cycle time ASi-3 (variable): 150 µs * (number of ASi-3 nodes + 2)
ASi Safety	ASi-5 Safety and ASi-3 Safety compatible
Operating voltage	30 V _{DC} (20 ... 31,6 V) (PELV voltage)
Operating current	300 mA
ASi Power24V capability ⁽¹⁾	yes
AUX	
Operating voltage	24 V _{DC} (19,2 ...28,8 V)
Max current consumption	7,2 A
Display	
LCD	indication of ASi addresses and error messages in plain text
LED PROFINET (green / red)	green: PROFINET communication active red: no PROFINET communication
LED power (green)	power on
LED config error (red)	configuration error
LED U ASi (green)	ASi voltage OK
LED ASi active (green)	ASi normal operation active
LED prg enable (green)	automatic address programming enabled
LED prj mode (yellow)	configuration mode active
LED AUX (green)	ASi power on and auxiliary power on
LEDs SI1 ... SI6 (yellow)	state of inputs: off: open on: close
LEDs SO1 ... SO6 (yellow)	state of outputs: off: open on: close

ASi-5/ASi-3 PROFIsafe via PROFINET Gateway with integrated Safety Monitor

Article no.	BWU3953
UL specifications (UL508)	
External protection	An isolated voltage source with a PELV/SELV voltage $\leq 30 V_{DC}$ must have internal or external current limiting
In general	UL mark does not provide UL certification for any functional safety rating or aspects of the above devices.
Environment	
Applied standards	EN 62026-2 EN 60529 EN 61000-6-2 EN 61000-6-4 EN 61131-2 EN 61326-3-1 EN 50581 EN 62061, SIL 3 EN 61508, SIL 3 EN ISO 13849-1, Performance-Level e EN ISO 13849-2
Operating altitude	max. 2000 m
Ambient temperature	-25 °C ... +55 °C (no condensation permitted)
Storage temperature	-25 °C ... +85 °C
Housing	stainless steel, for DIN rail mounting
Pollution degree	2
Protection category	IP20
Maximum tolerable shock and vibration stress	according EN 61131-2
Tolerable loading referring to humidity	according EN 61131-2
Voltage of insulation	$\geq 500 V$
Weight	800 g
Dimensions (W / H / D in mm)	109 / 120 / 106

(1) ASi Power24V

The device can be operated directly on a 24 V (PELV) power supply. The gateway has been optimized with integrated data coupling coils and adjustable self-resetting fuses for safe use of powerful 24 V power supplies.

Article no.	BWU3953
Safety monitor	
ASi Safety	ASi-5 Safety and ASi-3 Safety compatible
Start delay	< 10 s
Max. turn-off time	< 40 s
Antivalent switches for local inputs	yes
Standstill monitors for local inputs	6 axes up to 50 Hz ⁽¹⁾
Speed monitors for local inputs	3 to 6 axes up to 400 Hz ⁽²⁾
Selection of Mode of Safe Operation	yes
Connection	
Connection	Push-in terminals
Length of connector cable	unlimited ⁽³⁾
Input	
Inputs Safety	up to 6 x 1-channel safe inputs (SIL1, cat. 2, PLc) or up to 3 x 2-channel safe inputs (SIL3, cat. 4, PLe) ⁽⁴⁾
Inputs digital, EDM	up to 12 standard inputs ⁽⁴⁾
Switching current	15 mA (T = 100 μ s), continuously 4 mA at 24 V
Power supply	out of AUX

ASi-5/ASi-3 PROFIsafe via PROFINET Gateway with integrated Safety Monitor

Article no.	BWU3953
Output	
Number of release circuits on the monitor	6 release circuits; 6 x electronic safe outputs ⁽⁴⁾
Outputs	semiconductor output max. contact load: 1,2 A _{DC-13} at 30 V, $\Sigma = 7,2$ A in sum ⁽⁵⁾
Power supply (semiconductor outputs)	out of AUX
Test pulse (semiconductor outputs)	if output is on: minimum interval between 2 test pulses: 250 ms; maximum pulse width 1 ms


(1) connection at all SI or SO terminals possible.

(2) connection only at terminals SO1 ... SO6 configured as standard inputs (see "Variations of terminal configuration for BWU3953")

(3) loop resistance $\leq 150 \Omega$


(4) see "Variations of terminal configuration for BWU3953"

(5)

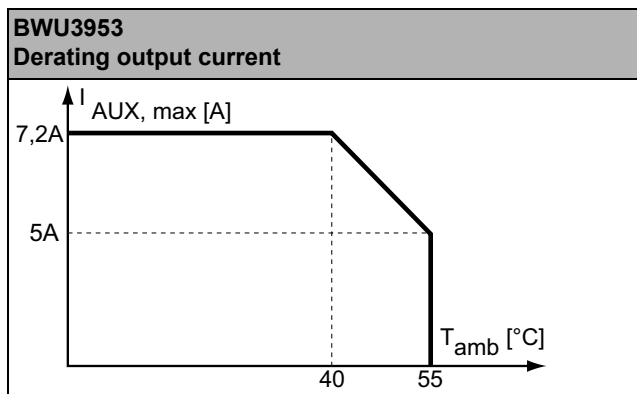

	BWU3953
Data decoupling integrated in the gateway	•
Redundant power supply out of ASi: all fundamental functions of the device remain available even in case of power failure in one of the two ASi networks	–
Current measurement of the ASi circuits	•
Self-resetting adjustable fuses	•
ASi earth fault monitor distinguishes between ASi cable and sensor cable	•
Cost-effective power for 2 ASi networks with 1 power supply	•

Safety outputs block diagram BWU3953

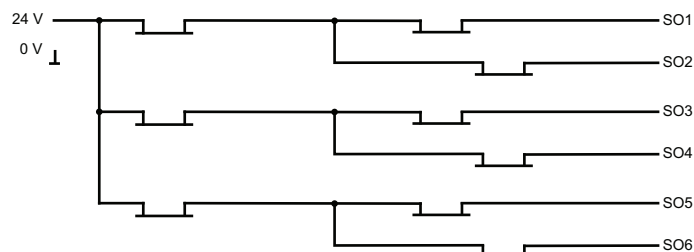

ASi-5/ASi-3 PROFIsafe via PROFINET Gateway with integrated Safety Monitor


Variations of terminal configuration for BWU3953

Terminal	up to 6 safe outputs	up to 6 safe 2 channel inputs for floating contacts in combination with T1, T2 ⁽¹⁾	up to 6 safe 2 channel inputs for antivalent switches ⁽¹⁾	up to 3 safe 2 channel inputs for OSSDs	up to 12 safe 1 channel inputs ⁽¹⁾	up to 12 standard inputs ⁽¹⁾
SI1	–	•	•	•	•	•
SI2	–	•	•	•	•	•
SI3	–	•	•	•	•	•
SI4	–	•	•	•	•	•
SI5	–	•	•	•	•	•
SI6	–	•	•	•	•	•
SO1 ⁽²⁾	•	•	•	–	•	•
SO2 ⁽²⁾	•	•	•	–	•	•
SO3 ⁽²⁾	•	•	•	–	•	•
SO4 ⁽²⁾	•	•	•	–	•	•
SO5 ⁽²⁾	•	•	•	–	•	•
SO6 ⁽²⁾	•	•	•	–	•	•

⁽¹⁾ Inputs must be supplied from the same 24 V voltage source connected to the supply terminals of the local safe I/Os of the device.

⁽²⁾ If outputs are configured as inputs, the input current has to be limited by an external element at ≤ 100mA

Connections: Gateway + Safety Monitor:

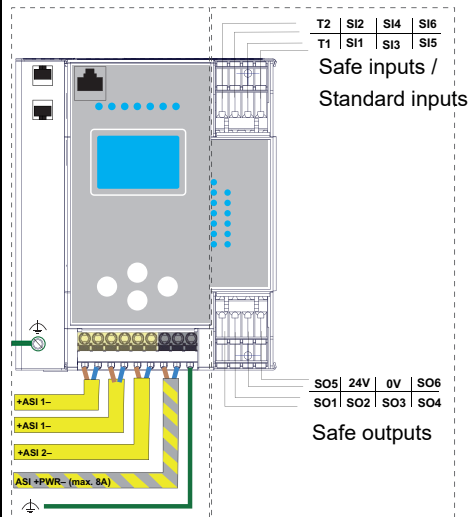BWU3953	Connection	Description
 Safe inputs / Standard inputs Safe outputs +ASI 1- +ASI 1- +ASI 2- ASI +PWR- (max. 8A) SO5 24V 0V SO6 SO1 SO2 SO3 SO4	SI1, SI3, SI5	Safe input terminal (T1)
	SI2, SI4, SI6	Safe input terminal (T2)
	T1	Clock output 1
	T2	Clock output 2
	SO1 ... SO6	Safe semiconductor outputs 1 ... 6
	24V, 0V	Power supply for local I/Os
	+ASI 1-, +ASI 2-	Connection of ASi circuits
	ASI +PWR-	Power supply for Gateway and ASi networks

Accessories:

- Safe contact expander, 1 or 2 independent channels (art. no. BWU2548 / BWU2539)
- Chip card for storage of configuration and additional data (art. no. BW4785)
- Bihl+Wiedemann Safety Suite - Safety Software for Configuration, Diagnostics and Commissioning (art. no. BW2916)
- Power supplies, e.g.: 30 V power supply, 4 A, 1 phase (art. no. BW4218), 30 V power supply, 8 A, 1 phase (art. no. BW4219), 30 V power supply, 8 A, 3 phases (art. no. BW4220), 30 V Power Supply, 16 A, 1 phase (art. no. BW4221), 30 V Power Supply, 16 A, 3 phases (art. no. BW4222) (for further power supply units visit www.bihl-wiedemann.de/en/products/accessories/power-supplies)
- PROFINET Master Simulators Licenses (art. no. BW4939, BW5069)