



MAN0560

Mini-ITX SBC with LGA1700 14th/13th/12th Gen Intel® Core™ i9/i7/i5/i3 Pentium® or Celeron® Processor, DisplayPort, HDMI, VGA, LVDS, USB 3.0, M.2, and Dual LAN

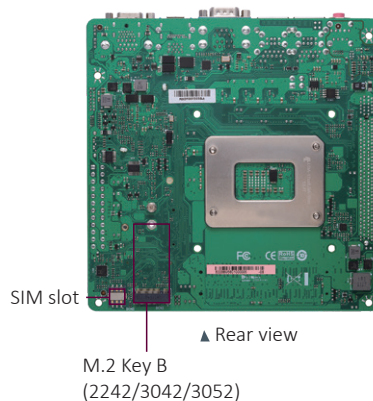

▲ ECM500

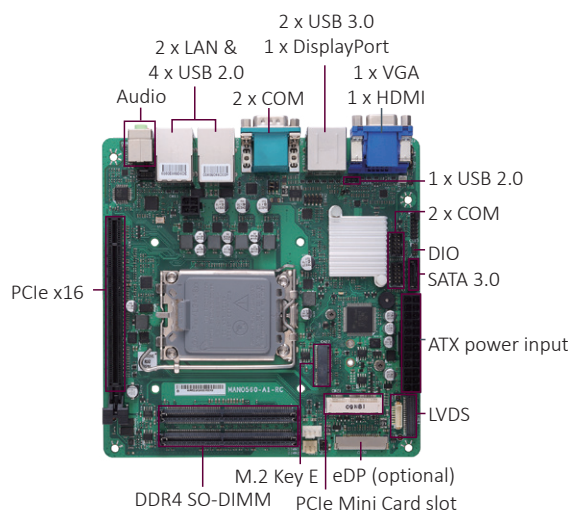

Quad-View



DDR4



M.2



PCle Mini

Features

- LGA1700 14th/13th/12th Gen Intel® Core™ i9/i7/i5/i3 Pentium® or Celeron® processor
- Intel® H610 chipset
- 2 DDR4 SO-DIMM for up to 64GB memory
- 2 USB 3.0, 5 USB 2.0 and 4 COM
- 1 PCIe x16, 1 M.2 Key E, 1 M.2 Key B, and 1 PCI Express Mini PCI slot
- 1 SATA-600

Specifications

Core System

CPU	LGA1700 14th/13th/12th Gen Intel® Core™ i9/i7/i5/i3 Pentium® or Celeron® processor (up to 65W)
System Memory	2 x 260-pin DDR4-3200/2666/2400 SO-DIMM, up to 64GB
Chipset	Intel® H610
BIOS	AMI
Storage	1 x SATA 3.0 1 x M.2 Key B type 2242 (support SATA 3.0) 1 x full-size PCI Express Mini Card slot (support SATA 3.0)
Watchdog Timer	255 levels, 1 to 255 sec.

Specifications

Core System

Expansion Interface	1 x PCIe x16 1 x SIM slot 1 x M.2 Key B 2242/3042/3052 (supports PCIe + SATA or PCIe + USB 3.0) 1 x M.2 Key E 2230 1 x PCI Express Mini Card slot (supports PCIe x1 + USB 2.0 or SATA + USB 2.0)
Battery Lithium	Lithium 3V/220mAH
Power Input	Standard 12V ATX power 24+4 pin ATX connector AT mode auto power function supported
Power Consumption (Max.)	160W

Display

Chipset	Intel® UHD Graphics
Display Interface	1 x DisplayPort 1 x HDMI 1 x LVDS (eDP BOM optional) 1 x VGA

I/O

External	1 x 2.5GbE/1GbE/100Mbps/10Mbps RJ-45 with support for Wake-on-LAN and PXE using Intel® I225-V 1 x 1GbE/100Mbps/10Mbps RJ-45 with support for Wake-on-LAN and PXE using Intel® I219-V 1 x audio jack (Mic-in, Line-out) 2 x USB 3.0 4 x USB 2.0 1 x RS-232/422/485 (with +5V/+12V power) 1 x RS-232 1 x DisplayPort 1 x VGA 1 x HDMI
Internal	1 x PCIe x16 1 x audio header (Line-in, Line-out) 1 x USB 2.0 2 x RS-232 1 x LVDS 1 x SATA-600 1 x 24-pin ATX power input connector 1 x 4-pin ATX Vcore power input connector

key benefit

TPM	Onboard TPM 2.0 (TPM IC: SLB9670)
Digital I/O	8-channel programmable input/output
Hardware Monitoring	Detect CPU/system temperature, voltage and fan speed

Mechanical and Environmental

Size	170 x 170 mm
Board Thickness	1.6 mm
Operating Temperature	0°C to +60°C (+32°F to +140°F)
Relative Humidity	10% to 95% relative humidity, non-condensing

ECM500, Embedded Chassis

Construction	Heavy-duty cold-rolled steel
I/O	1 x power button 1 x standard Mini-ITX I/O bracket space 3 x D-Sub connector 1 x PCI Express Card slot
Dimensions (W x D x H)	300 x 217.2 x 74 mm (11.81" x 8.55" x 2.91")
ECM500 (P/N: E272500109)	Embedded MicroBox for low power Mini-ITX SBC

Packing List

I/O bracket

Ordering Information

MANO560-H-B-U (P/N: E38M560100)	Mini-ITX SBC with LGA1700 14th/13th/12th Gen Intel® Core™ processor, DisplayPort, HDMI, VGA, LVDS, USB 3.0, M.2 for USB 3.0 interface, mPCIe (SATA+USB), dual LAN, HD audio, and bulk packing
MANO560-H-S-U (P/N: E38M560101)	Mini-ITX SBC with LGA1700 14th/13th/12th Gen Intel® Core™ processor, DisplayPort, HDMI, VGA, LVDS, USB 3.0, M.2 for USB 3.0 interface, mPCIe (SATA+USB), dual LAN, HD audio, and single box packing
MANO560-H-B-S (P/N: E38M560102)	Mini-ITX SBC with LGA1700 14th/13th/12th Gen Intel® Core™ processor, DisplayPort, HDMI, VGA, LVDS, USB 3.0, M.2 for SATA interface, mPCIe (PCIe+USB), dual LAN, HD audio, and bulk packing
MANO560-H-S-S (P/N: E38M560103)	Mini-ITX SBC with LGA1700 14th/13th/12th Gen Intel® Core™ processor, DisplayPort, HDMI, VGA, LVDS, USB 3.0, M.2 for SATA interface, mPCIe (PCIe+USB), dual LAN, HD audio, and single box packing
Optional	
505000001000	LGA1700 cooler 1U 4500 RPM
505000001100	LGA1700 cooler 1.5U 5500 RPM
594P8802810E	USB cable L: 150 mm with screw-lock USB Type-A female x 1 /HS P1.25-4P internal
590000039200	COM cable D-Sub 9P to DuPont 2 x 5 P2.0 L=300 mm
594E3628010E	SATA 2.0 signal cable 180D, L=250 mm (RC)

Block Diagram

