


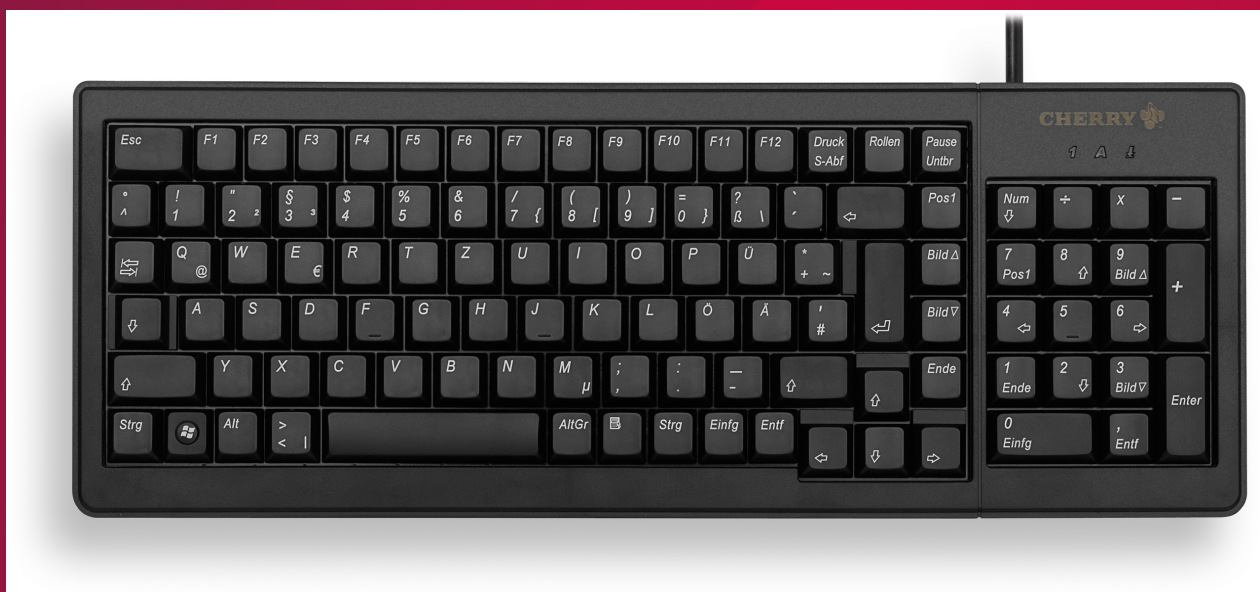

G84-5200 XS

DATASHEET

CHERRY G84-5200 XS

SMALL, FLAT AND EXTREMELY ROBUST

The compact keyboard 'XS Complete' (G84-5200) offers a full keyboard layout complete with number block and is ideal for all applications with limited space and requiring frequent number entries.



HIGHLIGHTS

- Full configuration with numeric keypad Ideal for applications where numbers need to be typed frequently
- High reliability and precise keystroke accuracy due to Gold Crosspoint contacts (Cherry ML technology) on each individual key
- Ideal for continuous use thanks to its high durability of more than 20 million keystrokes for each key
- Compact dimensions and very low overall height, making it ideal for tight spaces and 19" applications
- Uniform dimensions and dimensions are the same for the entire XS product series: the keypad can be selected to match the respective application
- Low weight: for special cases where every gram counts
- Plug & Play: compatible with standard operating system drivers
- Compatible with Code Set 3 and Unified POS
- Clamping option for permanent mounting
- Detachable support legs for individual configuration of the keyboard inclination
- Programmable keys for further time savings

SCOPE OF DELIVERY

- Manual
- Keyboard

TECHNICAL DATA

PRODUCT INFORMATION

Dimensions and weight (without packaging)	374 mm × 139 mm × 20 mm 540 g
Dimensions and weight (including packaging)	393 mm × 196 mm × 33 mm 670 g
Model number	ML5200
Warranty	2-year statutory warranty + 1-year manufacturer's warranty
Product approvals	- BSMI - RCM - CE - cURus - FCC - VCCI - VDE - UKCA
Software support	CHERRY KEYS
Operating system	Windows
System Requirements-Hardware	USB-A

TEMPERATURE

Min. operating temperature	0 °C
Max. operating temperature	50 °C

KEYBOARD

Keycap material	ABS
USB-Hub	no
Illumination	No

Max. current consumption (mA) of keyboard	35 mA
Keyboard format	Compact (75%)
N-Key Rollover	no
Anti-ghosting	no

PRODUCT VARIANTS

PART NUMBER	LAYOUT	COLOUR	SWITCHES
G84-5200LCMCH-2	CH (Switzerland)	Black	CHERRY ML
G84-5200LCMDE-2	DE (Germany)	Black	CHERRY ML
G84-5200LCMES-2	ES (Spain)	Black	CHERRY ML
G84-5200LCMEU-2	EU (USA+ €-Symbol)	Black	CHERRY ML
G84-5200LCMFR-2	FR (France)	Black	CHERRY ML
G84-5200LCMGB-2	GB (United Kingdom)	Black	CHERRY ML
G84-5200LCMCH-0	CH (Switzerland)	Grey	CHERRY ML
G84-5200LCMDE-0	DE (Germany)	Grey	CHERRY ML
G84-5200LCMEU-0	EU (USA+ €-Symbol)	Grey	CHERRY ML
G84-5200LCMFR-0	FR (France)	Grey	CHERRY ML

G84-5200 XS [G84-5200LCMCH-2]



Layout: CH (Switzerland)
Colour: Black
Switches: CHERRY ML

Part number	G84-5200LCMCH-2
EAN	4025112072260
UPC	840183601294

PRODUCT INFORMATION

Dimensions and weight (without packaging)	374 mm × 139 mm × 20 mm 557 g
Dimensions and weight (including packaging)	390 mm × 195 mm × 30 mm 702 g
Model number	ML5200
Warranty	2-year statutory warranty + 1-year manufacturer's warranty
Product approvals	- BSMI - RCM - CE - cURus - FCC - VCCI - VDE - UKCA
Software support	CHERRY KEYS
Operating system	Windows
System Requirements-Hardware	USB-A

TEMPERATURE

Min. operating temperature	0 °C
Max. operating temperature	50 °C

KEYBOARD

Keycap material	ABS
USB-Hub	no
Illumination	No
Max. current consumption (mA) of keyboard	35 mA
Keyboard format	Compact (75%)
N-Key Rollover	no
Anti-ghosting	no

SWITCHES: CHERRY ML



LAYOUT

RGB	no
Cover colour	Black
Bottom housing colour	Black
Actuation force	45 cN
Initial force	30 cN

G84-5200 XS [G84-5200LCMDE-2]



Layout: DE (Germany)
Colour: Black
Switches: CHERRY ML

Part number	G84-5200LCMDE-2
EAN	4025112071119
UPC	840183601294

PRODUCT INFORMATION

Dimensions and weight (without packaging)	374 mm × 139 mm × 20 mm 557 g
Dimensions and weight (including packaging)	390 mm × 195 mm × 30 mm 702 g
Model number	ML5200
Warranty	2-year statutory warranty + 1-year manufacturer's warranty
Product approvals	- BSMI - RCM - CE - cURus - FCC - VCCI - VDE - UKCA
Software support	CHERRY KEYS
Operating system	Windows
System Requirements-Hardware	USB-A

TEMPERATURE

Min. operating temperature	0 °C
Max. operating temperature	50 °C

KEYBOARD

Keycap material	ABS
USB-Hub	no
Illumination	No
Max. current consumption (mA) of keyboard	35 mA
Keyboard format	Compact (75%)
N-Key Rollover	no
Anti-ghosting	no

SWITCHES: CHERRY ML



LAYOUT

RGB	no
Cover colour	Black
Bottom housing colour	Black
Actuation force	45 cN
Initial force	30 cN

G84-5200 XS [G84-5200LCMES-2]



Layout: ES (Spain)
Colour: Black
Switches: CHERRY ML

Part number	G84-5200LCMES-2
EAN	4025112073106
UPC	840183601294

PRODUCT INFORMATION

Dimensions and weight (without packaging)	374 mm × 139 mm × 20 mm 557 g
Dimensions and weight (including packaging)	390 mm × 195 mm × 30 mm 702 g
Model number	ML5200
Warranty	2-year statutory warranty + 1-year manufacturer's warranty
Product approvals	- BSMI - RCM - CE - cURus - FCC - VCCI - VDE - UKCA
Software support	CHERRY KEYS
Operating system	Windows
System Requirements-Hardware	USB-A

TEMPERATURE

Min. operating temperature	0 °C
Max. operating temperature	50 °C

KEYBOARD

Keycap material	ABS
USB-Hub	no
Illumination	No
Max. current consumption (mA) of keyboard	35 mA
Keyboard format	Compact (75%)
N-Key Rollover	no
Anti-ghosting	no

SWITCHES: CHERRY ML



LAYOUT

RGB	no
Cover colour	Black
Bottom housing colour	Black
Actuation force	45 cN
Initial force	30 cN

G84-5200 XS [G84-5200LCMEU-2]



Layout: EU (USA+ €-Symbol)

Colour: Black

Switches: CHERRY ML

Part number	G84-5200LCMEU-2
-------------	-----------------

EAN	4025112071027
-----	---------------

UPC	840183601287
-----	--------------

PRODUCT INFORMATION

Dimensions and weight (without packaging)	374 mm × 139 mm × 20 mm 557 g
---	---------------------------------

Dimensions and weight (including packaging)	390 mm × 195 mm × 30 mm 702 g
---	---------------------------------

Model number	ML5200
--------------	--------

Warranty	2-year statutory warranty + 1-year manufacturer's warranty
----------	--

Product approvals	- BSMI - RCM - CE - cURus - FCC - VCCI - VDE - UKCA
-------------------	---

Software support	CHERRY KEYS
------------------	-------------

Operating system	Windows
------------------	---------

System Requirements-Hardware	USB-A
------------------------------	-------

TEMPERATURE

Min. operating temperature	0 °C
Max. operating temperature	50 °C

KEYBOARD

Keycap material	ABS
USB-Hub	no
Illumination	No
Max. current consumption (mA) of keyboard	35 mA
Keyboard format	Compact (75%)
N-Key Rollover	no
Anti-ghosting	no

SWITCHES: CHERRY ML



LAYOUT

RGB	no
Cover colour	Black
Bottom housing colour	Black
Actuation force	45 cN
Initial force	30 cN

G84-5200 XS [G84-5200LCMFR-2]



Layout: FR(France)
Colour: Black
Switches: CHERRY ML

Part number	G84-5200LCMFR-2
EAN	4025112072246
UPC	840183601294

PRODUCT INFORMATION

Dimensions and weight (without packaging)	374 mm × 139 mm × 20 mm 557 g
Dimensions and weight (including packaging)	390 mm × 195 mm × 30 mm 702 g
Model number	ML5200
Warranty	2-year statutory warranty + 1-year manufacturer's warranty
Product approvals	- BSMI - RCM - CE - cURus - FCC - VCCI - VDE - UKCA
Software support	CHERRY KEYS
Operating system	Windows
System Requirements-Hardware	USB-A

TEMPERATURE

Min. operating temperature	0 °C
Max. operating temperature	50 °C

KEYBOARD

Keycap material	ABS
USB-Hub	no
Illumination	No
Max. current consumption (mA) of keyboard	35 mA
Keyboard format	Compact (75%)
N-Key Rollover	no
Anti-ghosting	no

SWITCHES: CHERRY ML



LAYOUT

RGB	no
Cover colour	Black
Bottom housing colour	Black
Actuation force	45 cN
Initial force	30 cN

G84-5200 XS [G84-5200LCMGB-2]



Layout: GB (United Kingdom)
Colour: Black
Switches: CHERRY ML

Part number	G84-5200LCMGB-2
EAN	4025112072253
UPC	840183601294

PRODUCT INFORMATION

Dimensions and weight (without packaging)	374 mm × 139 mm × 20 mm 557 g
Dimensions and weight (including packaging)	390 mm × 195 mm × 30 mm 702 g
Model number	ML5200
Warranty	2-year statutory warranty + 1-year manufacturer's warranty
Product approvals	- BSMI - RCM - CE - cURus - FCC - VCCI - VDE - UKCA
Software support	CHERRY KEYS
Operating system	Windows
System Requirements-Hardware	USB-A

TEMPERATURE

Min. operating temperature	0 °C
Max. operating temperature	50 °C

KEYBOARD

Keycap material	ABS
USB-Hub	no
Illumination	No
Max. current consumption (mA) of keyboard	35 mA
Keyboard format	Compact (75%)
N-Key Rollover	no
Anti-ghosting	no

SWITCHES: CHERRY ML



LAYOUT

RGB	no
Cover colour	Black
Bottom housing colour	Black
Actuation force	45 cN
Initial force	30 cN

G84-5200 XS [G84-5200LCMCH-0]



Layout: CH (Switzerland)
Colour: Grey
Switches: CHERRY ML

Part number	G84-5200LCMCH-0
EAN	4025112072277
UPC	840183601294

PRODUCT INFORMATION

Dimensions and weight (without packaging)	374 mm × 139 mm × 20 mm 557 g
Dimensions and weight (including packaging)	390 mm × 195 mm × 30 mm 702 g
Model number	ML5200
Warranty	2-year statutory warranty + 1-year manufacturer's warranty
Product approvals	- BSMI - RCM - CE - cURus - FCC - VCCI - VDE - UKCA
Software support	CHERRY KEYS
Operating system	Windows
System Requirements-Hardware	USB-A

TEMPERATURE

Min. operating temperature	0 °C
Max. operating temperature	50 °C

KEYBOARD

Keycap material	ABS
USB-Hub	no
Illumination	No
Max. current consumption (mA) of keyboard	35 mA
Keyboard format	Compact (75%)
N-Key Rollover	no
Anti-ghosting	no

SWITCHES: CHERRY ML



LAYOUT

RGB	no
Cover colour	Black
Bottom housing colour	Black
Actuation force	45 cN
Initial force	30 cN

G84-5200 XS [G84-5200LCMDE-0]



Layout: DE (Germany)
Colour: Grey
Switches: CHERRY ML

Part number	G84-5200LCMDE-0
EAN	4025112071126
UPC	840183601294

PRODUCT INFORMATION

Dimensions and weight (without packaging)	374 mm × 139 mm × 20 mm 557 g
Dimensions and weight (including packaging)	390 mm × 195 mm × 30 mm 702 g
Model number	ML5200
Warranty	2-year statutory warranty + 1-year manufacturer's warranty
Product approvals	- BSMI - RCM - CE - cURus - FCC - VCCI - VDE - UKCA
Software support	CHERRY KEYS
Operating system	Windows
System Requirements-Hardware	USB-A

TEMPERATURE

Min. operating temperature	0 °C
Max. operating temperature	50 °C

KEYBOARD

Keycap material	ABS
USB-Hub	no
Illumination	No
Max. current consumption (mA) of keyboard	35 mA
Keyboard format	Compact (75%)
N-Key Rollover	no
Anti-ghosting	no

SWITCHES: CHERRY ML



LAYOUT

RGB	no
Cover colour	Black
Bottom housing colour	Black
Actuation force	45 cN
Initial force	30 cN

G84-5200 XS [G84-5200LCMEU-0]



Layout: EU (USA+ €-Symbol)

Colour: Grey

Switches: CHERRY ML

Part number	G84-5200LCMEU-0
EAN	4025112071010
UPC	840183601294

PRODUCT INFORMATION

Dimensions and weight (without packaging)	374 mm × 139 mm × 20 mm 545 g
Dimensions and weight (including packaging)	390 mm × 195 mm × 30 mm 693 g
Model number	ML5200
Warranty	2-year statutory warranty + 1-year manufacturer's warranty
Product approvals	- BSMI - RCM - CE - cURus - FCC - VCCI - VDE - UKCA
Software support	CHERRY KEYS
Operating system	Windows
System Requirements-Hardware	USB-A

TEMPERATURE

Min. operating temperature	0 °C
Max. operating temperature	50 °C

KEYBOARD

Keycap material	ABS
USB-Hub	no
Illumination	No
Max. current consumption (mA) of keyboard	35 mA
Keyboard format	Compact (75%)
N-Key Rollover	no
Anti-ghosting	no

SWITCHES: CHERRY ML



LAYOUT

RGB	no
Cover colour	Black
Bottom housing colour	Black
Actuation force	45 cN
Initial force	30 cN

G84-5200 XS [G84-5200LCMFR-0]



Layout: FR(France)
Colour: Grey
Switches: CHERRY ML

Part number	G84-5200LCMFR-0
EAN	4025112071300
UPC	840183601294

PRODUCT INFORMATION

Dimensions and weight (without packaging)	374 mm × 139 mm × 20 mm 557 g
Dimensions and weight (including packaging)	390 mm × 195 mm × 30 mm 702 g
Model number	ML5200
Warranty	2-year statutory warranty + 1-year manufacturer's warranty
Product approvals	- BSMI - RCM - CE - cURus - FCC - VCCI - VDE - UKCA
Software support	CHERRY KEYS
Operating system	Windows
System Requirements-Hardware	USB-A

TEMPERATURE

Min. operating temperature	0 °C
Max. operating temperature	50 °C

KEYBOARD

Keycap material	ABS
USB-Hub	no
Illumination	No
Max. current consumption (mA) of keyboard	35 mA
Keyboard format	Compact (75%)
N-Key Rollover	no
Anti-ghosting	no

SWITCHES: CHERRY ML



LAYOUT

RGB	no
Cover colour	Black
Bottom housing colour	Black
Actuation force	45 cN
Initial force	30 cN

© Cherry Europe GmbH
Cherrystraße 2 · 91275 Auerbach/OPf. · Germany
cherry-world.com · cherry.de

Sales Support · Technischer Support · eHealth Support
+49 9643 - 2061 - 100
www.cherry.de/de-de/kontakt

Errors, technical changes and delivery options reserved. Technical information refers only to the specification of the products.