

AVVOLGITORE PER CAVI ELETTRICI "SERIE LCR"

ENROULEUR DE CÂBLE "SÉRIE LCR"


"SERIES LCR" CABLE REEL

KABELROLLE "SERIE LCR"

LCR

Horizontal application




Max. tension: 400 V
 Max. current: See table
 Optional: CANBus, Ethernet, Profinet (with approval)
 Max cable speed: 30 m/min
 Protection degree: IP 66
 Temperature range: -20/+60°C



Automatici a molla,
non idonei per utilizzo
manuale.



Automatic spring driven,
manual use is not allowed.

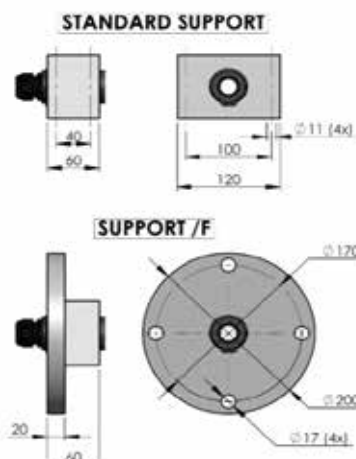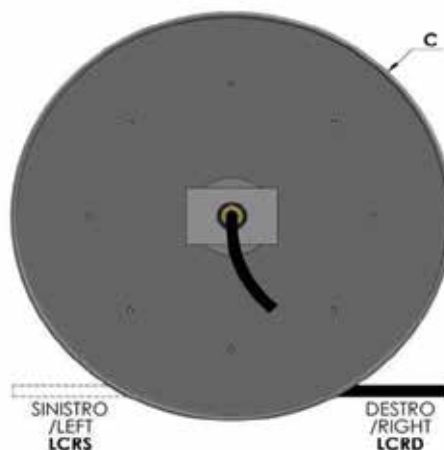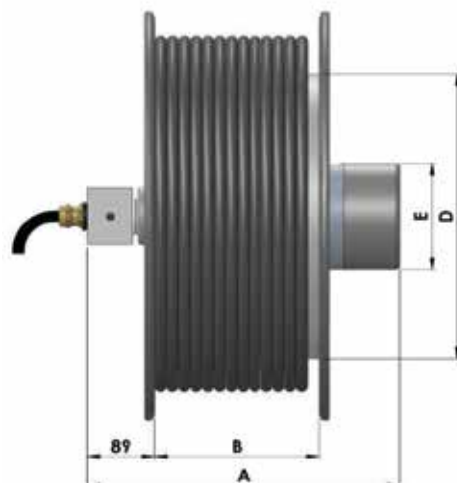

Disegno tecnico disponibile a richiesta
 Technical drawing available on request



50,00

Support /F

Cavo/Cable				V	Collettore Slip-ring	A	B	C	D	E	Senza cavo - Without cable	Con cavo - With cable						
Tipo/Type		Ø mm	Usable length [m]			mm						kg	Aggiungere / Add →		/HF		/PUR	
												kg	CODE			kg		kg
4	4x1,5 mm²	11	45	400	3F+T 21A	410	215	520	390	150			LCRD 520.041545					
	4x2,5 mm²	12	40	400	3F+T 35A	410	215	520	390	150			LCRD 520.042540					
	4x4 mm²	13	35	400	3F+T 35A	410	215	570	390	150			LCRD 570.044035					
			45			410	215	570	390	150			LCRD 570.044045					
			55			410	215	570	390	150			LCRD 570.044055					
			75			410	255	600	390	150			LCRD 600.044075					
	4x6 mm²	15	30	400	3F+T 35A	450	255	600	390	200			LCRD 600.046030					
			40			450	255	600	390	200			LCRD 600.046040					
			60			450	255	700	390	200			LCRD 700.046060					
	4x10 mm²	19	40	400	3F+T 88A	450	255	600	390	200			LCRD 600.041040					
			55			450	255	700	390	200			LCRD 700.041055					
			70			450	255	800	390	200			LCRD 800.041070					
			80			450	255	900	490	200			LCRD 900.041080					
4x16 mm²	21	15	400	3F+T 88A	450	215	600	390	200			LCRD 600.041615						
		38			450	215	700	390	200			LCRD 700.041638						
		65			490	300	950	770	200			LCRD 950.041665						
4x25 mm²	25	38	400	3F+T 176A	450	255	700	390	200			LCRD 700.042538						
5	5x1,5 mm²	12	50	400	3F+N+T 21A	450	255	520	390	150			LCRD 520.051550					
	5x2,5 mm²	13	35	400	3F+N+T 35A	450	255	520	390	150			LCRD 520.052535					
			70			450	255	600	390	150			LCRD 600.052570					
			80			450	255	600	390	150			LCRD 600.052580					
	5x4 mm²	15	50	400	3F+N+T 35A	490	255	600	390	200			LCRD 600.054050					
	5x6 mm²	18	30	400	3F+N+T 35A	490	255	600	390	200			LCRD 600.056030					
			35			490	255	600	390	200			LCRD 600.056035					
			40			490	255	700	390	200			LCRD 700.056040					
60			490			255	900	700	200			LCRD 900.056060						

AVVOLGITORE PER CAVI ELETTRICI "SERIE LCR"

ENROULEUR DE CÂBLE "SÉRIE LCR"


"SERIES LCR" CABLE REEL

KABELROLLE "SERIE LCR"

LCR

Horizontal application




Max. tension: 400 V
 Max. current: See table
 Optional: CANBus, Ethernet, Profinet (with approval)
 Max cable speed: 30 m/min
 Protection degree: IP 66
 Temperature range: -20/+60°C



Automatici a molla,
non idonei per utilizzo
manuale.



Automatic spring driven,
manual use is not allowed.

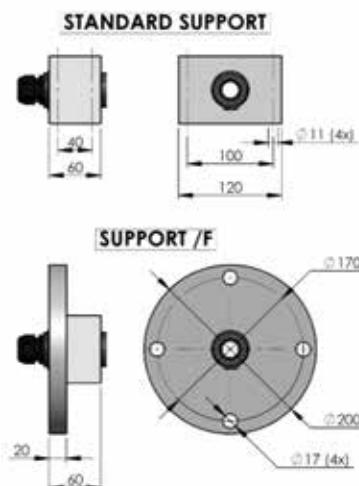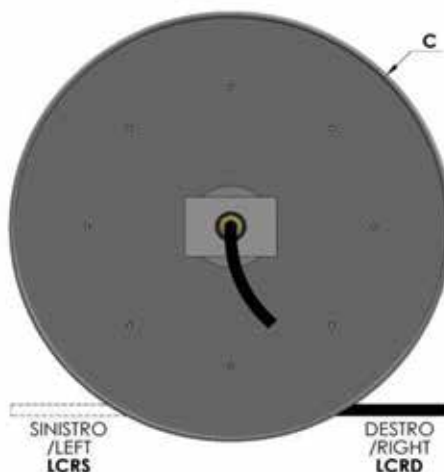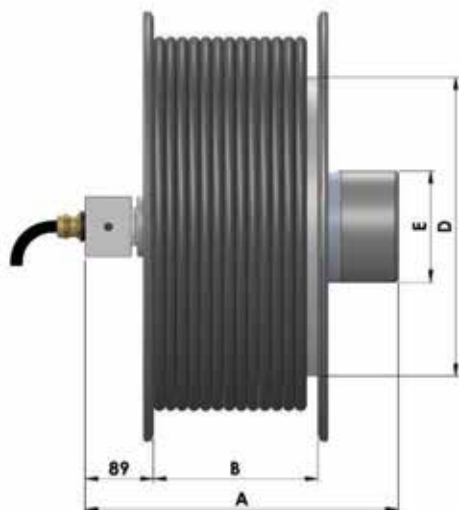

Disegno tecnico disponibile a richiesta
 Technical drawing available on request




50,00

Support /F

Cavo/Cable				V	Collettore Slip-ring	A	B	C	D	E	Senza cavo - Without cable		Con cavo - With cable								
Tipo/Type		Ø mm	Usable length [m]			mm							kg	Aggiungere / Add →		/HF		/PUR			
													kg	CODE				kg			kg
	5x10 mm²	20	50	400	3F+N+T 88A	415	255	700	390	200			LCRD 700.051050								
			70			500	350	800	490	200			LCRD 800.051070								
	5x16 mm²	23	25	400	3F+N+T 88A	415	255	700	390	200			LCRD 700.051625								
			70			500	350	800	490	200			LCRD 800.051670								
7	7x1,5 mm²	11	45	400	21A	410	215	500	390	150			LCRD 500.071545								
	7x2,5 mm²	14	35	400	35A	410	215	570	390	150			LCRD 570.072535								
10 + ETH	10x1,5 mm² + profinet	15	55	400	21A	490	215	600	390	150			LCRD 600.101555/ETH								
12	12x1,5 mm²	16	55	400	21A	445	255	700	390	200			LCRD 700.121055								
	12x2,5 mm²	20	35	400	35A	490	256	570	390	200			LCRD 570.122535								
18	18x1,5 mm²	18	40	400	21A	490	255	700	490	150			LCRD 700.161040								
24	24x2,5 mm²	23	30	400	35A	490	255	600	490	200			LCRD 600.242530								
			40			490	255	700	490	200			LCRD 700.242540								
			50			490	255	800	490	200			LCRD 800.242550								
25	25x0,5 mm²	16	45	400	2A	415	160	700	390	200			LCRD 700.240545 LCR 700.121533								
36	36x2,5 mm²	29	15	400	35A	430	215	650	390	200			LCRD 650.362515								

AVVOLGITORE PER CAVI ELETTRICI "SERIE LCR"
ENROULEUR DE CÂBLE "SÉRIE LCR"
"SERIES LCR" CABLE REEL
KABELROLLE "SERIE LCR"
LCR/VD
Vertical application

Max. tension: 400 V
 Max. current: See table
 Optional: CANBus, Ethernet, Profinet (with approval)
 Max cable speed: 30 m/min
 Protection degree: IP 66
 Temperature range: -20/+60°C





/ VD


Automatici a molla,
non idonei per utilizzo
manuale.



Automatic spring driven,
manual use is not
allowed.

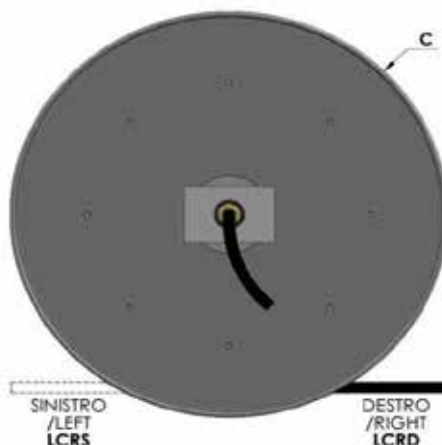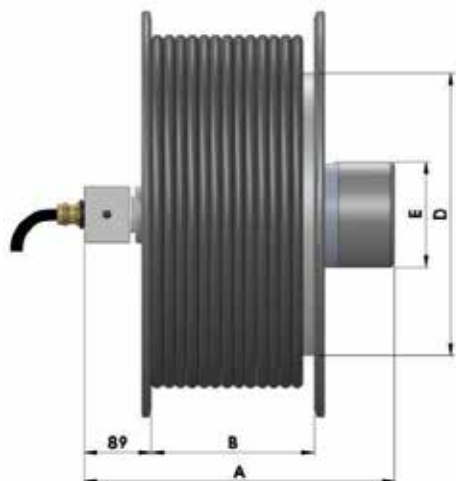

Disegno tecnico disponibile a richiesta
 Technical drawing available on request

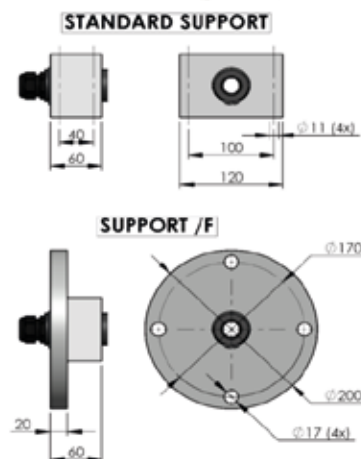

Cavo/Cable				V	Collettore Slip-ring	A	B	C	D	E	Senza cavo - Without cable		Con cavo - With cable PUR-HF		
Tipo/Type		Ø mm	Usable length [m]			mm						kg		CODE	kg
4	4x1,5 mm²	11	45	400	3F+T 21A	410	215	520	390	150				LCRD 520.041545/VD	
	4x2,5 mm²	12	40	400	3F+T 35A	410	215	520	390	150				LCRD 520.042540/VD	
	4x4 mm²	13	35	400	3F+T 35A	410	215	570	390	150				LCRD 570.044035/VD	
			45								LCRD 570.044045/VD				
	4x6 mm²	15	30	400	3F+T 35A	450	255	600	390	200				LCRD 600.046030/VD	
			50									LCRD 700.046050/VD			
	4x10 mm²	19	40	400	3F+T 88A	450	255	600	390	200				LCRD 600.041040/VD	
	4x16 mm²	21	15	400	3F+T 88A	450	215	600	390	200				LCRD 600.041615/VD	
38											LCRD 700.041638/VD				
	4x25 mm²	25	25	400	3F+T 176A	450	255	700	390	200				LCRD 600.042525/VD	
5	5x1,5 mm²	12	50	400	3F+N+T 21A	450	255	520	390	150				LCRD 520.051550/VD	
	5x2,5 mm²	13	35	400	3F+N+T 35A	450	255	520	390	150				LCRD 520.052535/VD	
			50									LCRD 600.052550/VD			
	5x6 mm²	18	30	400	3F+N+T 35A	490	255	600	390	200				LCRD 600.056030/VD	
			35									LCRD 600.056035/VD			
			40									LCRD 700.056040/VD			
5x10 mm²	20	35	400	3F+N+T 88A	415	255	700	390	200				LCRD 700.051035/VD		
5x16 mm²	23	25	400	3F+N+T 88A	415	255	700	390	200				LCRD 700.051625/VD		

AVVOLGITORE PER CAVI ELETTRICI "SERIE LCR"

ENROULEUR DE CÂBLE "SÉRIE LCR"


"SERIES LCR" CABLE REEL

KABELROLLE "SERIE LCR"

LCR/VD

Vertical application



Max. tension: 400 V
 Max. current: See table
 Optional: CANBus, Ethernet, Profinet (with approval)
 Max cable speed: 30 m/min
 Protection degree: IP 66
 Temperature range: -20/+60°C




Automatici a molla,
non idonei per utilizzo
manuale.



Automatic spring driven,
manual use is not
allowed.

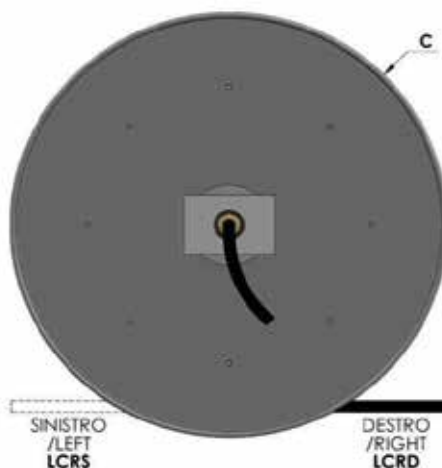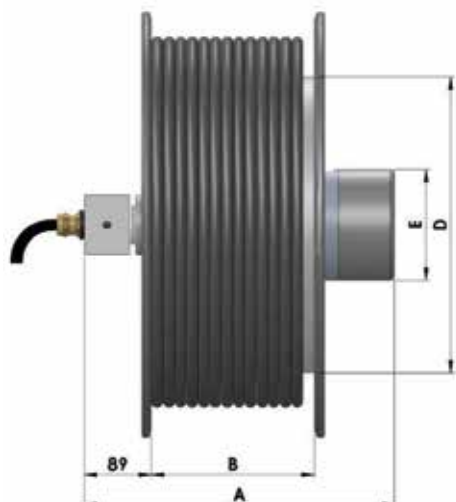

Disegno tecnico disponibile a richiesta
 Technical drawing available on request

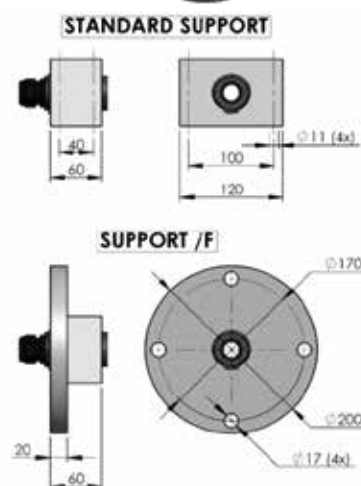

50,00

Support /F

Cavo/Cable			V	Collettore Slip-ring	A	B	C	D	E	Senza cavo - Without cable		Con cavo - With cable PUR-HF		
Tipo/Type	Ø mm	Usable length [m]									kg		CODE	kg
7	7x1,5 mm ²	11	45	400	21A	410	215	500	390				LCRD 500.071545/VD	
			80				256	700	490				LCRD 700.071580/VD	
	7x2,5 mm ²	14	35	400	35A	410	215	570	390				LCRD 570.072535/VD	
12	12x1,5 mm ²	16	50	400	21A	445	255	700	390	200			LCRD 700.121050/VD	
	12x2,5 mm ²	20	35	400	35A	490	256	570	390	200			LCRD 570.122535/VD	
18	18x1,5 mm ²	18	40	400	21A	490	255	700	490	150			LCRD 700.161040/VD	
24	24x2,5 mm ²	23	25	400	35A	430	255	700	490	200			LCRD 700.242525/VD	
36	36x2,5 mm ²	29	15	400	35A	430	215	650	390	200			LCRD 650.362515/VD	