TKG-104-MB-IP68-VESA-GREY

INDUPROOF Advanced

TKG-104-MB-IP68-VESA-BLACK

INDUPROOF Advanced

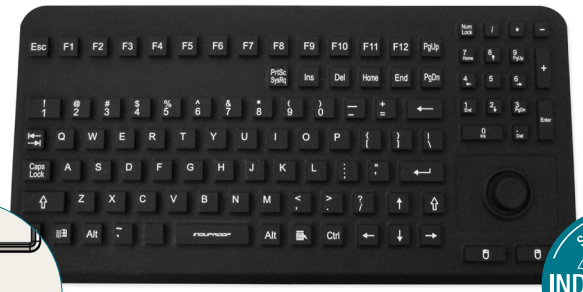



SILICONE HMI INDUPROOF® A GETT brand

FEATURES

- Integrated mousebutton with FSR
- VESA-M5-boreholes (distance 75 x 75 mm)
- IP68 sealing, can be submerged into liquids
- Can be cleaned and desinfected thoroughly
- Special coating for excellent mechanical and chemical resistance
- Robust, durable silicone material
- The keylock function allows the keyboard to be cleaned even during operation (press the keylock button for 3 sec.). Active keylock function is indicated by a red LED in the keylock button.

TECHNICAL DATA

Number of keys:	104
Housing type:	dekstop housing
Material (keypad):	silicone
Material (bottom panel):	plastic
Colour:	grey, black
Keyswitch technology:	carbon contacts
Switching cycles:	2 mill. (per key)
Operating force:	1.5 N / 1.1 N (Num)
Switch travel:	1.4 mm
Protection level:	IP68
Interface:	USB
USB compatibility:	USB V1.1/2.0 compliance
Operating temperature:	-20 °C to +60 °C
Storage temperature:	-25 °C to +70 °C
Dimensions:	340 x 165 x 18.4 mm
Weight:	735 g
Warranty:	4 years on the electrical function

Compliance:	
-- Europe:	CE
-- Global:	REACH, RohS self-declaration

TECHNICAL DATA MOUSEBUTTON

Operating princwiple:	Force sensing resistor
Resolution:	800 cpi

TECHNICAL DATA VESA INSERT NUTS

Thread:	M5
Material:	1.5 mm steel
Recommended screw tightening torque:	3.60 Nm
Resistance to distortion:	8.47 Nm
Axial force:	3110 N

Cat.No.	Product description	Colour	Layout
KG17203	TKG-104-MB-IP68-VESA-GREY-USB-DE	Grey	German
KG17204	TKG-104-MB-IP68-VESA-GREY-USB-US	Grey	US
KG19259	TKG-104-MB-IP68-VESA-BLACK-USB-DE	Black	German
KG21212	TKG-104-MB-IP68-VESA-BLACK-USB-US	Black	US

Other language versions/interfaces/configurations avaible on request.

Subject to modifications and errors

GETT Gerätetechnik GmbH
Mittlerer Ring 1 | 08233 Treuen | Germany
Tel: +49 37468 660-0
Fax: +49 37468 660-66
E-Mail: info@gett.de
Internet: www.gett.de

Gett North America LLC
E-Mail: info@gett-na.com
Internet: www.gett-na.com

Gett Asia Ltd.
E-Mail: info@gett-asia.com
Internet: www.gett-asia.com

gett.de
gett-group.com

Rev1-10-2025

TECHNICAL DRAWING (in mm)

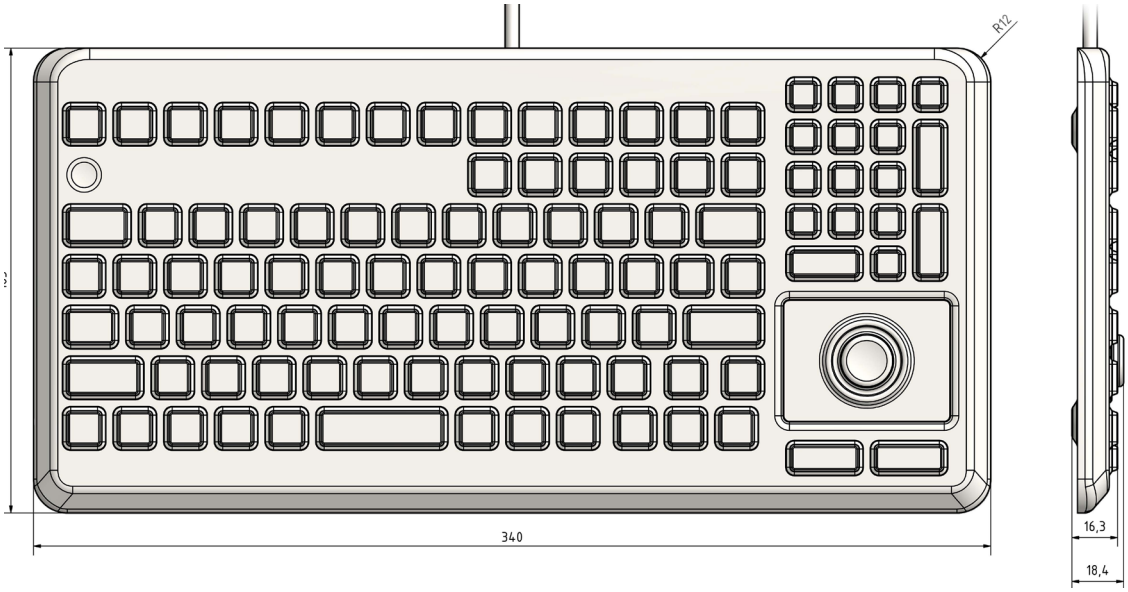

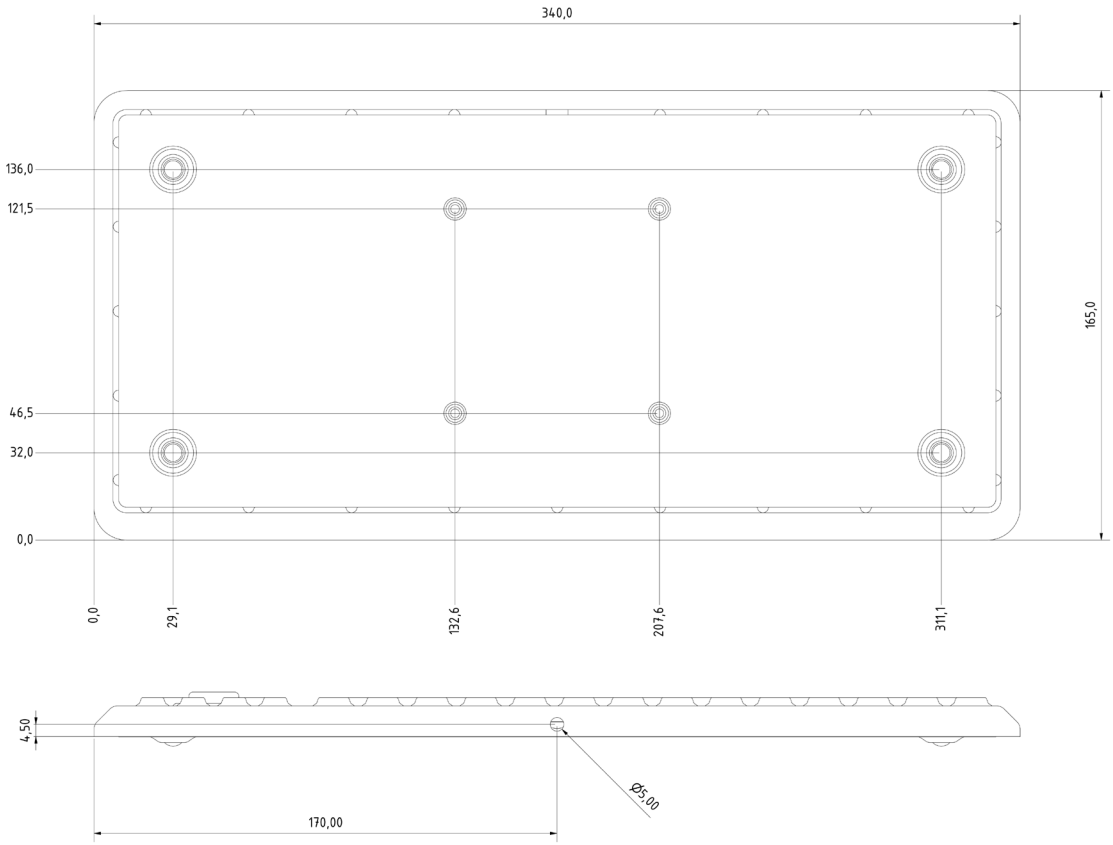

Subject to modifications and errors

GETT Gerätetechnik GmbH
Mittlerer Ring 1 | 08233 Treuen | Germany
Tel: +49 37468 660-0
Fax: +49 37468 660-66
E-Mail: info@gett.de
Internet: www.gett.de

Gett North America LLC
E-Mail: info@gett-na.com
Internet: www.gett-na.com

Gett Asia Ltd.
E-Mail: info@gett-asia.com
Internet: www.gett-asia.com

TECHNICAL DRAWING (in mm)

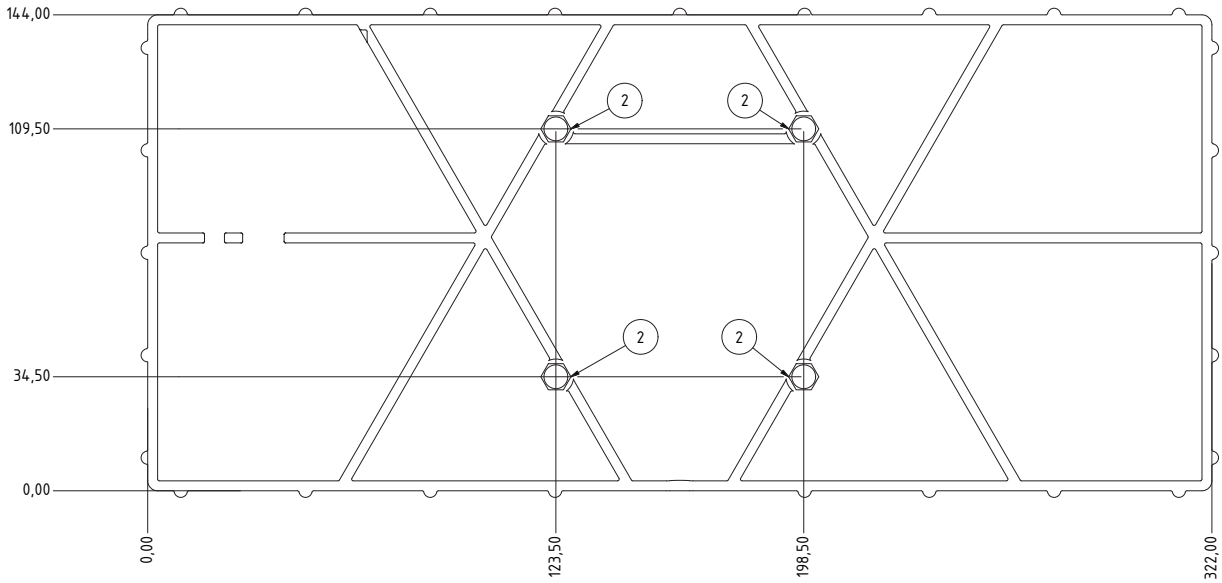

BAUTEILLISTE			
OBJEKT	ANZAHL	BAUTEILNUMMER	BESCHREIBUNG
2	4	BSO-M5-6	

SPECIFICATION

- Rear side integrated VESA screwing holes (distance 75 x 75 mm) can be opened neatly and burr-free by using a 5.2 mm drill; Plastic shavings can be removed with tweezers.

Subject to modifications and errors

GETT Gerätetechnik GmbH
Mittlerer Ring 1 | 08233 Treuen | Germany
Tel: +49 37468 660-0
Fax: +49 37468 660-66
E-Mail: info@gett.de
Internet: www.gett.de

Gett North America LLC
E-Mail: info@gett-na.com
Internet: www.gett-na.com

Gett Asia Ltd.
E-Mail: info@gett-asia.com
Internet: www.gett-asia.com