RESISTANCE THERMOMETER
Measuring insert: Fixed

Type:
RT-RTBC

5860-E230524V2.2


Application:

- For measuring temperatures in moveable parts such as bearings and axles
- For tasks that require easy and quick replacement of temperature sensors

Properties:

- Sensor Pt100 or Pt1000 in acc. with IEC 60751
- Measuring insert: Fixed
- Electrical connection: Cable type TBT (Teflon-Braid-Teflon)
- Process attachment: Bayonet coupling
- Outer protective sheath: Stainless acid-proof steel
- IP67
- Marine approved by: DNV LR, NK, RINA, ABS and BV



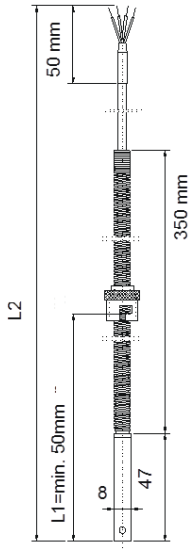

MECHANICAL SPECIFICATIONS:

Protective sheath: ----------
EN 1.4571 (AISI3 16Ti), max. 850°C

Sensor diameter [mm]: ----------
Ø8
Special

Nominal length L1 [mm]: ----------
20 / 47
Special

Process attachment: ----------
Bayonet coupling
Special

Sensor Bottom: ----------
Steel
Silver (For quick reaction)

Connector: ----------
1/4" BSP
Special

Connector length [mm]: ----------
10 / 26 / 50

ELECTRICAL SPECIFICATIONS:

-----Sensor element:
1xPt100
2xPt100
1xPt1000

-----Number of conductors:
2-wire
3-wire
4-wire

-----Media temperatures max:
-50/+200°C
Special

-----Electrical connection:
Cable type TBT (Teflon-Braid-Teflon)
Special

-----Cable length:
3000 mm
Special

-----Tolerance in acc. with IEC 60751:
Type A DIN (i.e.±(0,15+0,002xTactual) °C)
Type B 1/1 DIN (i.e.±(0,3+0,005xTactual) °C)
Type B 1/3 DIN (i.e.±(0,1+0,0017xTactual) °C)
Type B 1/6 DIN (i.e.±(0,05+0,00083xTactual) °C)
Type B 1/10 IN(i.e.±(0,03+0,0005xTactual) °C)
Special

Kjaerulf Pedersen a/s, Taastrupgaardsvej 8-10, DK-2630 Taastrup, Tel.: +45 39760203, sales@kp-as.com, www.kp-as.com

This is provided to you as a service and for information purpose only. While we have attempted to maintain the information as accurately as possible, the page may contain errors or omissions for which we disclaim any and all liability.

RESISTANCE THERMOMETER **Measuring insert: Fixed**	**Type: RT-RTBC**	5860-E230524V2.2


Calibration:
Temperature calibration are used to verify and certify the sensor to have the correct accuracy. We can do either: “In house” or “Accredited” calibration. Accredited is certified by 3.e part. Normally we do a calibration in 3 points.

Enhanced performance services:
Cold applications (below -50°C) will influence the material and the measurement. CRYO treatment is needed to ensure a correct and working sensor down to -196°C.

A sensor will always drift over time, especially when there are high temperature fluctuations.
With “Ageing treatment” we stabilize the sensor to ensure a minimum drift over time. The benefits are long term stability, more correct measurement and easier planning of calibration periods.

Documentation:
Please order the correct documentation when ordering the sensor.



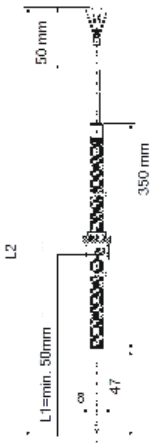

SIGNAL PROCESSING

Enclosure

Marine Box (112x82x42mm) ----------

ABS Box (82x80x56mm) ----------

NONE ----------



Programmable mounted transmitter:

Measuring range min/max: -200/+850°C
Output: 2-wire, 4-20 mA
Min. span: 25°C
Ambient temperature min/max: -40/+85°C

5333A Uninsulated for RTD
5333D EEX Uninsulated for RTD
5332A Uninsulated for RTD
5332D EEX Uninsulated for RTD
5331A Galvanic Isolated RTD / TC
5331D EEX Galvanic Isolated RTD / TC
5335A Hart 5 Protocol Standard
5335D Hart 5 Protocol CSA, FM, ATEX, IECEx
5337A Hart 5 & 7 Protocol
5337D Hart 5 & 7 Protocol CSA, FM, ATEX, IECEx



Transmitter Type:			
4 mA =	C°	20 mA =	C°

5350A Profibus standard
5350B Profibus ATEX, FM and CSA

Link to further information:

Transmitter Overview

Programmable rail mounted transmitter

CALIBRATION

None ----**Calibration:**
In house (Span -33°C - +700°C)

Accredited – in laboratory (-196°C - +1200°C)

1.	Point	°C
2.	Point	°C
3.	Point	°C

More point on request

Enhanced performance services

---**Cryo treatment.**
For temperature sensor under -50°C

---**Ageing:**
For long term stability.
Secure minimum drift of sensor accuracy

---**Documentation**
Certificate: 3.1 Material
Certificate of origin
Certificate of conformity

---**Marine Certificate**
Certificate of DNV
Certificate of BV
Certificate of Rina
Certificate of ClassNK
Certificate of LR
Certificate of ABS

Other on request

Save Print Submit

Kjaerulf Pedersen a/s, Taastrupgaardsvej 8-10, DK-2630 Taastrup, Tel.: +45 39760203, sales@kp-as.com, www.kp-as.com

This is provided to you as a service and for information purpose only. While we have attempted to maintain the information as accurately as possible, the page may contain errors or omissions for which we disclaim any and all liability.