

RESISTANCE THERMOMETER

Measuring insert: Fixed

Type:
RT-REG1S

Sheet No.
1-14 V2.1
5850-E010818V2.1




Application:

- For measuring and regulating exhaust gas in stationary or maritime
 - diesel engines
 - turbines

Properties:

- Media temperatures up to 600°C
- Ambient temperature up to 200°C
- Process attachment: weld-in nipple
- Measuring insert: interchangeable
- Pt100 and Pt1000 resistance thermometer in acc. with IEC 60751, type B1/1DIN
- Mechanical and thermal stress in acc. with DIN 43772
- Cable with clamp, type TGSB (Teflon-Glass Fibre-Braided)
- Constructed to have the greatest possible accuracy and durability during demanding operating conditions
- Outer protective sheath: acid-proof steel
- Marine approved by: DNV.GL, LR, NK, RINA, ABS, and BV

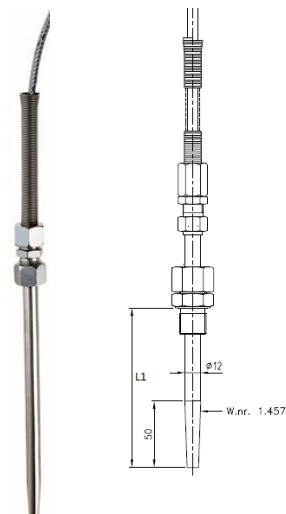

MECHANICAL SPECIFICATIONS

Protective sheath:

EN 1.4571 (AISI 316Ti) max. 850°C
Other on request

Immersion length L1 [mm]:

150 / 200 / 250 / 300
Other on request

Reduced Tip

50 mm
Other on request

Process attachment:

1/2" BSP welded coupling
3/4" BSP welded coupling
Other on request

ELECTRICAL SPECIFICATIONS

1xPt100

Sensor element:

1xPt100
2xPt100
1xPt1000 (only cl. B 1/1 and cl. A)
2xPt1000 (only cl. B 1/1 and cl. A)

3-wire

Number of conductors:

2-wire (recommended only for Pt1000)
3-wire
4-wire

Tolerance in acc. with IEC 60751:

Type A DIN (i.e. $\pm(0,15+0,002 \times \text{Tactual})$ °C)
Type B 1/1 DIN (i.e. $\pm(0,3+0,005 \times \text{Tactual})$ °C)
Type B 1/3 DIN (i.e. $\pm(0,1+0,0017 \times \text{Tactual})$ °C)
Type B 1/6 DIN (i.e. $\pm(0,05+0,00083 \times \text{Tactual})$ °C)
Type B 1/10 DIN (i.e. $\pm(0,03+0,0005 \times \text{Tactual})$ °C)

Cable

SBS (Silicone-Inner Braided-Silicone) max. 180°C
TBT (Teflon-Inner Braided-Teflon) max. 250°C
TGSB (Teflon-Glass Fibre-Braided) max. 250°C
Other on request

Cable length [m]:

Link for further information: [Pt100 Tolerance](#)

THERMOCOUPLE THERMOMETER
Measuring insert: Fixed

Type:
TC-TEG1S

Sheet No.
3-36 V2

5850-E010818V2




Application:

- For measuring and regulating exhaust gas in stationary or maritime
 - diesel engines
 - turbines

Properties:

- Media temperatures up to 850°C
- Ambient temperature up to 200°C
- Process attachment: Adjustable nipple
- Immersion length: Adjustable
- Measuring insert: Fixed
- Tolerance in acc. with:
DIN IEC 584-1, DIN IEC 584-2, DIN 43710
- Constructed to have the greatest possible accuracy and durability during demanding operating conditions
- Outer protective tube: Stainless acid-proof steel
- Marine approved by: DNV, LR, GL, NK, RINA, ABS and BV

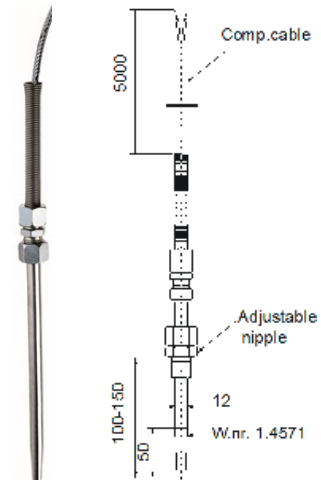

MECHANICAL SPECIFICATIONS:

Protective tube: -----
Thermowell, EN 1.4571 (AISI 316Ti)

Sensor diameter [mm]: -----
Ø12
Special

Immersion length L1 [mm]: -----
150 / 200 / 250 / 300
Special

Reduced protection tube end on sensor: -----
50 mm
Special

Process attachment: -----
1/2" BSP
3/4" BSP
Special

ELECTRICAL SPECIFICATIONS

Cable
TGSB (Teflon-glass Fibre-braided)
SGSB (Silicone-Glass Fibre-Braided)
Special

Cable length [m]:

Sensor element:
Type K (NiCr-Ni) max. +1150°C
Type J (Fe-CuNi) max. +700°C
Type E (NiCr-CuNi) max. +800°C
Type N (NiCrSi-Ni) max +1250°C
Special

Number of thermocouples:
1xTC
2xTC

Tolerance in acc. with DIN 43732:
Class 1 for K,J,N,E (i.e. $\pm 1,5^{\circ}\text{C}$ or $\pm(0,0040 \times T)$)
Class 2 for K,J,N,E (i.e. $\pm 2,5^{\circ}\text{C}$ or $\pm(0,0075 \times T)$)
Class 1 for T (i.e. $\pm 0,5^{\circ}\text{C}$ or $\pm(0,0040 \times T)$)
Class 2 for T (i.e. $\pm 1,5^{\circ}\text{C}$ or $\pm(0,0075 \times T)$)

Link for further information: [Pt100 Tolerance](#)

THERMOCOUPLE THERMOMETER

Measuring insert: Fixed

Type:
TEG1S

Sheet No.
3-36 V2
5850-E010818V2



Calibration:

Temperature calibration are used to verify and certify the sensor to have the correct accuracy. We can do either: "In house" or "Accredited" calibration. Accredited is certified by 3.e part. Normally we do a calibration in 3 points.

Enhanced performance services:


Cold applications (below -50°C) will influence the material and the measurement. CRYO treatment is needed to ensure a correct and working sensor down to -196°C.

A sensor will always drift over time, especially when there are high temperature fluctuations.

With "Ageing treatment" we stabilize the sensor to ensure a minimum drift over time. The benefits are long term stability, more correct measurement and easier planning of calibration periods.

Documentation:

Please order the correct documentation when ordering the sensor.

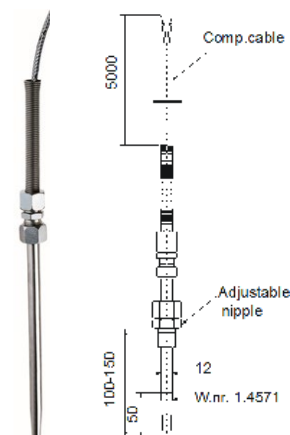

SIGNAL PROCESSING

Enclosure

Marine Box (112x82x42mm) ☐

ABS Box (82x80x56mm) ☐

NONE ☐

Programmable mounted transmitter:

[5333A Uninsulated for RTD](#)

[5333D EEX Uninsulated for RTD](#)

[5332A Uninsulated for RTD](#)

[5332D EEX Uninsulated for RTD](#)

[5334A Uninsulated for TC](#)

[5334B Galvanic Isolated TC](#)

[5331A Galvanic Isolated RTD / TC](#)

[5331D EEX Galvanic Isolated RTD / TC](#)

[5335A Hart 5 Protocol Standard](#)

[5335D Hart 5 Protocol CSA, FM, ATEX, IECEx](#)

[5337A Hart 5 & 7 Protocol](#)

[5337D Hart 5 & 7 Protocol CSA, FM, ATEX, IECEx](#)

Transmitter Type:		
4 mA =		C°
20 mA =		C°

[5350A Profibus standard](#)

[5350B Profibus ATEX, FM and CSA](#)

Link to further information:

[Transmitter Overview](#)

[Programmable rail mounted transmitter](#)

CALIBRATION

None

Calibration:

In house (Span -33°C - +700°C)

Accredited – in laboratory (-196°C - +1200°C)

1.	Point		°C
2.	Point		°C
3.	Point		°C

More point on request

Enhanced performance services

☐

Cryo treatment.

For temperature sensor under -50°C

☐

Ageing:

For long term stability.
Secure minimum drift of sensor accuracy

☐

Documentation

Certificate: 3.1 Material
Certificate of origin
Certificate of conformity

☐

Marine Certificate

Certificate of DNV.GL
Certificate of BV
Certificate of Rina
Certificate of ClassNK
Certificate of LR
Certificate of ABS

Other on request

Save

Print

Submit