

RN Series I/O Power Supply



- Feature
 - 1 Form NO and 1 Form C configurations
 - 4.0kV dielectric strength (between coil and contacts)
 - Operation time:8 ms max.
 - Miniature in size,save space
 - Screw mounting or Push-in Plug available

RN	-	U024	S
I/O Relay		Coil Voltage U012:AC/DC 12V U024:AC/DC 24V U048:AC/DC 48V U110:AC/DC 110V U220:AC/DC 220V	Socket Type E: Screw Terminal Connection S: Push-in Connection

Kits			
Order Number		Specification	
Screw terminal	Push-in Connector	Control Voltage	Load(Resistive)
RN-U012E	RN-U012S	AC/DC : 12V	6A 250VAC/30VDC
RN-U024E	RN-U024S	AC/DC : 24V	
RN-U048E	RN-U048S	AC/DC : 48V	
RN-U060E	RN-U060S	AC/DC : 60V	
RN-U0110E	RN-U0110S	AC/DC : 110V	
RN-U0220E	RN-U0220S	AC/DC : 220V	


More technical information, please refer to data sheet of the products

Dimension & Wiring Diagram


Unit : mm

RL-N05E□ Series Screw Terminal

Dimension

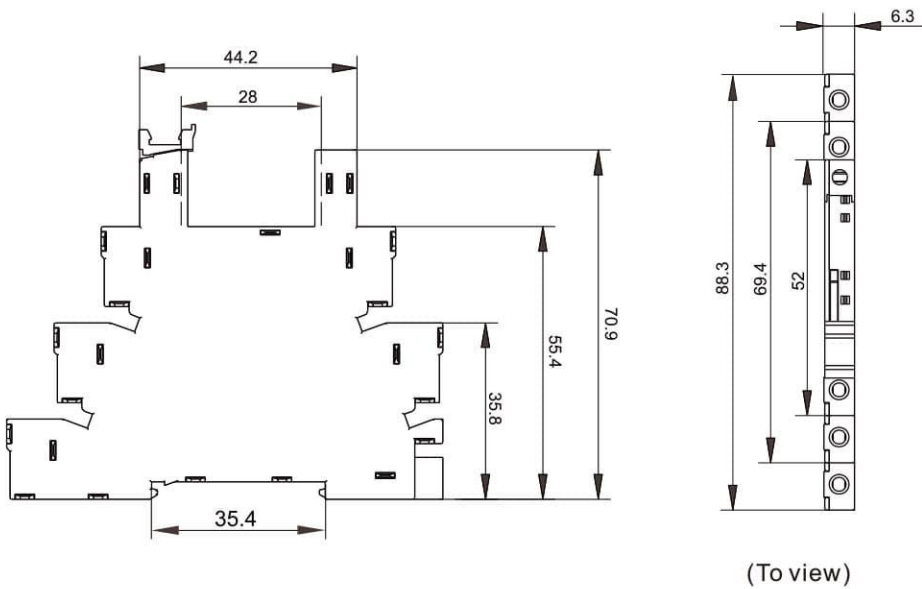

Wiring Diagram

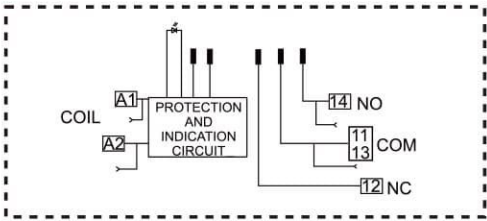

■ I/O Wiring adapter, Cross connector



RL-NR

I/O Wiring adapter



RLJ-NB



RLJ-NK



RLJ-NR

Cross connector